


1



DISASSEMBLE CAMERA DOME
 REMOVING BASE AND LOCKING PLATE



2

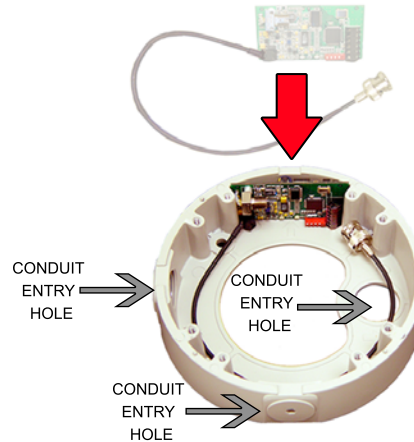


INSERT BT-1U-X UNIT INTO WIDE OPENING BETWEEN SCREW POSTS.
 WE SUGGEST TO AVOID LOCATIONS WITH CONDUIT ENTRY HOLES.
 THIS WAY WHEN BOARD IS INSERTED, UNIT WILL NOT ABSTRACT ANY
 ACCESS FOR CABLES.

3

- CONNECT POWER (24VAC) TO BT-1U-X (DIAGRAM 1).
 - CONNECT FIBER CABLE (DIAGRAM 1).
- AT THIS TIME IT IS POSSIBLE TO USE BT-1U-X BUILD-IN VIDEO
 GENERATOR TO TEST FUNCTIONALITY OF THE SYSTEM WITHOUT
 CAMERA CONNECTED.

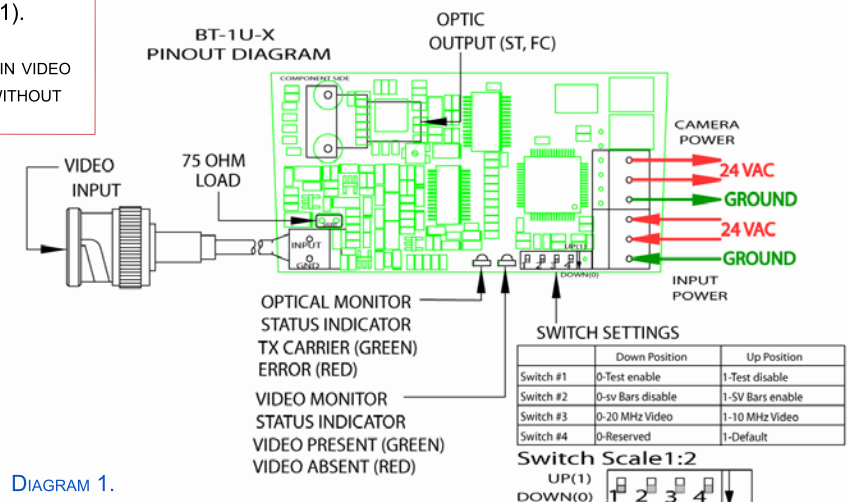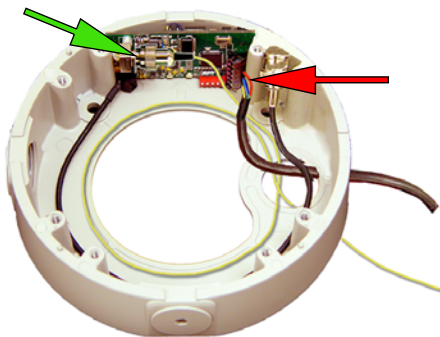

4

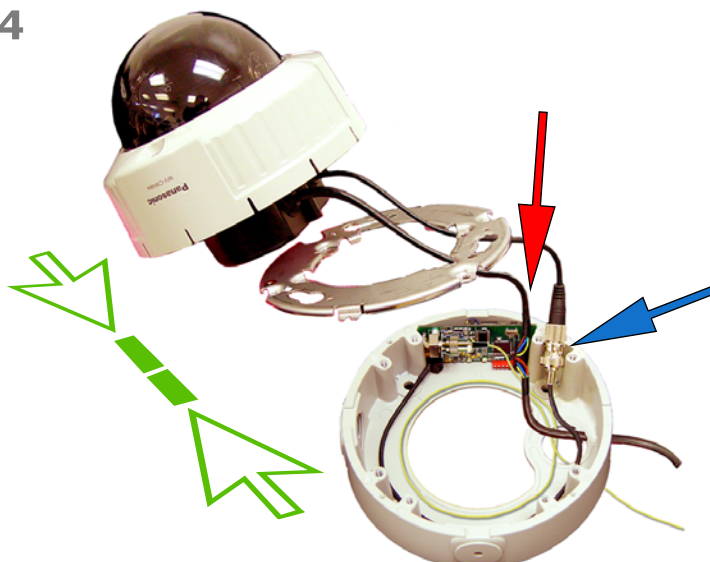

- CONNECT POWER CABLE FROM CAMERA (DIAGRAM 1).
 - CONNECT COAX CABLE FROM CAMERA (DIAGRAM 1).
- MAKE SURE ALL CABLES ARE ARRANGED PROPERLY.
 IT IS RECOMMENDED TO INSULATE BNC-TYPE CONNECTOR
 USING ELECTRICAL TAPE TO AVOID ELECTRICAL SHORTAGES.

PERFORM FINAL ASSEMBLY ATTACHING LOCKING PLATE
 AND DOME TO THE BASE.