



Installation/Operation Instructions

Fiber Optic Video & PTZ Control Data Transmission System

Part Number:

DTDR-4V/4P-x Series ***(4-Channel Panasonic video/data channels)***

Meridian Technologies, Inc.
700 Elmont Road, Elmont NY 11003
Telephone : 516. 285. 1000 Fax: 516. 285. 6300
E-mail : sales@meridian-tech.com Web: www.meridian-tech.com

Table of Contents

1.0 Product Description	3
2.0 Installation	3
3.0 Part Number Configuration.....	3
4.0 Product Signal Format & Specifications	4
5.0 Front Panel Pinout Assignment & Status Indicator Diagram.....	5
5.1 Status Indicators	5
6.0 Troubleshooting.....	6

1.0 Product Description

Meridian's product series DT-4V/4P and DR-4V/4P are fiber optic modems that transmit four (4) channels of uni-directional, fixed video signals and four (4) Panasonic video/data channels over one optical fiber using digital transmission technologies. This product series uses Meridian's standard 2-slot wide chassis mount card assembly and plugs into the following Meridian chassis: SR-1000, SR-1200/S, SR-1500/S, and SR-2001 & SR-2000 series 19" equipment chassis.

The digital modules consist of various plug-in personality function cards or SIMs. The top card is the optical card that contains the fiber optic interface. The optical input & output connectors are located on the right side of the module. Each of the next SIMs contain one channel each of the Panasonic 'up-the-coax' video / data interface.

2.0 Installation

Series DT-4V/4P and DR-4V/4P products are two-slot wide cards and, as such, occupy two slots in Meridian's standard chassis (SR-1000, SR-1200/S, SR-1500/S, and SR-2001 & SR-2000 series 19" equipment chassis). To install in the chassis, orient the card with the Meridian logo at the top of the module and slide onto the top and bottom card guides in the chassis. Press securely on the top and bottom of the module to ensure that it is fully seated in the chassis so that the electrical connector mates with the chassis-mounted motherboard. Once installed, manually tighten the two thumbscrews located at the top and bottom of the card. Do not use tools to secure these and do not over tighten.

Note: A fully loaded subrack should have forced-air cooling to avoid excessive heat generation inside the chassis. A fan assembly tray (P/N FA-2000) with three (3) fans is available and should be installed under the 19" SR-2000/1 whenever possible.

3.0 Part Number Configuration

The table below shows the various product part numbers available.

Transmitter	Receiver	# up-the-coax video	Fiber Type	Optical Connector
DT-4V/4P-2R/M	DR-4V/4P-2R/M	4	Multimode	ST
DT-4V/4P-5R/M	DR-4V/4P-5R/M	4	Singlemode	FC
DT-4V/4P-5R/M-ST	DR-4V/4P-R/M-5ST	4	Singlemode	ST

Note: The suffix "R" or "M" refers to either a rack mount unit ('R' suffix) or a stand alone module ('M' suffix). The stand alone unit comes with the SR-1000, 2-slot chassis. When specifying the part number, use only the "R" or "M" suffix.

4.0 Product Signal Format & Specifications

The DT & DR-4V/4P series products transmit and receive the following signals:

Signal Type	Channels	Transmit	Receive
Panasonic video ~ data	4	Yes	Yes

The tables below identify the specifications for the various signals that these modems transmit/receive.

Video	
Format	NTSC, PAL, SECAM
Channels 1-8	Panasonic video ~ data ('up-the-coax')
Voltage/Impedance	1Vp-p, 75 Ω , 1.5Vp-p (max)
Differential Gain	<0.6 %
Differential Phase	<0.3 $^{\circ}$
SNR	>60dB (weighted)
Return Loss	>30dB
Field Tilt	<0.5%

Connectors	
Video	75 Ω BNC w/gold center pin
Optical	Singlemode – ST or FC Multimode - ST

Optical Specifications						
Fiber Type/Size (um)	Optical Output (dBm)	Rx Sensitivity (dBm)	Optical Budget (dB)	Wavelength (nm)	Optical connector	Optical Dynamic Range (dB)
Multimode (FP Laser) 62.5/125	-3	-24	21	1300/850	ST	24
Singlemode (FP Laser) 9/125	-3	-24	21	1310/1 550	ST, FC	24
Singlemode (DFB Laser) 9/125	~3	-24	27	1310/1550	ST, FC	24

Note: Because of the characteristics of the Panasonic signal, the maximum operating distance between the camera and controller is approximately 2KM. This distance includes the length of the fiber and coaxial cable length.

DR-4V / 4P-X

PINOUT DIAGRAM

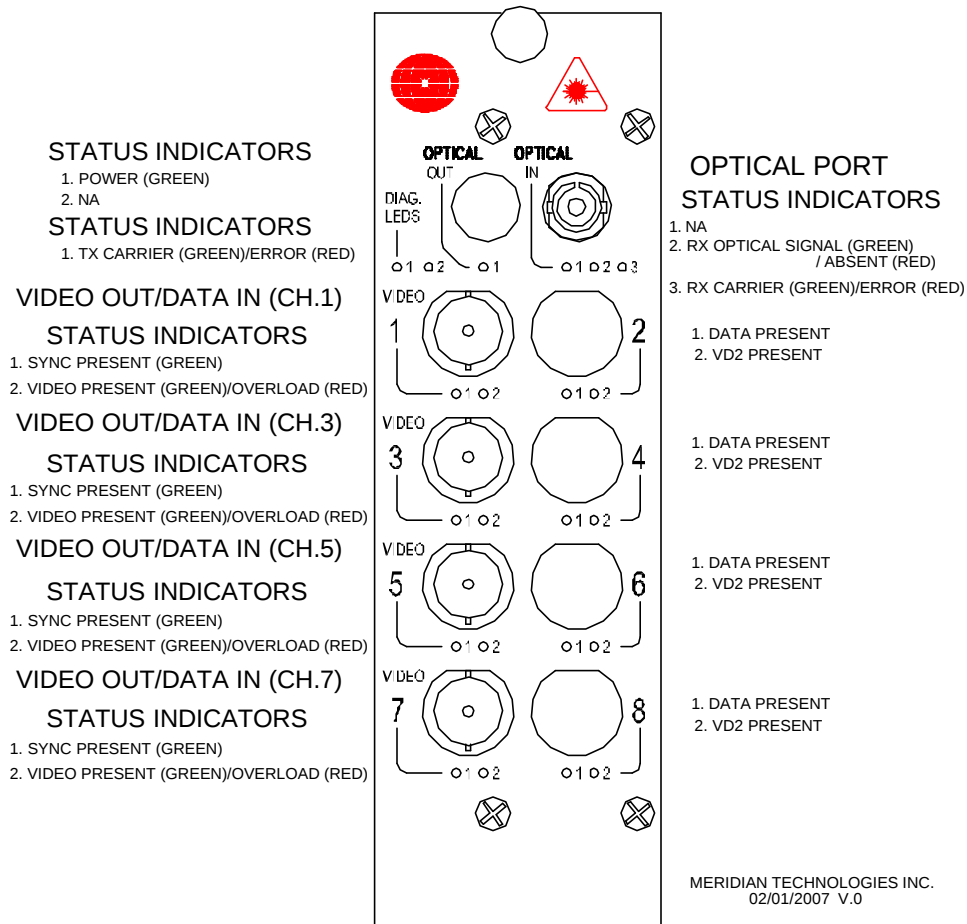


Figure 5.2
DR-4V/4P Front Panel Layout

5.1 Status Indicators

There are status indicator lights associated with each video and up-the-coax data channel. The Transmitter (DT-4V/4P) and Receiver (DR-4V/4P) indicators are as follows:

Power:	Green (ON)
Tx Carrier:	Green (OK)/Red (Error)
Rx Optical Signal:	Green (Present)/Red (Absent)
Rx Carrier Signal:	Green (Present)/Red (Error)
Video Sync:	Green (Present) – one for each channel
Video:	Green (Present)/ Red (video input Overload) – one for each channel
Data present:	Green (OK) – available only for up-the-coax channels

Refer to the front panel diagrams in section 5.0 for the location of each indicator light.

6.0 Troubleshooting

Below is a listing of several problems that may arise during the installation & operation of the modules. If you are having difficulty installing or operating the modules please refer to this list below.

Problem: *Module does not fit in chassis slots*

Action: Check module orientation. Meridian “Globe” must be oriented on the top left hand side of the module. Make sure the card guides in the chassis are aligned with the extrusion on the module

Problem: *Card power LED does not light when power to the module/subrack is applied or Power indicator turns on and off*

Action: Check power supply to ensure that it is plugged in and turned on. If flashing continues, move module to another chassis or location in the same chassis, if available.

Problem: *No video at output of module*

Action: Check to ensure that the video channel-specific LEDs are on (Green). Also, check to ensure that the optical LEDs are ON. If no video is still present, check to ensure that the monitor is ON and the video cable is connected to the correct video port on the Rx module.

Problem: *Video image is dark*

Action: Check the iris control on the camera to ensure that it is open to the proper amount for the conditions

Problem: *Video image is too bright and appears overexposed*

Action: Check the Video overload indicator on the Rx module. If it is Red, the video signal level is too high and the CCTV iris should be checked to ensure that it is open properly for the conditions.

Problem: *No up-the-coax control*

Action: Check to ensure that the up-the-coax video cables are connected to the appropriate input/output BNC connectors. Check to ensure that the proper connections are made to the PTZ controller.

Check to ensure that the total camera to controller distance has not exceeded to 2km maximum distance. If longer than 2km, the video will still work but the camera control may not function or the operation may be erratic.

As you move the camera using the controller, check to see if the ‘Data Present’ lights associated with each of the up-the-coax channels (DR unit) are blinking. If not, check the data connections to the controller.

If the problem still persists after reviewing the above items, please contact Meridian technical support (516- 285-1000).

Meridian Technologies, Inc
700 Elmont Road, Elmont, NY 11003, USA
Tel: 516-285-1000 Fax: 516-285-6300
E-mail: support@meridian-tech.com
www.meridian-tech.com
Document Version 1.0
10/13/2008