


ST-1A1G/1G-X

PINOUT DIAGRAM

STATUS INDICATORS

PWR - POWER (GREEN)
DIAG - N/A
TX C/L - TX CARRIER (GREEN)
 / OVERLOAD (RED)
RX C/E - RX CARRIER (GREEN)
 / ERROR (RED)
SYN - N/A
VID - N/A

- 1 - (CH.1) DATA OUTPUT
- 2 - N/A
- 3 -
- 4 - N/A
- 5 - N/A
- 6 - N/A
- 7 - (CH.1) DATA INPUT
- 8 - N/A
- 9 - (CH.1) AUDIO INPUT
- 10 - N/A
- 11 - N/A
- 12 - N/A

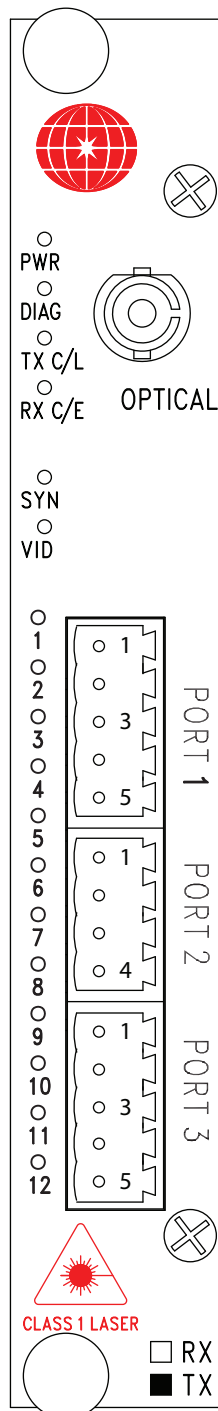

OPTICAL PORT (ST, FC)

AUDIO INPUT (PORT 1)

- 1. (CH.1) AUDIO INPUT-
- 2. (CH.1) AUDIO INPUT+
- 3. NA
- 4. NA
- 5. GND

MULTI PROTOCOL DATA (PORT 3)

PIN #	RS-232	RS-422	RS-485 2W	RS-485 4W
1	CH1 IN (RD)	CH1 IN-	CH1 IN/OUT-	CH1 IN-
2		CH1 IN+	CH1 IN/OUT+	CH1 IN+
	CH1 OUT (TD)	CH1 OUT-		CH1 OUT-
4		CH1 OUT+		CH1 OUT+
5	GND	GND	GND	GND


SR-1A1G/1G-X

PINOUT DIAGRAM

STATUS INDICATORS

PWR - POWER (GREEN)
DIAG - N/A
TX C/L - TX CARRIER (GREEN)
/ OVERLOAD (RED)
RX C/E - RX CARRIER (GREEN)
/ ERROR (RED)
SYN - N/A
VID - N/A

- 1 - (CH.1) DATA OUTPUT
- 2 - N/A
- 3 - (CH.1) AUDIO OUTPUT
- 4 - N/A
- 5 - N/A
- 6 - N/A
- 7 - (CH.1) DATA INPUT
- 8 - N/A
- 9 - N/A
- 10 - N/A
- 11 - N/A
- 12 - N/A

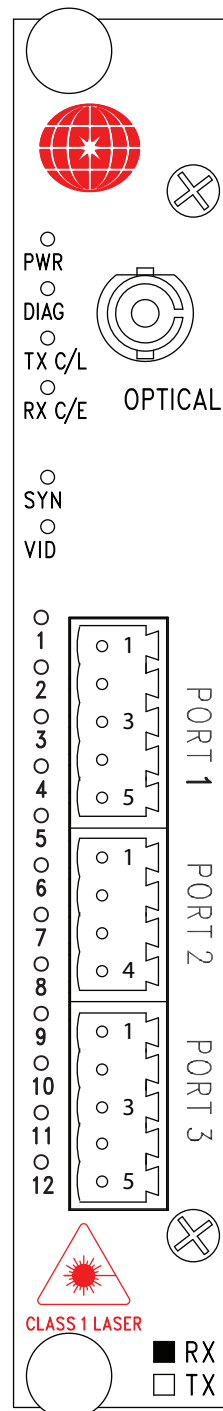

OPTICAL PORT (ST, FC)

AUDIO OUTPUT (PORT 1)

- 1. (CH.1) AUDIO OUTPUT-
- 2. (CH.1) AUDIO OUTPUT+
- 3. NA
- 4. NA
- 5. GND

MULTI PROTOCOL DATA (PORT 3)

PIN #	RS-232	RS-422	RS-485 2W	RS-485 4W
1	CH1 IN (RD)	CH1 IN-	CH1 IN/OUT-	CH1 IN-
2		CH1 IN+	CH1 IN/OUT+	CH1 IN+
3	CH1 OUT (TD)	CH1 OUT-		CH1 OUT-
4		CH1 OUT+		CH1 OUT+
5	GND	GND	GND	GND