

PINOUT DIAGRAM


SXA/SXB-2A2G/2A2G-x

STATUS INDICATORS

PWR - POWER (GREEN)
 DIAG - NA
 TX C/L - TX CARRIER (GREEN)
 /OVERLOAD (RED)
 RX C/E - RX CARRIER (GREEN)
 /ERROR (RED)

SYN - NA
 VID - NA

DR1 - (CH.1) DATA OUTPUT
 DR2 - (CH.2) DATA OUTPUT
 AR1 - (CH.1) AUDIO OUTPUT
 AR2 - (CH.2) AUDIO OUTPUT
 CR1 - NA
 CR2 - NA
 DT1 - (CH.1) DATA INPUT
 DT2 - (CH.2) DATA INPUT
 AT1 - (CH.1) AUDIO INPUT
 AT2 - (CH.2) AUDIO INPUT
 CT1 - NA
 CT2 - NA

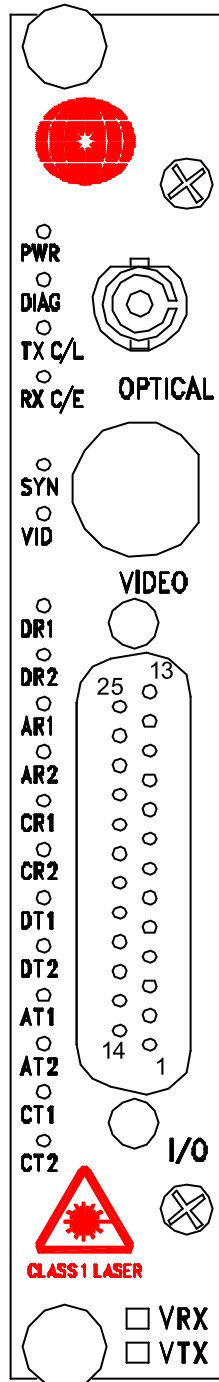

OPTICAL PORT (ST, FC)

**MULTI-PROTOCOL DATA "G" CONFIGURATION IN DEFAULT SETTING
 SET TO RS-232 DRIVER**

AUDIO/DATA INPUT/OUTPUT (DB-25 FEMALE)

- 22. (CH.1) AUDIO INPUT-
- 10. (CH.1) AUDIO INPUT+
- 12. (CH.1) AUDIO OUTPUT-
- 24. (CH.1) AUDIO OUTPUT+
- 23. (CH.2) AUDIO INPUT-
- 11. (CH.2) AUDIO INPUT+
- 13. (CH.2) AUDIO OUTPUT-
- 25. (CH.2) AUDIO OUTPUT+
- 4. (CH.1) RS232 INPUT / RS422 INPUT- / RS485 (4W) INPUT- / (CH.1) RS485 (2W) INPUT/OUTPUT-
- 16. (CH.1) RS422 INPUT+ / RS485 (4W) INPUT+ / (CH.1) RS485 (2W) INPUT/OUTPUT+
- 2. (CH.2) RS232 INPUT / RS422 INPUT-
- 14. (CH.2) RS422 INPUT+
- 5. (CH.1) RS232 OUTPUT / RS422 OUTPUT- / RS485 (4W) OUTPUT- / (CH.2) RS485 (2W) INPUT/OUTPUT-
- 17. (CH.1) RS422 OUTPUT+ / RS485 OUTPUT+(4W) / (CH.2) RS485 (2W) INPUT/OUTPUT+
- 3. (CH.2) RS232 OUTPUT / RS422 OUTPUT-
- 15. (CH.2) RS422 OUTPUT+
- 19. +5V
- 1. GND
- 7. GND