

DT-2W6C1G/6C1G-47/49CD

OPTICAL PORT

STATUS INDICATORS

1. POWER (GREEN)
2. CARD DIAGNOSTIC (GREEN-OK/ RED-ALLARM)

STATUS INDICATORS

1. TX CARRIER (GREEN)/ERROR (RED)

VIDEO INPUT (CH.1)

STATUS INDICATORS

1. SYNC PRESENT (GREEN)
2. VIDEO PRESENT (GREEN)/OVERLOAD (RED)

DATA INPUT (PORT 2)

HD-15 FEMALE

1. (CH.1) INPUT
2. (CH.2) INPUT
3. (CH.3) INPUT
4. (CH.4) INPUT
5. GND
6. (CH.5) INPUT
7. (CH.6) INPUT
- 8.-15. NA

DATA OUTPUT (PORT 3)

HD-15 FEMALE


1. (CH.1) OUTPUT
2. (CH.1) OUTPUT
3. (CH.2) OUTPUT
4. (CH.2) OUTPUT
5. GND
6. (CH.3) OUTPUT
7. (CH.3) OUTPUT
8. (CH.4) OUTPUT
9. (CH.4) OUTPUT
10. (CH.5) OUTPUT
11. (CH.5) OUTPUT
12. (CH.6) OUTPUT
13. (CH.6) OUTPUT
- 14.-15. NA

MULTI PROTOCOL DIGITAL (PORT 4)

PINOUT DIAGRAM

PIN #	RS-232	RS-422	RS-485 2W	RS-485 4W
1		CH1 IN+	CH1 IN/OUT+	CH1 IN+
2	CH1 OUT (TD)			
3	CH1 IN (RD)			
4		CH1 IN-	CH1 IN/OUT-	CH1 IN-
5	GND	GND	GND	GND
6		CH1 OUT+		CH1 OUT+
7	CH2 IN (RTS)			
8	CH2 OUT(CTS)			
9		CH1 OUT-		CH1 OUT-

PINOUT DIAGRAM

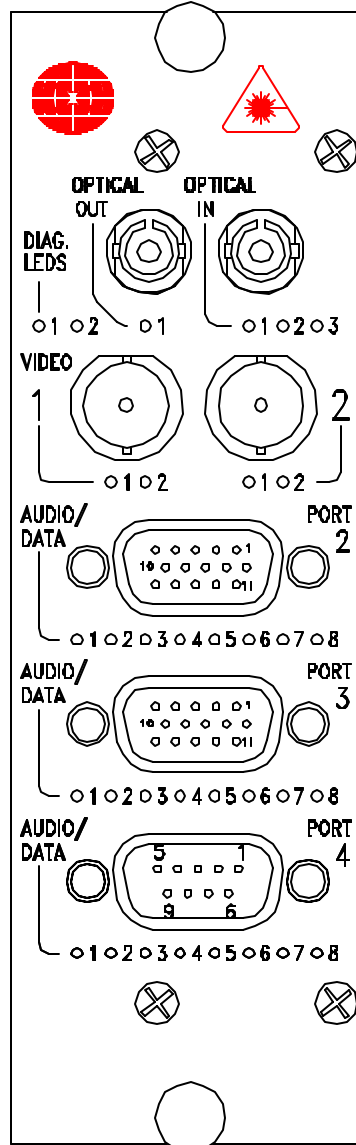

OPTICAL PORT

STATUS INDICATORS

1. RX OPTICAL SIGNAL (GREEN)/ ABSENT (RED)
2. NA
3. RX CARRIER (GREEN)/ERROR (RED)

VIDEO INPUT (CH.2)

STATUS INDICATORS

1. SYNC PRESENT (GREEN)
2. VIDEO PRESENT (GREEN)/OVERLOAD (RED)

STATUS INDICATORS (PORT 2)

1. (CH.1) INPUT PRESENT
2. (CH.2) INPUT PRESENT
3. (CH.3) INPUT PRESENT
4. (CH.4) INPUT PRESENT
5. (CH.5) INPUT PRESENT
6. (CH.6) INPUT PRESENT
7. NA
8. NA

STATUS INDICATORS (PORT 3)

1. (CH.1) OUTPUT PRESENT
2. (CH.2) OUTPUT PRESENT
3. (CH.3) OUTPUT PRESENT
4. (CH.4) OUTPUT PRESENT
5. (CH.5) OUTPUT PRESENT
6. (CH.6) OUTPUT PRESENT
7. NA
8. NA

STATUS INDICATORS (PORT 4)

1. (CH.1) DATA INPUT
2. NA
3. (CH.1) DATA OUTPUT
4. NA
5. (CH.2) DATA INPUT
6. NA
7. (CH.2) DATA OUTPUT
8. NA

INTERNAL JUMPER SETTINGS

1*	2	3	4
RS-232	RS-422	RS-485 2W	RS-485 4W

*FACTORY SETTINGS

MERIDIAN TECHNOLOGIES INC.
700 ELMONT ROAD, ELMONT, N.Y. 11003
Support: 516-285-1000,
919-847-6638, 858-605-1070
WWW.MERIDIAN-TECH.COM
FILE NAME: DTDR-2V6C-6C.DWG
08/23/2011 V.0

DR-2W6C1G/6C1G-49/47CD

PINOUT DIAGRAM

OPTICAL PORT

STATUS INDICATORS

1. POWER (GREEN)
2. CARD DIAGNOSTIC (GREEN-OK/ RED-ALLARM)

STATUS INDICATORS

1. TX CARRIER (GREEN)/ERROR (RED)

VIDEO OUTPUT (CH.1)

STATUS INDICATORS

1. SYNC PRESENT (GREEN)
2. VIDEO PRESENT (GREEN)/OVERLOAD (RED)

DATA OUTPUT (PORT 2)

HD-15 FEMALE

1. (CH.1) OUTPUT
2. (CH.1) OUTPUT
3. (CH.2) OUTPUT
4. (CH.2) OUTPUT
5. GND
6. (CH.3) OUTPUT
7. (CH.3) OUTPUT
8. (CH.4) OUTPUT
9. (CH.4) OUTPUT
10. (CH.5) OUTPUT
11. (CH.5) OUTPUT
12. (CH.6) OUTPUT
13. (CH.6) OUTPUT
- 14.-15. NA

DATA INPUT (PORT 3)


HD-15 FEMALE

1. (CH.1) INPUT
2. (CH.2) INPUT
3. (CH.3) INPUT
4. (CH.4) INPUT
5. GND
6. (CH.5) INPUT
7. (CH.6) INPUT
- 8.-15. NA

MULTI PROTOCOL DIGITAL (PORT 4)

PINOUT DIAGRAM

PIN #	RS-232	RS-422	RS-485 2W	RS-485 4W
1		CH1 IN+	CH1 IN/OUT+	CH1 IN+
2	CH1 OUT (TD)			
3	CH1 IN (RD)			
4		CH1 IN-	CH1 IN/OUT-	CH1 IN-
5	GND	GND	GND	GND
6		CH1 OUT+		CH1 OUT+
7	CH2 IN (RTS)			
8	CH2 OUT (CTS)			
9		CH1 OUT-		CH1 OUT-

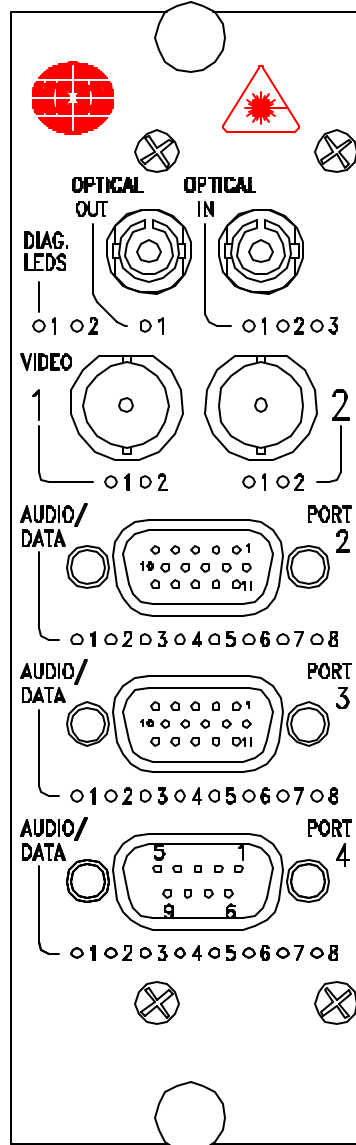

OPTICAL PORT

STATUS INDICATORS

1. RX OPTICAL SIGNAL (GREEN)/ ABSENT (RED)
2. NA
3. RX CARRIER (GREEN)/ERROR (RED)

VIDEO OUTPUT (CH.2)

STATUS INDICATORS

1. SYNC PRESENT (GREEN)
2. VIDEO PRESENT (GREEN)/OVERLOAD (RED)

STATUS INDICATORS (PORT 2)

1. (CH.1) OUTPUT PRESENT
2. (CH.2) OUTPUT PRESENT
3. (CH.3) OUTPUT PRESENT
4. (CH.4) OUTPUT PRESENT
5. (CH.5) OUTPUT PRESENT
6. (CH.6) OUTPUT PRESENT
7. NA
8. NA

STATUS INDICATORS (PORT3)

1. (CH.1) INPUT PRESENT
2. (CH.2) INPUT PRESENT
3. (CH.3) INPUT PRESENT
4. (CH.4) INPUT PRESENT
5. (CH.5) INPUT PRESENT
6. (CH.6) INPUT PRESENT
7. NA
8. NA

STATUS INDICATORS (PORT 4)

1. (CH.1) DATA INPUT
2. NA
3. (CH.1) DATA OUTPUT
4. NA
5. (CH.2) DATA INPUT
6. NA
7. (CH.2) DATA OUTPUT
8. NA

INTERNAL JUMPER SETTINGS

1*	2	3	4
RS-232	RS-422	RS-485 2W	RS-485 4W

*FACTORY SETTINGS

MERIDIAN TECHNOLOGIES INC.
700 ELMONT ROAD, ELMONT, N.Y. 11003
Support: 516-285-1000,
919-847-6638, 858-605-1070
WWW.MERIDIAN-TECH.COM
FILE NAME: DTD-2V6C-6C.DWG
08/23/2011 V.0