

DT-4V(W)1G/1G-X

PINOUT DIAGRAM

STATUS INDICATORS

1. POWER (GREEN)
2. NA

STATUS INDICATORS

1. TX CARRIER (GREEN)/ERROR (RED)

VIDEO INPUT (CH.1)


STATUS INDICATORS

1. SYNC PRESENT (GREEN)
2. VIDEO PRESENT (GREEN)/OVERLOAD (RED)

VIDEO INPUT (CH.3)

STATUS INDICATORS

1. SYNC PRESENT (GREEN)
2. VIDEO PRESENT (GREEN)/OVERLOAD (RED)

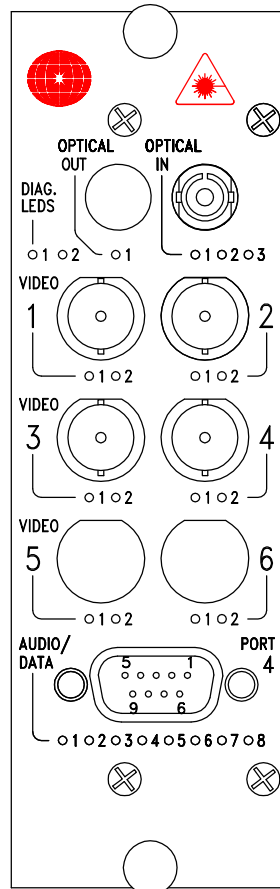

OPTICAL PORT

STATUS INDICATORS

1. NA
2. RX OPTICAL SIGNAL (GREEN)/ABSENT (RED)
3. RX CARRIER (GREEN)/ERROR (RED)

VIDEO INPUT (CH.2)

STATUS INDICATORS

1. SYNC PRESENT (GREEN)
2. VIDEO PRESENT (GREEN)/OVERLOAD (RED)

VIDEO INPUT (CH.4)

STATUS INDICATORS

1. SYNC PRESENT (GREEN)
2. VIDEO PRESENT (GREEN)/OVERLOAD (RED)

STATUS INDICATORS (PORT 4)

1. (CH.1) DATA INPUT
2. NA
3. (CH.1) DATA OUTPUT
4. NA
5. NA
6. NA
7. NA
8. NA

MULTI PROTOCOL DIGITAL (PORT 4) PINOUT DIAGRAM

PIN #	RS-232	RS-422	RS-485 2W	RS-485 4W
1		CH1 IN+	CH1 IN/OUT+	CH1 IN+
2	CH1 OUT (TD)			
3	CH1 IN (RD)			
4		CH1 IN-	CH1 IN/OUT-	CH1 IN-
5	GND	GND	GND	GND
6		CH1 OUT+		CH1 OUT+
7	NA			
8	NA			
9		CH1 OUT-		CH1 OUT-

INTERNAL JUMPER SETTINGS

1*	2	3	4
RS-232	RS-422	RS-485 2W	RS-485 4W

*FACTORY SETTINGS

DR-4V(W)1G/1G-X

PINOUT DIAGRAM

STATUS INDICATORS

1. POWER (GREEN)
2. NA

STATUS INDICATORS

1. TX CARRIER (GREEN)/ERROR (RED)

VIDEO OUTPUT (CH.1)


STATUS INDICATORS

1. SYNC PRESENT (GREEN)
2. VIDEO PRESENT (GREEN)/OVERLOAD (RED)

VIDEO OUTPUT (CH.3)

STATUS INDICATORS

1. SYNC PRESENT (GREEN)
2. VIDEO PRESENT (GREEN)/OVERLOAD (RED)

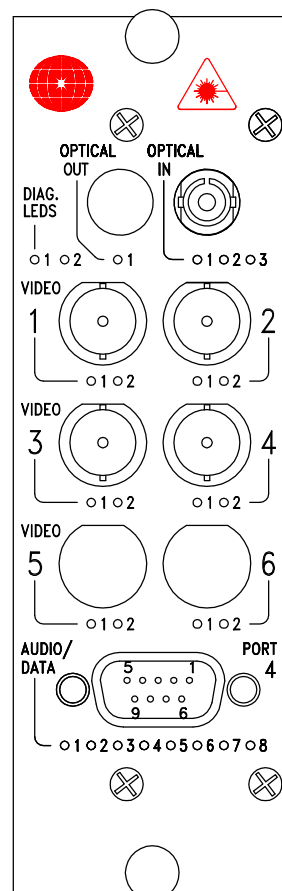

OPTICAL PORT

STATUS INDICATORS

1. NA
2. RX OPTICAL SIGNAL (GREEN)/ABSENT (RED)
3. RX CARRIER (GREEN)/ERROR (RED)

VIDEO OUTPUT (CH.2)

STATUS INDICATORS

1. SYNC PRESENT (GREEN)
2. VIDEO PRESENT (GREEN)/OVERLOAD (RED)

VIDEO OUTPUT (CH.4)

STATUS INDICATORS

1. SYNC PRESENT (GREEN)
2. VIDEO PRESENT (GREEN)/OVERLOAD (RED)

STATUS INDICATORS (PORT 4)

1. (CH.1) DATA INPUT
2. NA
3. (CH.1) DATA OUTPUT
4. NA
5. NA
6. NA
7. NA
8. NA

MULTI PROTOCOL DIGITAL(PORT 4) PINOUT DIAGRAM

PIN #	RS-232	RS-422	RS-485 2W	RS-485 4W
1		CH1 IN+	CH1 IN/OUT+	CH1 IN+
2	CH1 OUT (TD)			
3	CH1 IN (RD)			
4		CH1 IN-	CH1 IN/OUT-	CH1 IN-
5	GND	GND	GND	GND
6		CH1 OUT+		CH1 OUT+
7	NA			
8	NA			
9		CH1 OUT-		CH1 OUT-

INTERNAL JUMPER SETTINGS

1 *	2	3	4
RS-232	RS-422	RS-485 2W	RS-485 4W

* FACTORY SETTINGS