


# ST-1W1A1G/1G-X

## PINOUT DIAGRAM

### STATUS INDICATORS

PWR - POWER (GREEN)  
 DIAG - NA  
 TX C/L - TX CARRIER (GREEN)  
 /OVERLOAD (RED)  
 RX C/E - RX CARRIER  
 (GREEN)/ERROR (RED)  
 SYN - SYNC PRESENT (GREEN)  
 VID - VIDEO PRESENT  
 (GREEN)/ OVERLOAD (RED)

DR1 - NA  
 DR2 - NA  
 AR1 - (CH.1) AUDIO OUTPUT  
 AR2 - NA  
 CR1 - NA  
 CR2 - NA  
 DT1 - (CH.1) DATA INPUT  
 DT2 - NA  
 AT1 - (CH.1) AUDIO INPUT  
 AT2 - NA  
 CT1 - NA  
 CT2 - NA

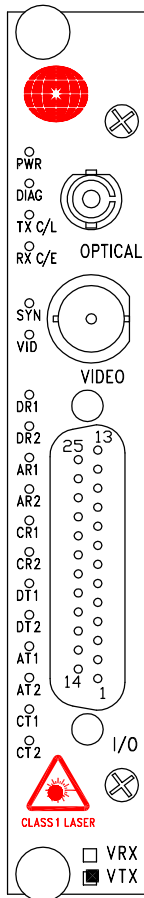

OPTICAL PORT (ST, FC)

VIDEO INPUT

AUDIO/DATA INPUT/OUTPUT  
 (DB-25 FEMALE)

22. (CH.1) AUDIO INPUT-  
 10. (CH.1) AUDIO INPUT+  
 4. (CH.1) RS232 INPUT / (CH.1) RS422 INPUT- / RS485 INPUT-  
 16. (CH.1) RS422 INPUT+ / RS485 INPUT+  
 5. (CH.1) RS232 OUTPUT / (CH.1) RS422 OUTPUT- / RS485 OUTPUT-  
 17. (CH.1) RS422 OUTPUT+ / RS485 OUTPUT+  
 1. GND  
 7. GND


# SR-1W1A1G/1G-X

## PINOUT DIAGRAM

### STATUS INDICATORS

PWR - POWER (GREEN)  
 DIAG - NA  
 TX C/L - TX CARRIER (GREEN)  
 /OVERLOAD (RED)  
 RX C/E - RX CARRIER  
 (GREEN)/ERROR (RED)  
 SYN - SYNC PRESENT (GREEN)  
 VID - VIDEO PRESENT  
 (GREEN)/ OVERLOAD (RED)

DR1 - (CH.1) DATA OUTPUT  
 DR2 - NA  
 AR1 - (CH.1) AUDIO OUTPUT  
 AR2 - NA  
 CR1 - NA  
 CR2 - NA  
 DT1 - NA  
 DT2 - NA  
 AT1 - (CH.1) AUDIO INPUT  
 AT2 - NA  
 CT1 - NA  
 CT2 - NA

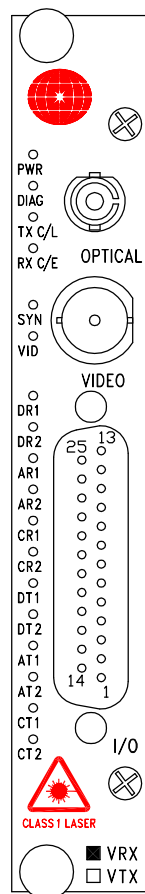

OPTICAL PORT (ST, FC)

VIDEO OUTPUT

AUDIO/DATA INPUT/OUTPUT  
 (DB-25 FEMALE)

12. (CH.1) AUDIO OUTPUT-  
 24. (CH.1) AUDIO OUTPUT+  
 4. (CH.1) RS232 INPUT / (CH.1) RS422 INPUT- / RS485 INPUT-  
 16. (CH.1) RS422 INPUT+ / RS485 INPUT+  
 5. (CH.1) RS232 OUTPUT / (CH.1) RS422 OUTPUT- / RS485 OUTPUT-  
 17. (CH.1) RS422 OUTPUT+ / RS485 OUTPUT+  
 1. GND  
 7. GND