


ST-1W2C1G/1G-X

PINOUT DIAGRAM

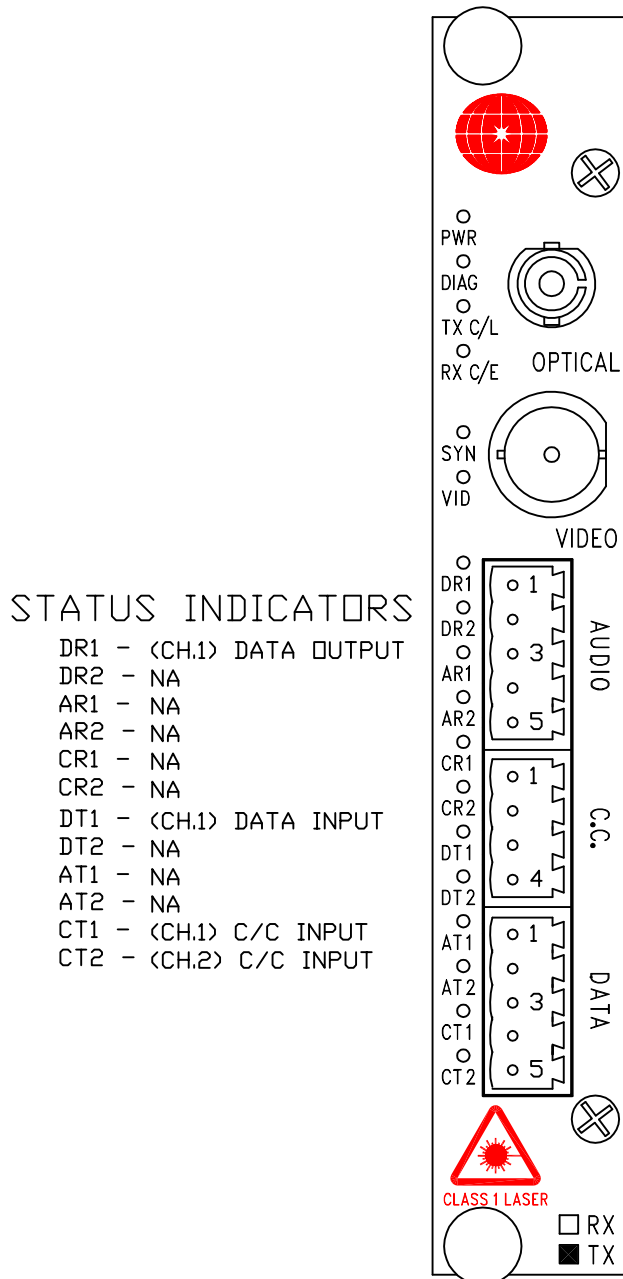

OPTICAL PORT (ST, FC)

STATUS INDICATORS

PWR - POWER (GREEN)

DIAG - NA

TX C/L - TX CARRIER (GREEN) / OVERLOAD (RED)

RX C/E - RX CARRIER (GREEN) / ERROR (RED)

VIDEO INPUT

STATUS INDICATORS

SYN - SYNC PRESENT (GREEN)

VID - VIDEO PRESENT (GREEN) / OVERLOAD (RED)

AUDIO N/A

CC INPUT

1. <CH.1> CC INPUT

2. <CH.1> GND

3. <CH.2> CC INPUT


4. <CH.2> GND

DATA MULTI PROTOCOL DIGITAL PINOUT DIAGRAM

PIN #	RS-232	RS-422	RS-485 2W	RS-485 4W
1	CH1 IN (RD)	CH1 IN-	CH1 IN/OUT-	CH1 IN-
2		CH1 IN+	CH1 IN/OUT+	CH1 IN+
3	CH1 OUT (TD)	CH1 OUT-		CH1 OUT-
4		CH1 OUT+		CH1 OUT+
5	GND	GND	GND	GND

SR-1W2C1G/1G-X

PINOUT DIAGRAM

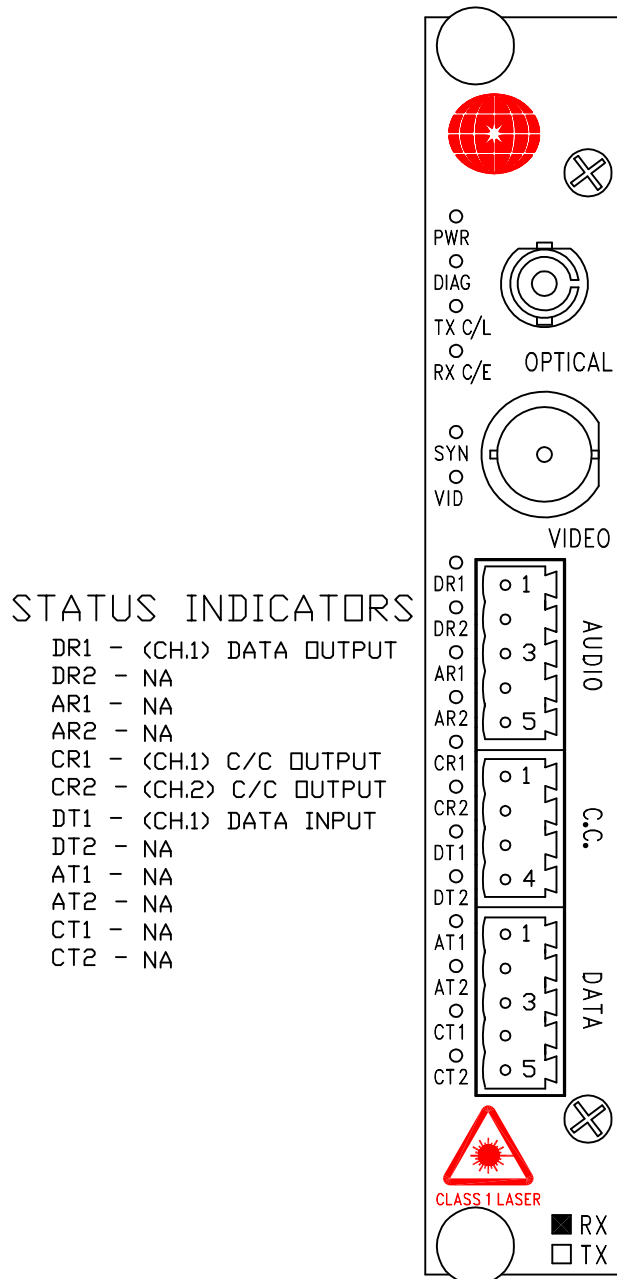

STATUS INDICATORS

DR1 - (CH.1) DATA OUTPUT
DR2 - NA
AR1 - NA
AR2 - NA
CR1 - (CH.1) C/C OUTPUT
CR2 - (CH.2) C/C OUTPUT
DT1 - (CH.1) DATA INPUT
DT2 - NA
AT1 - NA
AT2 - NA
CT1 - NA
CT2 - NA

OPTICAL PORT (ST, FC)

STATUS INDICATORS

PWR - POWER (GREEN)
DIAG - NA
TX C/L - TX CARRIER (GREEN) / OVERLOAD (RED)
RX C/E - RX CARRIER (GREEN) / ERROR (RED)

VIDEO OUTPUT

STATUS INDICATORS

SYN - SYNC PRESENT (GREEN)
VID - VIDEO PRESENT (GREEN) / OVERLOAD (RED)

AUDIO N/A

CC OUTPUT

1. (CH.1) CC OUTPUT-
2. (CH.1) CC OUTPUT+
3. (CH.2) CC OUTPUT-
4. (CH.2) CC OUTPUT+

DATA MULTI PROTOCOL DIGITAL PINOUT DIAGRAM

PIN #	RS-232	RS-422	RS-485 2W	RS-485 4W
1	CH1 IN (RD)	CH1 IN-	CH1 IN/OUT-	CH1 IN-
2		CH1 IN+	CH1 IN/OUT+	CH1 IN+
3	CH1 OUT (TD)	CH1 OUT-		CH1 OUT-
4		CH1 OUT+		CH1 OUT+
5	GND	GND	GND	GND