


ST-2A1G/1G-X

PINOUT DIAGRAM

STATUS INDICATORS

DR1 - (CH.1) DATA OUTPUT
DR2 - NA
AR1 - NA
AR2 - NA
CR1 - NA
CR2 - NA
DT1 - (CH.1) DATA INPUT
DT2 - NA
AT1 - (CH.1) AUDIO INPUT
AT2 - (CH.2) AUDIO INPUT
CT1 - NA
CT2 - NA

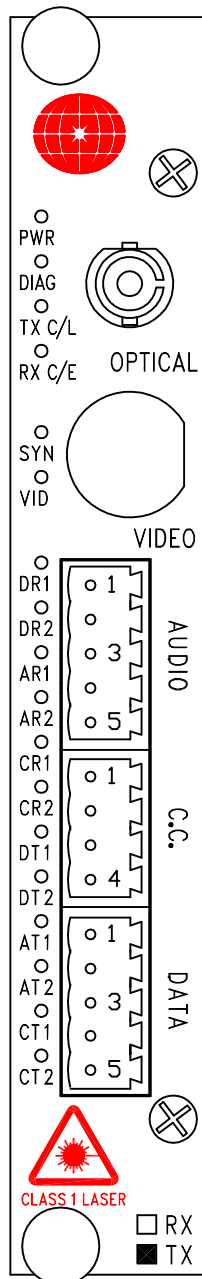

OPTICAL PORT (ST, FC)

STATUS INDICATORS

PWR - POWER (GREEN)
DIAG - NA
TX C/L - TX CARRIER (GREEN) / OVERLOAD (RED)
RX C/E - RX CARRIER (GREEN) / ERROR (RED)
SYN - NA
VID - NA

AUDIO INPUT

1. (CH.1) AUDIO INPUT-
2. (CH.1) AUDIO INPUT+
3. (CH.2) AUDIO INPUT-
4. (CH.2) AUDIO INPUT+
5. GND

DATA MULTI PROTOCOL DIGITAL PINOUT DIAGRAM


PIN #	RS-232	RS-422	RS-485 2W	RS-485 4W
1	CH1 IN (RD)	CH1 IN-	CH1 IN/OUT-	CH1 IN-
2		CH1 IN+	CH1 IN/OUT+	CH1 IN+
3	CH1 OUT (TD)	CH1 OUT-		CH1 OUT-
4		CH1 OUT+		CH1 OUT+
5	GND	GND	GND	GND

SR-2A1G/1G-X

PINOUT DIAGRAM

STATUS INDICATORS

DR1 - (CH.1) DATA OUTPUT
DR2 - NA
AR1 - (CH.1) AUDIO OUTPUT
AR2 - (CH.2) AUDIO OUTPUT
CR1 - NA
CR2 - NA
DT1 - (CH.1) DATA INPUT
DT2 - NA
AT1 - NA
AT2 - NA
CT1 - NA
CT2 - NA

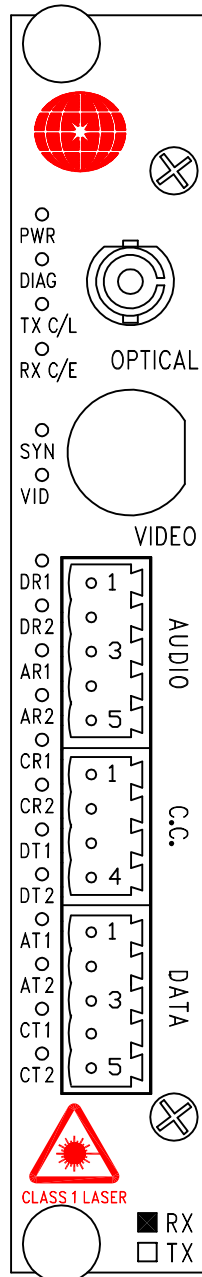

OPTICAL PORT (ST, FC)

STATUS INDICATORS

PWR - POWER (GREEN)

DIAG - NA

TX C/L - TX CARRIER (GREEN) / OVERLOAD (RED)

RX C/E - RX CARRIER (GREEN) / ERROR (RED)

SYN - NA

VID - NA

AUDIO OUTPUT

1. (CH.1) AUDIO OUTPUT-
2. (CH.1) AUDIO OUTPUT+
3. (CH.2) AUDIO OUTPUT-
4. (CH.2) AUDIO OUTPUT+
5. GND

DATA MULTI PROTOCOL DIGITAL PINOUT DIAGRAM

PIN #	RS-232	RS-422	RS-485 2W	RS-485 4W
1	CH1 IN (RD)	CH1 IN-	CH1 IN/OUT-	CH1 IN-
2		CH1 IN+	CH1 IN/OUT+	CH1 IN+
3	CH1 OUT (TD)	CH1 OUT-		CH1 OUT-
4		CH1 OUT+		CH1 OUT+
5	GND	GND	GND	GND