

Operating and Installation Instructions

Universal Frame SR-1002/SF

DESCRIPTION

The SR-1002/SF are two (2) slot wall mountable desk chassis with mounting flanges. This chassis have two (2) "edge card" connectors that accepts all Meridian Technologies' card units.

POWER SUPPLY

The SR-1002/SF is powered by an internal, **isolated circuit**, switching power supply.


The units accept:

1. from 12VDC (1200mA) to 24VDC (600mA)
2. from 12VAC (1200mA) to 24VAC (600mA)

Power Supply WP-24 (110V/220V) is included.

INSTALLATION

The chassis must be installed on a vertical surface to allow maximum ventilation top to bottom of the card units. There are four mounting holes for hardware # 8 (maximum). Two knurled captive screws mount the card in each slot. Power is distributed by a mother PCB in the rear of unit.

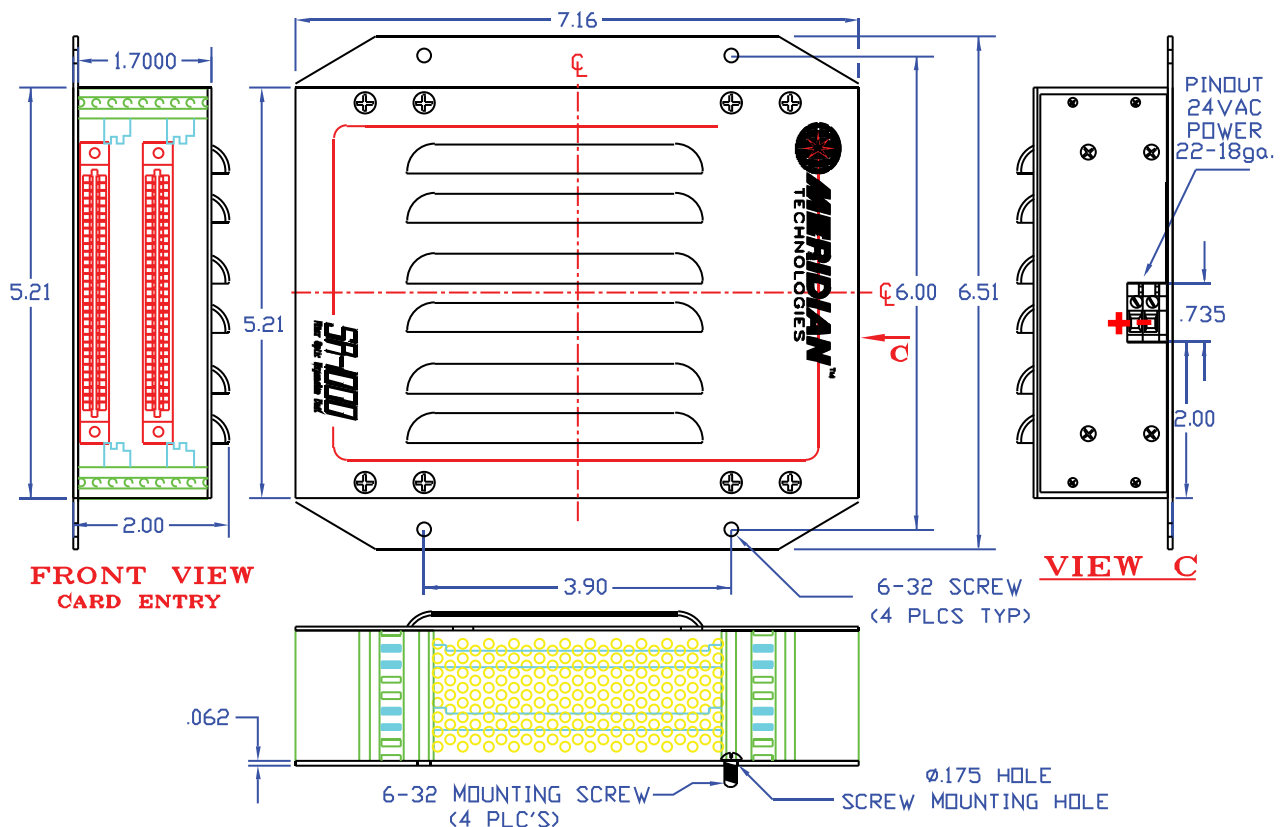

Power Options:

1. from 12VDC (1200mA) to 24VDC (600mA)
2. from 12VAC (1200mA) to 24VAC (600mA)