

SX-2A2C2G/2A2C2G-X


PINOUT DIAGRAM

STATUS INDICATORS

PWR - POWER (GREEN)
 DIAG - NA
 TX C/L - TX CARRIER (GREEN)
 /OVERLOAD (RED)
 RX C/E - RX CARRIER (GREEN)
 /ERROR (RED)

SYN - NA
 VID - NA

DR1 - (CH.1) DATA OUTPUT
 DR2 - (CH.2) DATA OUTPUT
 AR1 - (CH.1) AUDIO OUTPUT
 AR2 - (CH.2) AUDIO OUTPUT
 CR1 - (CH.1) C/C OUTPUT
 CR2 - (CH.2) C/C OUTPUT
 DT1 - (CH.1) DATA INPUT
 DT2 - (CH.2) DATA INPUT
 AT1 - (CH.1) AUDIO INPUT
 AT2 - (CH.2) AUDIO INPUT
 CT1 - (CH.1) C/C INPUT
 CT2 - (CH.2) C/C INPUT

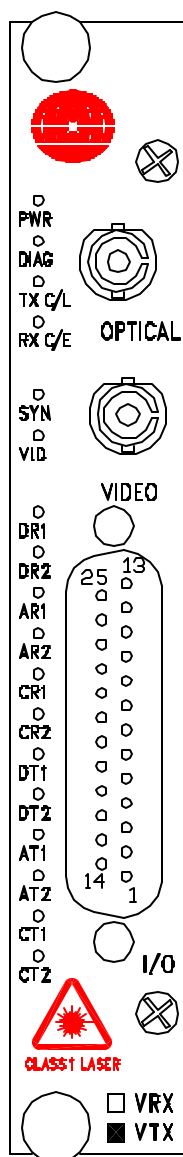

OPTICAL PORT IN (ST, FC)

OPTICAL PORT OUT (ST, FC)

AUDIO/DATA INPUT/OUTPUT
 (DB-25 FEMALE)

22. (CH.1) AUDIO INPUT-
 10. (CH.1) AUDIO INPUT+
 12. (CH.1) AUDIO OUTPUT-
 24. (CH.1) AUDIO OUTPUT+
 23. (CH.2) AUDIO INPUT-
 11. (CH.2) AUDIO INPUT+
 13. (CH.2) AUDIO OUTPUT-
 25. (CH.2) AUDIO OUTPUT+
 6. (CH.1) CC INPUT
 20. (CH.1) CC OUTPUT-
 8. (CH.1) CC OUTPUT+
 18. (CH.2) CC INPUT
 21. (CH.2) CC OUTPUT-
 9. (CH.2) CC OUTPUT+
 4. (CH.1) RS232 INPUT / RS422 INPUT- / RS485 (4W) INPUT-
 / (CH.1) RS485 (2W) INPUT/OUTPUT-
 16. (CH.1) RS422 INPUT+ / RS485 (4W) INPUT+
 / (CH.1) RS485 (2W) INPUT/OUTPUT+
 2. (CH.2) RS232 INPUT / RS422 INPUT-
 14. (CH.2) RS422 INPUT+
 5. (CH.1) RS232 OUTPUT / RS422 OUTPUT- / RS485 OUTPUT-(4W)
 / (CH.2) RS485 (2W) INPUT/OUTPUT-
 17. (CH.1) RS422 OUTPUT+ / RS485 OUTPUT+(4W)
 / (CH.2) RS485 (2W) INPUT/OUTPUT+
 3. (CH.2) RS232 OUTPUT / RS422 OUTPUT-
 15. (CH.2) RS422 OUTPUT+
 19. +5V
 1. GND
 7. GND