


SXA-1A1G/1A1G-X

PINOUT DIAGRAM

STATUS INDICATORS

PWR - POWER (GREEN)
 DIAG - NA
 TX C/L - TX CARRIER (GREEN)
 /OVERLOAD (RED)
 RX C/E - RX CARRIER
 (GREEN)/ERROR (RED)
 SYN - NA
 VID - NA

DR1 - (CH.1) DATA OUTPUT
 DR2 - NA
 AR1 - (CH.1) AUDIO OUTPUT
 AR2 - NA
 CR1 - NA
 CR2 - NA
 DT1 - (CH.1) DATA INPUT
 DT2 - NA
 AT1 - (CH.1) AUDIO INPUT
 AT2 - NA
 CT1 - NA
 CT2 - NA

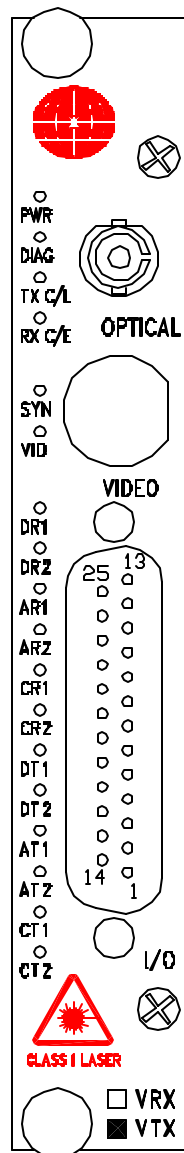

OPTICAL PORT (ST, FC)

AUDIO/DATA INPUT/OUTPUT
 (DB-25 FEMALE)

- 22. (CH.1) AUDIO INPUT-
- 10. (CH.1) AUDIO INPUT+
- 12. (CH.1) AUDIO OUTPUT-
- 24. (CH.1) AUDIO OUTPUT+
- 4. (CH.1) RS232 INPUT / (CH.1) RS422 INPUT- / RS485 INPUT-
- 16. (CH.1) RS422 INPUT+ / RS485 INPUT+
- 5. (CH.1) RS232 OUTPUT / (CH.1) RS422 OUTPUT- / RS485 OUTPUT-
- 17. (CH.1) RS422 OUTPUT+ / RS485 OUTPUT+
- 1. GND
- 7. GND


SXB-1A1G/1A1G-X

PINOUT DIAGRAM

STATUS INDICATORS

PWR - POWER (GREEN)
 DIAG - NA
 TX C/L - TX CARRIER (GREEN)
 /OVERLOAD (RED)
 RX C/E - RX CARRIER
 (GREEN)/ERROR (RED)
 SYN - SYNC PRESENT (GREEN)
 VID - VIDEO PRESENT
 (GREEN)/ OVERLOAD (RED)

DR1 - (CH.1) DATA OUTPUT
 DR2 - NA
 AR1 - (CH.1) AUDIO OUTPUT
 AR2 - NA
 CR1 - NA
 CR2 - NA
 DT1 - (CH.1) DATA INPUT
 DT2 - NA
 AT1 - (CH.1) AUDIO INPUT
 AT2 - NA
 CT1 - NA
 CT2 - NA

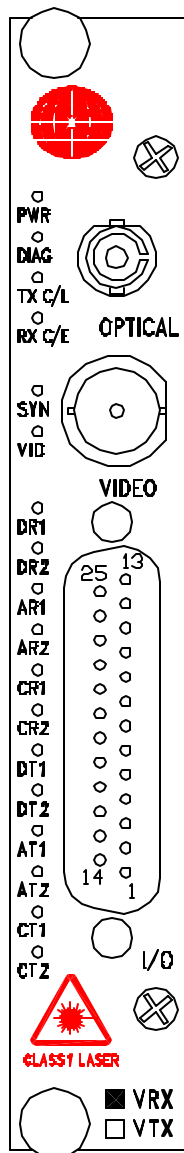

OPTICAL PORT (ST, FC)

VIDEO OUTPUT

AUDIO/DATA INPUT/OUTPUT
 (DB-25 FEMALE)

22. (CH.1) AUDIO INPUT-
 10. (CH.1) AUDIO INPUT+
 12. (CH.1) AUDIO OUTPUT-
 24. (CH.1) AUDIO OUTPUT+
 4. (CH.1) RS232 INPUT / (CH.1) RS422 INPUT- / RS485 INPUT-
 16. (CH.1) RS422 INPUT+ / RS485 INPUT+
 5. (CH.1) RS232 OUTPUT / (CH.1) RS422 OUTPUT- / RS485 OUTPUT-
 17. (CH.1) RS422 OUTPUT+ / RS485 OUTPUT+
 1. GND
 7. GND