


SXA / SXB-2G / 2G-XS

(LASCOMM CONFIGURATION)

PINOUT DIAGRAM

STATUS INDICATORS

DR1 -	(CH.1) DATA OUTPUT
DR2 -	(CH.2) DATA OUTPUT
AR1 -	NA
AR2 -	NA
CR1 -	NA
CR2 -	NA
DT1 -	(CH.1) DATA INPUT
DT2 -	(CH.2) DATA INPUT
AT1 -	NA
AT2 -	NA
CT1 -	NA
CT2 -	NA

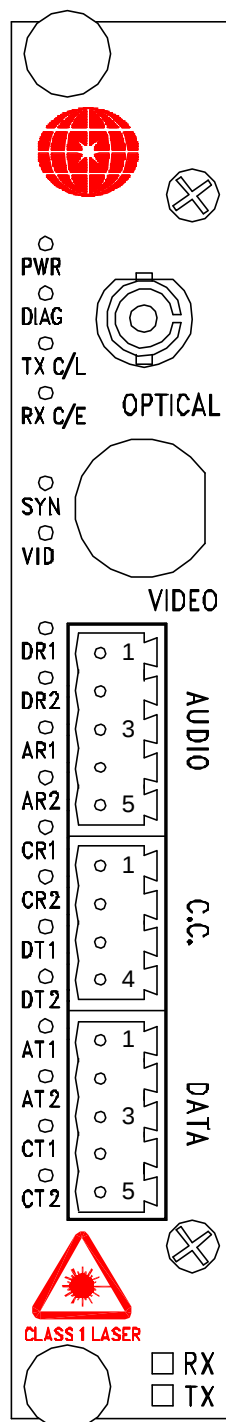

OPTICAL PORT (ST, FC)

STATUS INDICATORS

PWR - POWER (GREEN)

DIAG - NA

TX C/L - TX CARRIER (GREEN) / OVERLOAD (RED)

RX C/E - RX CARRIER (GREEN) / ERROR (RED)

SYN - NA

VID - NA

AUDIO / DATA INPUT / OUTPUT

1. (CH.2) RS422 INPUT- / RS232 INPUT / RS485 (2W) INPUT/OUTPUT-
2. (CH.2) RS422 INPUT+ / RS232 INPUT / RS485 (2W) INPUT/OUTPUT+
3. (CH.2) RS422 OUTPUT- / RS232 OUTPUT
4. (CH.2) RS422 OUTPUT+
5. GND

CC N/A

DATA INPUT / OUTPUT

1. (CH.1) RS232 INPUT / RS422 INPUT- / RS485 (4W) INPUT- / RS485 (2W) INPUT/OUTPUT-
2. (CH.1) RS422 INPUT+ / RS485 (4W) INPUT+ / RS485 (2W) INPUT/OUTPUT+
3. (CH.1) RS232 OUTPUT / RS422 OUTPUT- / RS485 (4W) OUTPUT-
4. (CH.1) RS422 OUTPUT+ / RS485 (4W) OUTPUT+
5. GND