

DT-16F-X

PINOUT DIAGRAM

OPTICAL PORT

STATUS INDICATORS

1. POWER (GREEN)
2. NA

STATUS INDICATORS

1. TX CARRIER (GREEN)/ERROR (RED)

DATA RS422 IN (PORT 1) (DB-9 FEMALE)

1. (CH.1) INPUT
2. (CH.1) INPUT
3. (CH.2) INPUT
4. (CH.2) INPUT
5. GND
6. (CH.3) INPUT
7. (CH.3) INPUT
8. (CH.4) INPUT
9. (CH.4) INPUT

DATA RS422 IN (PORT 2) (DB-9 FEMALE)


1. (CH.5) INPUT
2. (CH.5) INPUT
3. (CH.6) INPUT
4. (CH.6) INPUT
5. GND
6. (CH.7) INPUT
7. (CH.7) INPUT
8. (CH.8) INPUT
9. (CH.8) INPUT

DATA RS422 IN (PORT 3) (DB-9 FEMALE)

1. (CH.9) INPUT
2. (CH.9) INPUT
3. (CH.10) INPUT
4. (CH.10) INPUT
5. GND
6. (CH.11) INPUT
7. (CH.11) INPUT
8. (CH.12) INPUT
9. (CH.12) INPUT

DATA RS422 IN (PORT 4) (DB-9 FEMALE)

1. (CH.13) INPUT
2. (CH.13) INPUT
3. (CH.14) INPUT
4. (CH.14) INPUT
5. GND
6. (CH.15) INPUT
7. (CH.15) INPUT
8. (CH.16) INPUT
9. (CH.16) INPUT

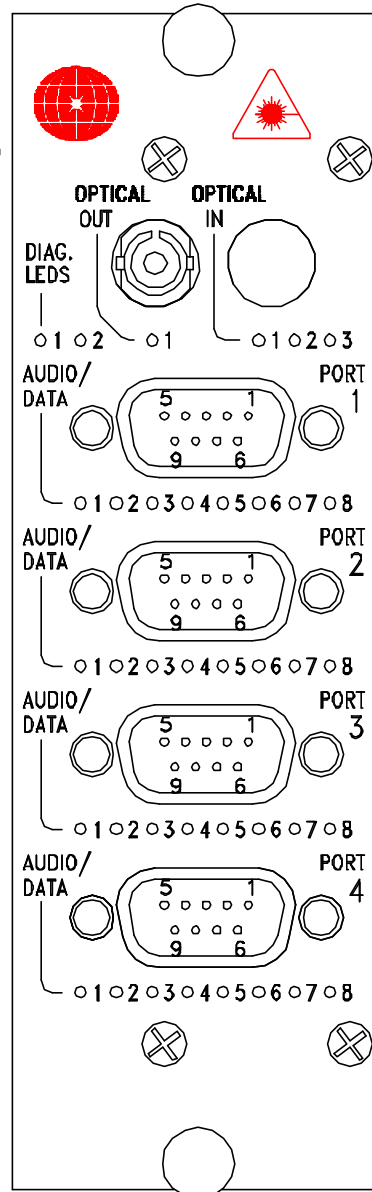

STATUS INDICATORS (PORT 1)

1. (CH.1) DATA INPUT
2. (CH.1) DATA INPUT
3. (CH.2) DATA INPUT
4. (CH.2) DATA INPUT
5. (CH.3) DATA INPUT
6. (CH.3) DATA INPUT
7. (CH.4) DATA INPUT
8. (CH.4) DATA INPUT

STATUS INDICATORS (PORT 2)

1. (CH.5) DATA INPUT
2. (CH.5) DATA INPUT
3. (CH.6) DATA INPUT
4. (CH.6) DATA INPUT
5. (CH.7) DATA INPUT
6. (CH.7) DATA INPUT
7. (CH.8) DATA INPUT
8. (CH.8) DATA INPUT

STATUS INDICATORS (PORT 3)

1. (CH.9) DATA INPUT
2. (CH.9) DATA INPUT
3. (CH.10) DATA INPUT
4. (CH.10) DATA INPUT
5. (CH.11) DATA INPUT
6. (CH.11) DATA INPUT
7. (CH.12) DATA INPUT
8. (CH.12) DATA INPUT

STATUS INDICATORS (PORT 4)

1. (CH.13) DATA INPUT
2. (CH.13) DATA INPUT
3. (CH.14) DATA INPUT
4. (CH.14) DATA INPUT
5. (CH.15) DATA INPUT
6. (CH.15) DATA INPUT
7. (CH.16) DATA INPUT
8. (CH.16) DATA INPUT

DR-16F-X

PINOUT DIAGRAM

STATUS INDICATORS

1. POWER (GREEN)
2. NA

DATA RS422 OUT (PORT 1) (DB-9 FEMALE)

1. (CH.1) OUTPUT
2. (CH.1) OUTPUT
3. (CH.2) OUTPUT
4. (CH.2) OUTPUT
5. GND
6. (CH.3) OUTPUT
7. (CH.3) OUTPUT
8. (CH.4) OUTPUT
9. (CH.4) OUTPUT

DATA RS422 OUT (PORT 2) (DB-9 FEMALE)


1. (CH.5) OUTPUT
2. (CH.5) OUTPUT
3. (CH.6) OUTPUT
4. (CH.6) OUTPUT
5. GND
6. (CH.7) OUTPUT
7. (CH.7) OUTPUT
8. (CH.8) OUTPUT
9. (CH.8) OUTPUT

DATA RS422 OUT (PORT 3) (DB-9 FEMALE)

1. (CH.9) OUTPUT
2. (CH.9) OUTPUT
3. (CH.10) OUTPUT
4. (CH.10) OUTPUT
5. GND
6. (CH.11) OUTPUT
7. (CH.11) OUTPUT
8. (CH.12) OUTPUT
9. (CH.12) OUTPUT

DATA RS422 OUT (PORT 4) (DB-9 FEMALE)

1. (CH.13) OUTPUT
2. (CH.13) OUTPUT
3. (CH.14) OUTPUT
4. (CH.14) OUTPUT
5. GND
6. (CH.15) OUTPUT
7. (CH.15) OUTPUT
8. (CH.16) OUTPUT
9. (CH.16) OUTPUT

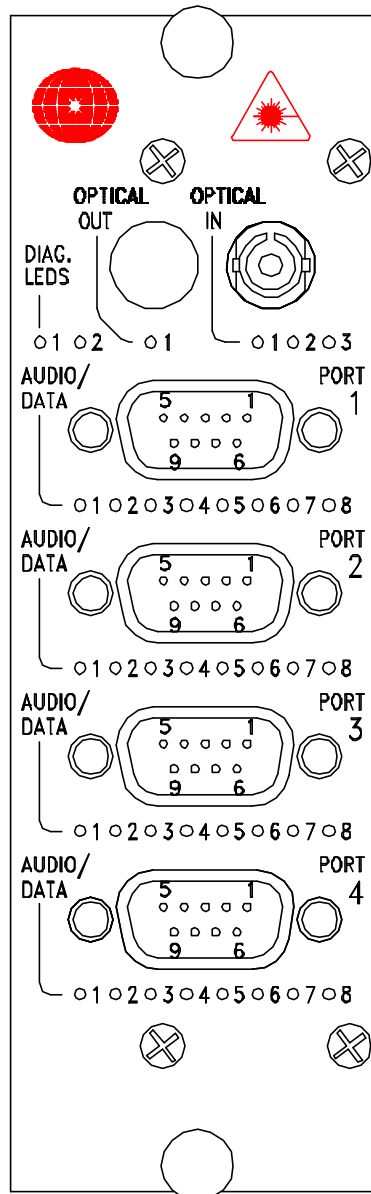

OPTICAL PORT

STATUS INDICATORS

1. RX OPTICAL SIGNAL (GREEN)/ABSENT (RED)
2. NA
3. RX CARRIER (GREEN)/ERROR (RED)

STATUS INDICATORS (PORT 1)

1. (CH.1) DATA OUTPUT
2. (CH.1) DATA OUTPUT
3. (CH.2) DATA OUTPUT
4. (CH.2) DATA OUTPUT
5. (CH.3) DATA OUTPUT
6. (CH.3) DATA OUTPUT
7. (CH.4) DATA OUTPUT
8. (CH.4) DATA OUTPUT

STATUS INDICATORS (PORT 2)

1. (CH.5) DATA OUTPUT
2. (CH.5) DATA OUTPUT
3. (CH.6) DATA OUTPUT
4. (CH.6) DATA OUTPUT
5. (CH.7) DATA OUTPUT
6. (CH.7) DATA OUTPUT
7. (CH.8) DATA OUTPUT
8. (CH.8) DATA OUTPUT

STATUS INDICATORS (PORT 3)

1. (CH.9) DATA OUTPUT
2. (CH.9) DATA OUTPUT
3. (CH.10) DATA OUTPUT
4. (CH.10) DATA OUTPUT
5. (CH.11) DATA OUTPUT
6. (CH.11) DATA OUTPUT
7. (CH.12) DATA OUTPUT
8. (CH.12) DATA OUTPUT

STATUS INDICATORS (PORT 4)

1. (CH.13) DATA OUTPUT
2. (CH.13) DATA OUTPUT
3. (CH.14) DATA OUTPUT
4. (CH.14) DATA OUTPUT
5. (CH.15) DATA OUTPUT
6. (CH.15) DATA OUTPUT
7. (CH.16) DATA OUTPUT
8. (CH.16) DATA OUTPUT