

DT-1S1D/1D-X

PINOUT DIAGRAM

STATUS INDICATORS

1. POWER (GREEN)
2. NA

STATUS INDICATORS

1. TX CARRIER (GREEN)/ERROR (RED)


S-VIDEO INPUT

STATUS INDICATORS

1. SYNC PRESENT (GREEN)
2. VIDEO PRESENT (GREEN)/OVERLOAD (RED)

DATA RS232 IN/OUT(PORT 4) (DB-9 FEMALE)

1. NA
2. (CH.1) OUTPUT (TD)
3. (CH.1) INPUT (RD)
4. NA
5. GND
6. NA
7. NA
8. NA
9. NA

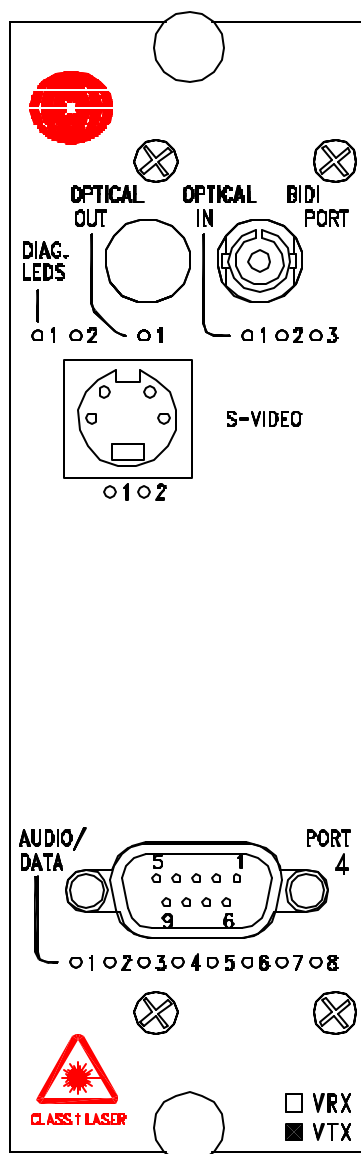

OPTICAL PORT

STATUS INDICATORS

1. NA
2. RX OPTICAL SIGNAL (GREEN)/ABSENT (RED)
3. RX CARRIER (GREEN)/ERROR (RED)

STATUS INDICATORS PORT (4)

1. (CH.1) DATA INPUT
2. (CH.1) DATA OUTPUT
3. NA
4. NA
5. NA
6. NA
7. NA
8. NA

MERIDIAN TECHNOLOGIES INC.
700 ELMONT ROAD, ELMONT, N.Y. 11003
Support: 516-285-1000,
919-847-6638, 858-605-1070
WWW.MERIDIAN-TECH.COM

FILE NAME: DTDR-1S1D-1D.DWG

10/08/2009 V.0

DR-1S1D/1D-X

PINOUT DIAGRAM

STATUS INDICATORS

1. POWER (GREEN)
2. NA


STATUS INDICATORS

1. TX CARRIER (GREEN)/ERROR (RED)

S-VIDEO OUTPUT

STATUS INDICATORS

1. SYNC PRESENT (GREEN)
2. VIDEO PRESENT (GREEN)/OVERLOAD (RED)

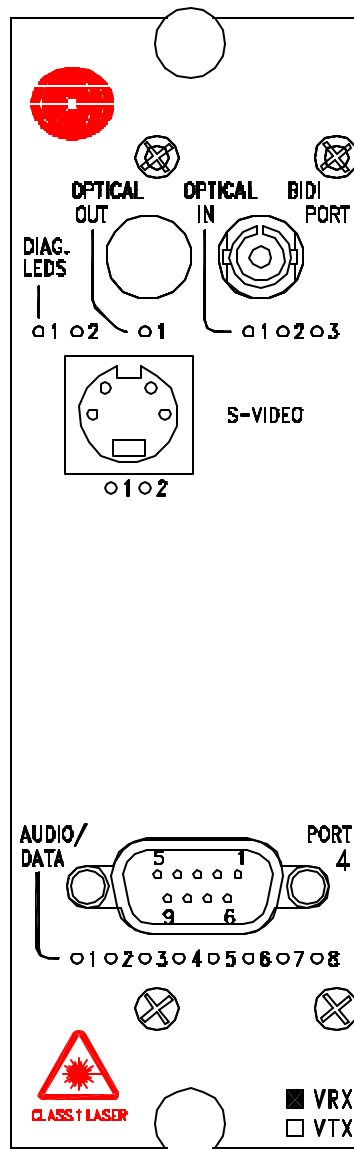

OPTICAL PORT STATUS INDICATORS

1. NA
2. RX OPTICAL SIGNAL (GREEN)/ABSENT (RED)
3. RX CARRIER (GREEN)/ERROR (RED)

DATA RS232 IN/OUT(PORT 4) (DB-9 FEMALE)

1. NA
2. (CH.1) OUTPUT (TD)
3. (CH.1) INPUT (RD)
4. NA
5. GND
6. NA
7. NA
8. NA
9. NA

STATUS INDICATORS PORT (4)

1. (CH.1) DATA INPUT
2. (CH.1) DATA OUTPUT
3. NA
4. NA
5. NA
6. NA
7. NA
8. NA