

DT-1V(W)1A/1P1A-X

PINOUT DIAGRAM

STATUS INDICATORS

1. POWER (GREEN)
2. NA

STATUS INDICATORS

1. TX CARRIER (GREEN)/ERROR (RED)

VIDEO IN/DATA OUT (CH.1)


STATUS INDICATORS

1. SYNC PRESENT (GREEN)
2. VIDEO PRESENT (GREEN)/OVERLOAD (RED)

AUDIO INPUT/OUTPUT (PORT 4)

(DB-9 FEMALE)

1. (CH.1) OUTPUT-
2. (CH.1) OUTPUT+
3. (CH.2) NA
4. (CH.2) NA
5. GND
6. (CH.1) INPUT-
7. (CH.1) INPUT+
8. (CH.2) NA
9. (CH.2) NA

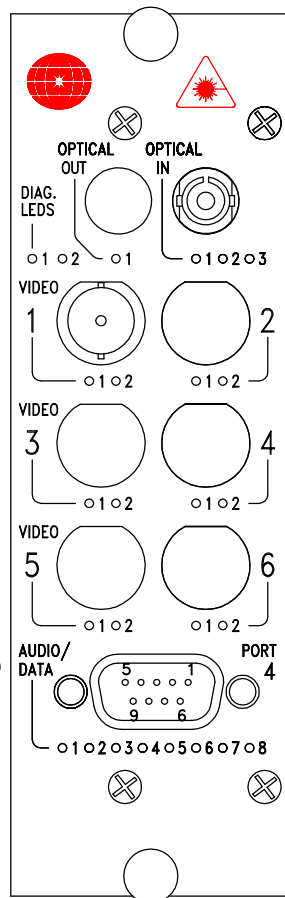

OPTICAL PORT

STATUS INDICATORS

1. NA
2. RX OPTICAL SIGNAL (GREEN)/ABSENT (RED)
3. RX CARRIER (GREEN)/ERROR (RED)

1. DATA PRESENT
2. VD2 PRESENT

STATUS INDICATORS (PORT 4)

1. (CH.1) AUDIO INPUT PRESENT
2. (CH.1) AUDIO INPUT OVERLOAD
3. (CH.2) NA
4. (CH.2) NA
5. (CH.1) AUDIO OUTPUT PRESENT
6. (CH.1) AUDIO OUTPUT OVERLOAD
7. (CH.2) NA
8. (CH.2) NA

*V-8 BIT VIDEO
*W-10 BIT VIDEO

DR-1V(W)1A/1P1A-X

PINOUT DIAGRAM

STATUS INDICATORS

1. POWER (GREEN)
2. NA


STATUS INDICATORS

1. TX CARRIER (GREEN)/ERROR (RED)

VIDEO OUT/DATA IN (CH.1)

STATUS INDICATORS

1. SYNC PRESENT (GREEN)
2. VIDEO PRESENT (GREEN)/OVERLOAD (RED)

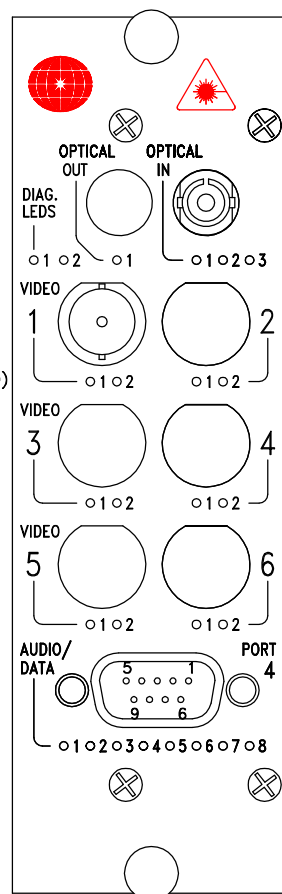

OPTICAL PORT STATUS INDICATORS

1. NA
2. RX OPTICAL SIGNAL (GREEN)/ABSENT (RED)
3. RX CARRIER (GREEN)/ERROR (RED)

1. DATA PRESENT
2. VD2 PRESENT

AUDIO INPUT/OUTPUT (PORT 4) (DB-9 FEMALE)

1. (CH.1) OUTPUT-
2. (CH.1) OUTPUT+
3. (CH.2) NA
4. (CH.2) NA
5. GND
6. (CH.1) INPUT-
7. (CH.1) INPUT+
8. (CH.2) NA
9. (CH.2) NA

STATUS INDICATORS (PORT 4)

1. (CH.1) AUDIO INPUT PRESENT
2. (CH.1) AUDIO INPUT OVERLOAD
3. (CH.2) NA
4. (CH.2) NA
5. (CH.1) AUDIO OUTPUT PRESENT
6. (CH.1) AUDIO OUTPUT OVERLOAD
7. (CH.2) NA
8. (CH.2) NA

*V-8 BIT VIDEO
*W-10 BIT VIDEO