

DT-1V(W)1D-X

PINOUT DIAGRAM

OPTICAL PORT

STATUS INDICATORS

1. POWER (GREEN)
2. NA


STATUS INDICATORS

1. TX CARRIER (GREEN)/ERROR (RED)

VIDEO INPUT (CH.1)

STATUS INDICATORS

1. SYNC PRESENT (GREEN)
2. VIDEO PRESENT (GREEN)/OVERLOAD (RED)

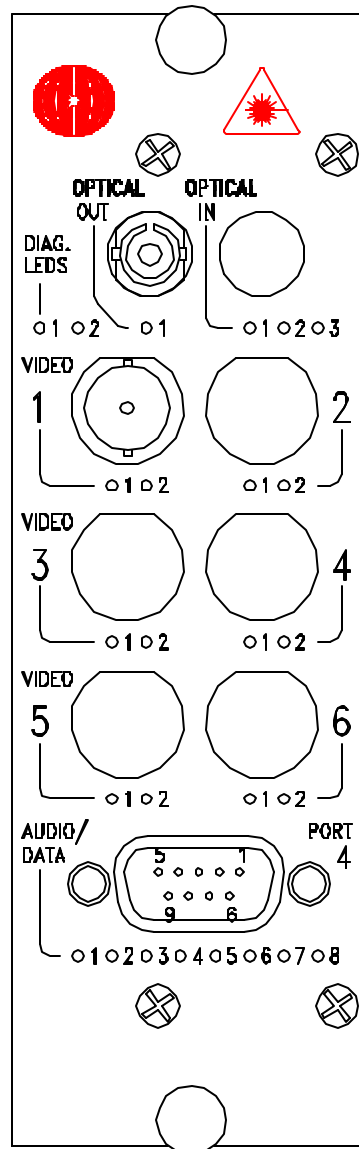

DATA RS232 IN/OUT(PORT 4) (DB-9 FEMALE)

1. NA
2. NA
3. (CH.1) INPUT (RD)
4. NA
5. GND
6. NA
7. NA
8. NA
9. NA

STATUS INDICATORS PORT (4)

1. (CH.1) DATA INPUT
2. NA
3. NA
4. NA
5. NA
6. NA
7. NA
8. NA

DR-1V(W)1D-X

PINOUT DIAGRAM

STATUS INDICATORS

1. POWER (GREEN)
2. NA


STATUS INDICATORS

1. NA

VIDEO OUTPUT (CH.1)

STATUS INDICATORS

1. SYNC PRESENT (GREEN)
2. VIDEO PRESENT (GREEN)/OVERLOAD (RED)

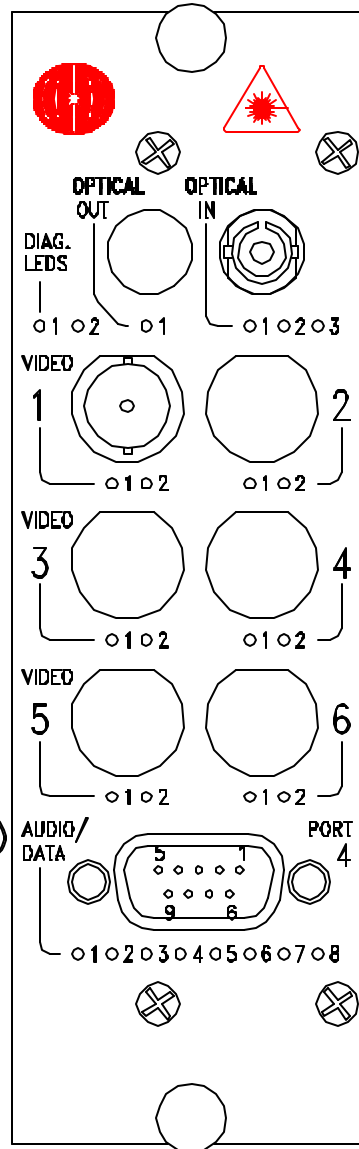

OPTICAL PORT

STATUS INDICATORS

1. NA
2. RX OPTICAL SIGNAL (GREEN)/ABSENT (RED)
3. RX CARRIER (GREEN)/ERROR (RED)

STATUS INDICATORS

1. RX OPTICAL SIGNAL (GREEN)/ABSENT (RED)
2. NA
3. RX CARRIER (GREEN)/ERROR (RED)

DATA RS232 IN/OUT (PORT 4) (DB-9 FEMALE)

1. NA
2. (CH.1) OUTPUT (TD)
3. NA
4. NA
5. GND
6. NA
7. NA
8. NA
9. NA

STATUS INDICATORS (PORT 4)

1. NA
2. (CH.1) DATA OUTPUT
3. NA
4. NA
5. NA
6. NA
7. NA
8. NA