

DT-2A2D1HQ/1D1F1Q-XS (2 FIBER)

PINOUT DIAGRAM

OPTICAL PORT (ST)

STATUS INDICATORS

PWR - POWER (GREEN)
 DIAG - NA
 TX L - TX LASER ERROR (RED)
 RX OS - RX OPTICAL SIGNAL (GREEN)
 RX C - RX LINK (GREEN)

USB DEVICE (PORT 1) (TYPE A)

STATUS INDICATORS

OC -OVER CURRENT (RED)
 DE -PORT ENABLE (GREEN)

USB DEVICE (PORT 2) (TYPE A)

STATUS INDICATORS

OC -OVER CURRENT (RED)
 DE -PORT ENABLE (GREEN)

USB DEVICE (PORT 3) (TYPE A)


STATUS INDICATORS

OC -OVER CURRENT (RED)
 DE -PORT ENABLE (GREEN)

USB DEVICE (PORT 4) (TYPE A)

STATUS INDICATORS

OC -OVER CURRENT (RED)
 DE -PORT ENABLE (GREEN)

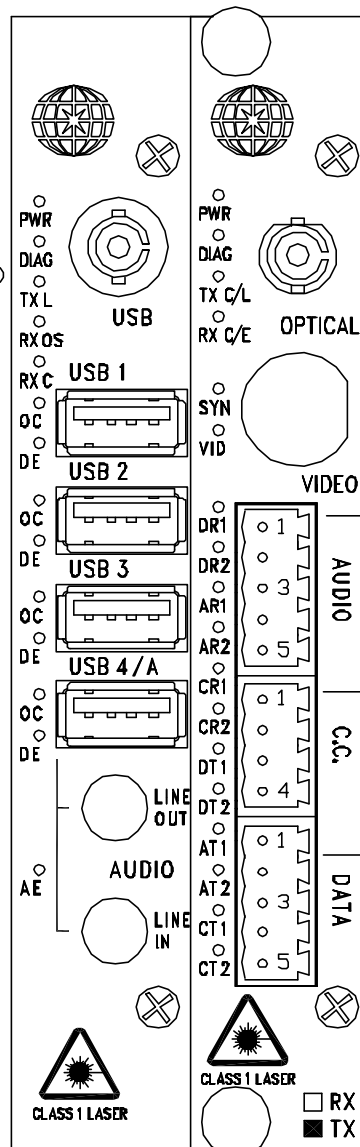

OPTICAL PORT (ST, FC)

STATUS INDICATORS

PWR - POWER (GREEN)
 DIAG - NA
 TX C/L - TX CARRIER (GREEN) / OVERLOAD (RED)
 RX C/E - RX CARRIER (GREEN) / ERROR (RED)
 SYN - NA
 VID - NA

AUDIO OUTPUT

1. (CH.1) AUDIO INPUT-
2. (CH.1) AUDIO INPUT+
3. (CH.2) AUDIO INPUT-
4. (CH.2) AUDIO INPUT+
5. GND

RS-232 DATA IN/OUT

1. (CH.1) RS232 DATA INPUT (RD)
2. (CH.1) RS232 DATA OUTPUT (TD)
3. (CH.2) RS232 DATA INPUT (RD)
4. GND

RS-422 DATA INPUT

1. NA
2. NA
3. (CH.2) RS422 DATA OUTPUT-
4. (CH.2) RS422 DATA OUTPUT+
5. GND

STATUS INDICATORS

DR1 - (CH.1) DATA OUTPUT
 DR2 - (CH.2) DATA OUTPUT
 AR1 - NA
 AR2 - NA
 CR1 - NA
 CR2 - NA
 DT1 - (CH.1) DATA INPUT
 DT2 - (CH.2) DATA INPUT
 AT1 - (CH.1) AUDIO INPUT
 AT2 - (CH.2) AUDIO INPUT
 CT1 - NA
 CT2 - NA

DR-2A2D1HQ/1D1F1Q-XS (2 FIBER)

OPTICAL PORT (ST)

STATUS INDICATORS

PWR - POWER (GREEN)
 DIAG - NA
 TX L - TX LASER ERROR (RED)
 RX OS - RX OPTICAL SIGNAL (GREEN)
 RX C - RX LINK (GREEN)


STATUS INDICATORS

DR1 - (CH.1) DATA OUTPUT
 DR2 - (CH.2) DATA OUTPUT
 AR1 - (CH.1) AUDIO OUTPUT
 AR2 - (CH.2) AUDIO OUTPUT
 CR1 - NA
 CR2 - NA
 DT1 - (CH.1) DATA INPUT
 DT2 - (CH.2) DATA INPUT
 AT1 - NA
 AT2 - NA
 CT1 - NA
 CT2 - NA

USB PC (TYPE B)

STATUS INDICATOR

USB -PORT ENABLE (GREEN)

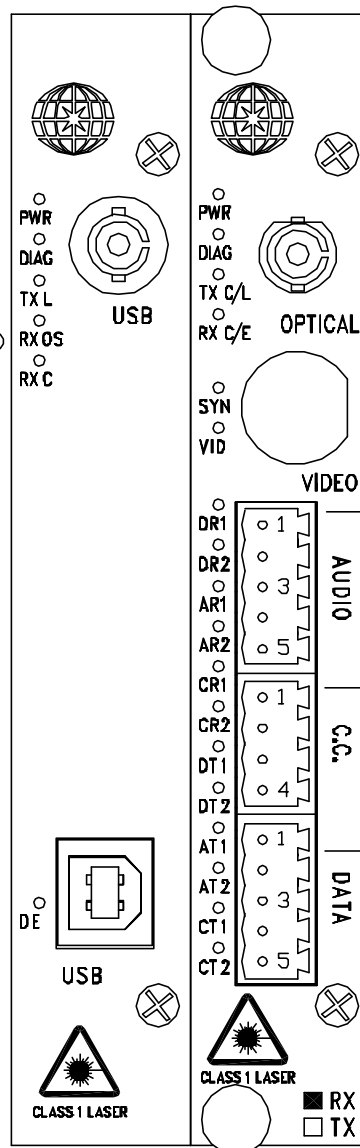

OPTICAL PORT (ST, FC)

STATUS INDICATORS

PWR - POWER (GREEN)
 DIAG - NA
 TX C/L - TX CARRIER (GREEN) / OVERLOAD (RED)
 RX C/E - RX CARRIER (GREEN) / ERROR (RED)
 SYN - NA
 VID - NA

AUDIO OUTPUT

1. (CH.1) AUDIO OUTPUT-
2. (CH.1) AUDIO OUTPUT+
3. (CH.2) AUDIO OUTPUT-
4. (CH.2) AUDIO OUTPUT+
5. GND

RS-232 DATA IN/OUT

1. (CH.1) RS232 DATA INPUT (RD)
2. (CH.1) RS232 DATA OUTPUT (TD)
3. (CH.2) RS232 DATA OUTPUT (TD)
4. GND

RS-422 DATA INPUT

1. NA
2. NA
3. (CH.2) RS422 DATA INPUT -
4. (CH.2) RS422 DATA INPUT+
5. GND