

DT-2V1A4C1D/1A4C1D-X

PINOUT DIAGRAM

STATUS INDICATORS

1. POWER (GREEN)
2. NA

STATUS INDICATORS

1. TX CARRIER (GREEN)/ERROR (RED)

VIDEO INPUT (CH.1)

STATUS INDICATORS

1. SYNC PRESENT (GREEN)
 2. VIDEO PRESENT (GREEN)/OVERLOAD (RED)
- ### AUDIO IN/OUT (PORT 2)

(DB-9 FEMALE)

1. (CH.1) OUTPUT-
2. (CH.1) OUTPUT+
3. NA
4. NA
5. GND
6. (CH.1) INPUT-
7. (CH.1) INPUT+
8. NA
9. NA

DATA IN/OUT (PORT 3)


(DB-15 FEMALE)

1. (CH.1) INPUT
2. (CH.2) INPUT
3. (CH.3) INPUT
4. (CH.4) INPUT
5. GND
6. (CH.1) OUTPUT
7. (CH.1) OUTPUT
8. (CH.2) OUTPUT
9. (CH.2) OUTPUT
10. (CH.3) OUTPUT
11. (CH.3) OUTPUT
12. (CH.4) OUTPUT
13. (CH.4) OUTPUT
14. NA
15. NA

DATA RS232 IN/OUT (PORT 4)

(DB-9 FEMALE)

1. NA
2. (CH.1) OUTPUT (TD)
3. (CH.1) INPUT (RD)
4. NA
5. GND
6. NA
7. NA
8. NA
9. NA

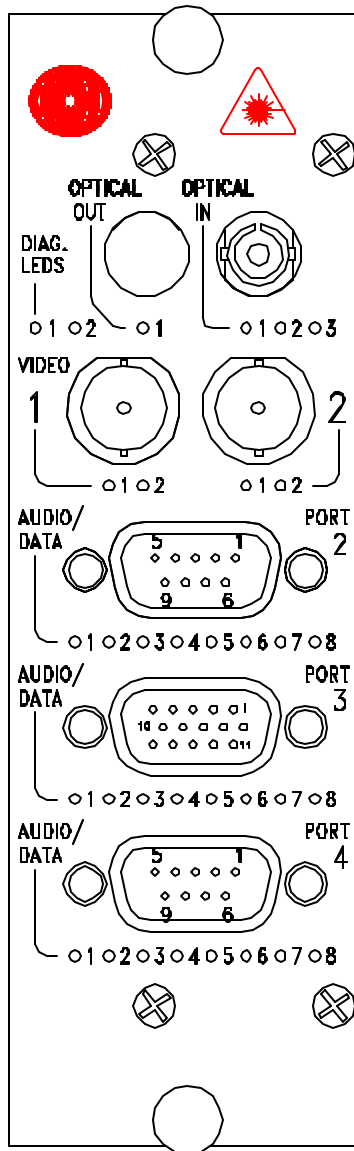

OPTICAL PORT STATUS INDICATORS

1. NA
2. RX OPTICAL SIGNAL (GREEN)/ABSENT (RED)
3. RX CARRIER (GREEN)/ERROR (RED)

VIDEO INPUT (CH.2)

STATUS INDICATORS

1. SYNC PRESENT (GREEN)
2. VIDEO PRESENT (GREEN)/OVERLOAD (RED)

STATUS INDICATORS (PORT 2)

1. (CH.1) AUDIO INPUT PRESENT
2. (CH.1) AUDIO INPUT OVERLOAD
3. NA
4. NA
5. (CH.1) AUDIO OUTPUT PRESENT
6. (CH.1) AUDIO OUTPUT OVERLOAD
7. NA
8. NA

STATUS INDICATORS (PORT 3)

1. (CH.1) INPUT PRESENT
2. (CH.1) OUTPUT PRESENT
3. (CH.2) INPUT PRESENT
4. (CH.2) OUTPUT PRESENT
5. (CH.3) INPUT PRESENT
6. (CH.3) OUTPUT PRESENT
7. (CH.4) INPUT PRESENT
8. (CH.4) OUTPUT PRESENT

STATUS INDICATORS (PORT 4)

1. (CH.1) DATA INPUT
2. (CH.1) DATA OUTPUT
3. NA
4. NA
5. NA
6. NA
7. NA
8. NA

DR-2V1A4C1D/1A4C1D-X

PINOUT DIAGRAM

STATUS INDICATORS

1. POWER (GREEN)
2. NA

STATUS INDICATORS

1. TX CARRIER (GREEN)/ERROR (RED)

VIDEO OUTPUT (CH.1)

STATUS INDICATORS

1. SYNC PRESENT (GREEN)
2. VIDEO PRESENT (GREEN)/OVERLOAD (RED)

AUDIO IN/OUT (PORT 2)

(DB-9 FEMALE)

1. (CH.1) OUTPUT-
2. (CH.1) OUTPUT+
3. NA
4. NA
5. GND
6. (CH.1) INPUT-
7. (CH.1) INPUT+
8. NA
9. NA

DATA IN/OUT (PORT 3)


(DB-15 FEMALE)

1. (CH.1) INPUT
2. (CH.2) INPUT
3. (CH.3) INPUT
4. (CH.4) INPUT
5. GND
6. (CH.1) OUTPUT
7. (CH.1) OUTPUT
8. (CH.2) OUTPUT
9. (CH.2) OUTPUT
10. (CH.3) OUTPUT
11. (CH.3) OUTPUT
12. (CH.4) OUTPUT
13. (CH.4) OUTPUT
14. NA
15. NA

DATA RS232 IN/OUT (PORT 4)

(DB-9 FEMALE)

1. NA
2. (CH.1) OUTPUT (TD)
3. (CH.1) INPUT (RD)
4. NA
5. GND
6. NA
7. NA
8. NA
9. NA

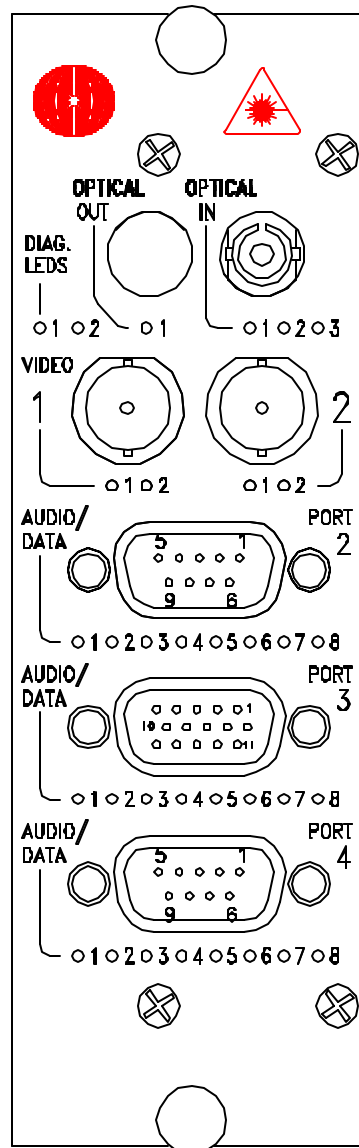

OPTICAL PORT

STATUS INDICATORS

1. NA
2. RX OPTICAL SIGNAL (GREEN)/ABSENT (RED)
3. RX CARRIER (GREEN)/ERROR (RED)

VIDEO OUTPUT (CH.2)

STATUS INDICATORS

1. SYNC PRESENT (GREEN)
2. VIDEO PRESENT (GREEN)/OVERLOAD (RED)

STATUS INDICATORS (PORT 2)

1. (CH.1) AUDIO INPUT PRESENT
2. (CH.1) AUDIO INPUT OVERLOAD
3. NA
4. NA
5. (CH.1) AUDIO OUTPUT PRESENT
6. (CH.1) AUDIO OUTPUT OVERLOAD
7. NA
8. NA

STATUS INDICATORS (PORT 3)

1. (CH.1) INPUT PRESENT
2. (CH.1) OUTPUT PRESENT
3. (CH.2) INPUT PRESENT
4. (CH.2) OUTPUT PRESENT
5. (CH.3) INPUT PRESENT
6. (CH.3) OUTPUT PRESENT
7. (CH.4) INPUT PRESENT
8. (CH.4) OUTPUT PRESENT

STATUS INDICATORS (PORT 4)

1. (CH.1) DATA INPUT
2. (CH.1) DATA OUTPUT
3. NA
4. NA
5. NA
6. NA
7. NA
8. NA