

PINOUT DIAGRAM

DT-2V2AB8D/2AB8D-SFP

STATUS INDICATORS

1. POWER (GREEN)
2. CARD DIAGNOSTIC (GREEN-OK, RED-ALARM)

VIDEO INPUT (CH.1)

STATUS INDICATORS

1. SYNC PRESENT (GREEN)
2. VIDEO PRESENT (GREEN)/OVERLOAD (RED)

AUDIO IN/OUT (PORT 2) (DB-9 FEMALE)


1. (CH.1) NA
2. (CH.1) OUTPUT
3. (CH.2) NA
4. (CH.2) OUTPUT
5. GND
6. (CH.1) GND
7. (CH.1) INPUT
8. (CH.2) GND
9. (CH.2) INPUT

DATA RS232 IN/OUT (PORT 3) (DB-9 FEMALE)

1. (CH.4) INPUT (CD)
2. (CH.1) OUTPUT (TD)
3. (CH.1) INPUT (RD)
4. (CH.2) INPUT (DTR)
5. GND
6. (CH.2) OUTPUT (DSR)
7. (CH.3) INPUT (RTS)
8. (CH.3) OUTPUT (CTS)
9. (CH.4) OUTPUT (RI)

DATA RS232 IN/OUT (PORT 4) (DB-9 FEMALE)

1. (CH.8) INPUT (CD)
2. (CH.5) OUTPUT (TD)
3. (CH.5) INPUT (RD)
4. (CH.6) INPUT (DTR)
5. GND
6. (CH.6) OUTPUT (DSR)
7. (CH.7) INPUT (RTS)
8. (CH.7) OUTPUT (CTS)
9. (CH.8) OUTPUT (RI)

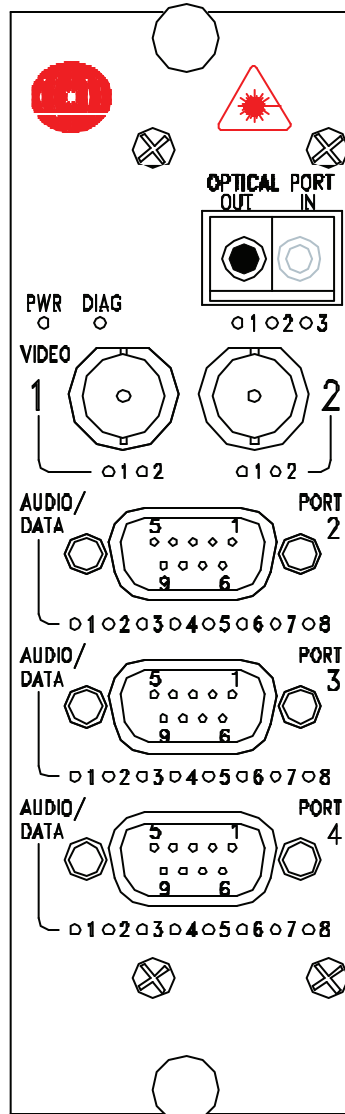

SFP OPTICAL PORT STATUS INDICATORS

1. TX CARRIER (GREEN)/ERROR (RED)
2. NA
3. NA

VIDEO INPUT (CH.2)

STATUS INDICATORS

1. SYNC PRESENT (GREEN)
2. VIDEO PRESENT (GREEN)/OVERLOAD (RED)

STATUS INDICATORS (PORT 2)

1. (CH.1) AUDIO INPUT PRESENT
2. (CH.1) AUDIO INPUT OVERLOAD
3. (CH.2) AUDIO INPUT PRESENT
4. (CH.2) AUDIO INPUT OVERLOAD
5. (CH.1) AUDIO OUTPUT PRESENT
6. (CH.1) AUDIO OUTPUT OVERLOAD
7. (CH.2) AUDIO OUTPUT PRESENT
8. (CH.2) AUDIO OUTPUT OVERLOAD

STATUS INDICATORS (PORT 3)

1. (CH.1) DATA INPUT
2. (CH.1) DATA OUTPUT
3. (CH.2) DATA INPUT
4. (CH.2) DATA OUTPUT
5. (CH.3) DATA INPUT
6. (CH.3) DATA OUTPUT
7. (CH.4) DATA INPUT
8. (CH.4) DATA OUTPUT

STATUS INDICATORS (PORT 4)

1. (CH.5) DATA INPUT
2. (CH.5) DATA OUTPUT
3. (CH.6) DATA INPUT
4. (CH.6) DATA OUTPUT
5. (CH.7) DATA INPUT
6. (CH.7) DATA OUTPUT
7. (CH.8) DATA INPUT
8. (CH.8) DATA OUTPUT

PINOUT DIAGRAM

DR-2V2AB8D/2AB8D-SFP

STATUS INDICATORS

1. POWER (GREEN)
2. CARD DIAGNOSTIC (GREEN-OK, RED-ALARM)

VIDEO OUTPUT (CH.1)

STATUS INDICATORS

1. SYNC PRESENT (GREEN)
2. VIDEO PRESENT (GREEN)/OVERLOAD (RED)

AUDIO IN/OUT (PORT 2)

(DB-9 FEMALE)

1. (CH.1) NA
2. (CH.1) OUTPUT
3. (CH.2) NA
4. (CH.2) OUTPUT
5. GND
6. (CH.1) GND
7. (CH.1) INPUT
8. (CH.2) GND
9. (CH.2) INPUT

DATA RS232 IN/OUT (PORT 3)


(DB-9 FEMALE)

1. (CH.4) INPUT (CD)
2. (CH.1) OUTPUT (TD)
3. (CH.1) INPUT (RD)
4. (CH.2) INPUT (DTR)
5. GND
6. (CH.2) OUTPUT (DSR)
7. (CH.3) INPUT (RTS)
8. (CH.3) OUTPUT (CTS)
9. (CH.4) OUTPUT (RI)

DATA RS232 IN/OUT (PORT 4)

(DB-9 FEMALE)

1. (CH.8) INPUT (CD)
2. (CH.5) OUTPUT (TD)
3. (CH.5) INPUT (RD)
4. (CH.6) INPUT (DTR)
5. GND
6. (CH.6) OUTPUT (DSR)
7. (CH.7) INPUT (RTS)
8. (CH.7) OUTPUT (CTS)
9. (CH.8) OUTPUT (PI)

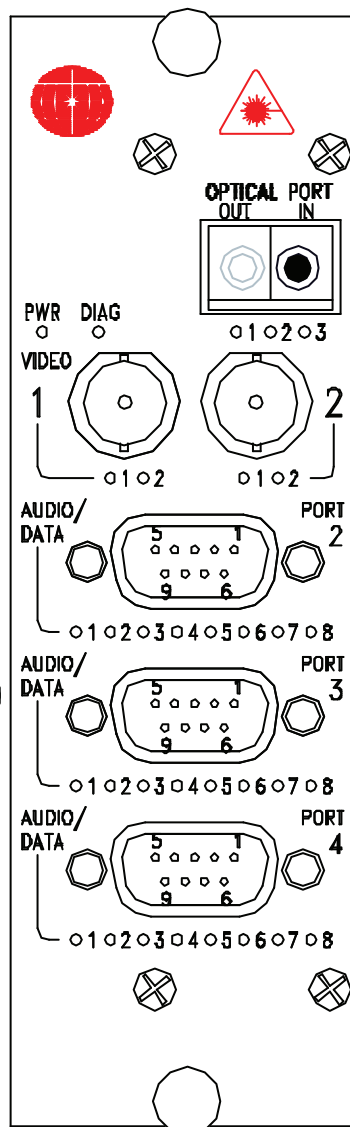

SFP OPTICAL PORT

STATUS INDICATORS

1. NA
2. RX OPTICAL SIGNAL (GREEN)/ABSENT (RED)
3. RX CARRIER (GREEN)/ERROR (RED)

VIDEO OUTPUT (CH.2)

STATUS INDICATORS

1. SYNC PRESENT (GREEN)
2. VIDEO PRESENT (GREEN)/OVERLOAD (RED)

STATUS INDICATORS (PORT 2)

1. (CH.1) AUDIO INPUT PRESENT
2. (CH.1) AUDIO INPUT OVERLOAD
3. (CH.2) AUDIO INPUT PRESENT
4. (CH.2) AUDIO INPUT OVERLOAD
5. (CH.1) AUDIO OUTPUT PRESENT
6. (CH.1) AUDIO OUTPUT OVERLOAD
7. (CH.2) AUDIO OUTPUT PRESENT
8. (CH.2) AUDIO OUTPUT OVERLOAD

STATUS INDICATORS (PORT 3)

1. (CH.1) DATA INPUT
2. (CH.1) DATA OUTPUT
3. (CH.2) DATA INPUT
4. (CH.2) DATA OUTPUT
5. (CH.3) DATA INPUT
6. (CH.3) DATA OUTPUT
7. (CH.4) DATA INPUT
8. (CH.4) DATA OUTPUT

STATUS INDICATORS (PORT 4)

1. (CH.5) DATA INPUT
2. (CH.5) DATA OUTPUT
3. (CH.6) DATA INPUT
4. (CH.6) DATA OUTPUT
5. (CH.7) DATA INPUT
6. (CH.7) DATA OUTPUT
7. (CH.8) DATA INPUT
8. (CH.8) DATA OUTPUT