

DT-2V(W)4D/4D-X

PINOUT DIAGRAM

STATUS INDICATORS

1. POWER (GREEN)
2. NA

STATUS INDICATORS

1. TX CARRIER (GREEN)/ERROR (RED)

VIDEO INPUT (CH.1)

STATUS INDICATORS

1. SYNC PRESENT (GREEN)
2. VIDEO PRESENT (GREEN)/OVERLOAD (RED)

OPTICAL PORT

STATUS INDICATORS

1. NA
2. RX OPTICAL SIGNAL (GREEN)/ABSENT (RED)
3. RX CARRIER (GREEN)/ERROR (RED)


VIDEO INPUT (CH.2)

STATUS INDICATORS

1. SYNC PRESENT (GREEN)
2. VIDEO PRESENT (GREEN)/OVERLOAD (RED)

DATA RS232 IN/OUT (PORT 4) (DB-9 FEMALE)

1. (CH.4) INPUT (CD)
2. (CH.1) OUTPUT (TD)
3. (CH.1) INPUT (RD)
4. (CH.2) INPUT (DTR)
5. GND
6. (CH.2) OUTPUT (DSR)
7. (CH.3) INPUT (RTS)
8. (CH.3) OUTPUT (CTS)
9. (CH.4) OUTPUT (RI)

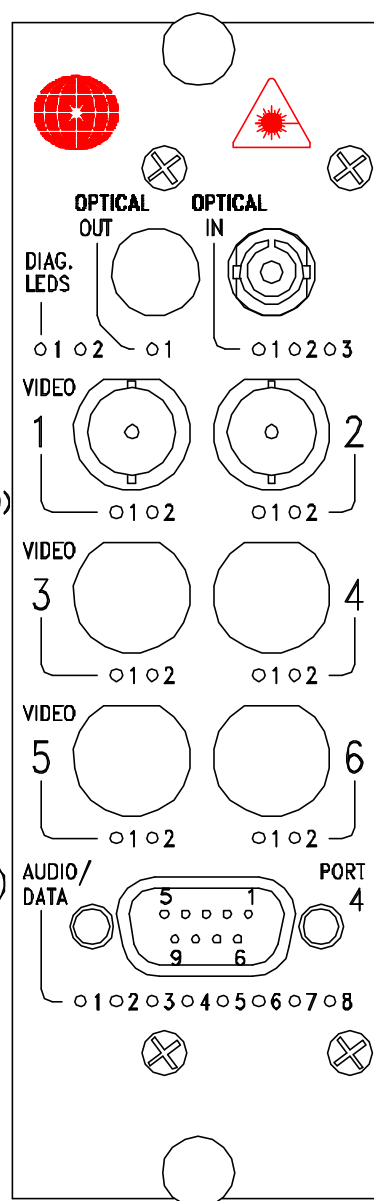

STATUS INDICATORS (PORT 4)

1. (CH.1) DATA INPUT
2. (CH.1) DATA OUTPUT
3. (CH.2) DATA INPUT
4. (CH.2) DATA OUTPUT
5. (CH.3) DATA INPUT
6. (CH.3) DATA OUTPUT
7. (CH.4) DATA INPUT
8. (CH.4) DATA OUTPUT

DR-2V(W)4D/4D-X

PINOUT DIAGRAM

STATUS INDICATORS

1. POWER (GREEN)
2. NA


STATUS INDICATORS

1. TX CARRIER (GREEN)/ERROR (RED)

VIDEO OUTPUT (CH.1)

STATUS INDICATORS

1. SYNC PRESENT (GREEN)
2. VIDEO PRESENT (GREEN)/OVERLOAD (RED)

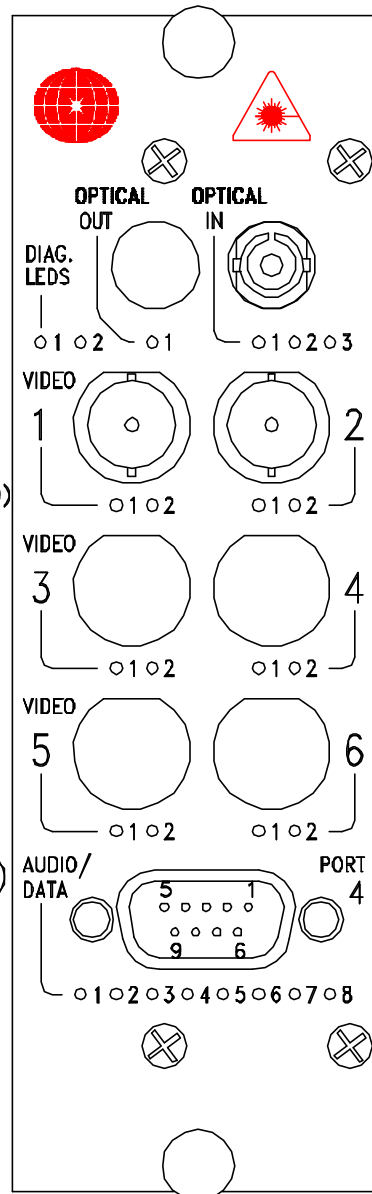

DATA RS232 IN/OUT (PORT 4) (DB-9 FEMALE)

1. (CH.4) INPUT (CD)
2. (CH.1) OUTPUT (TD)
3. (CH.1) INPUT (RD)
4. (CH.2) INPUT (DTR)
5. GND
6. (CH.2) OUTPUT (DSR)
7. (CH.3) INPUT (RTS)
8. (CH.3) OUTPUT (CTS)
9. (CH.4) OUTPUT (RI)

OPTICAL PORT

STATUS INDICATORS

1. NA
2. RX OPTICAL SIGNAL (GREEN)/ABSENT (RED)
3. RX CARRIER (GREEN)/ERROR (RED)

VIDEO OUTPUT (CH.2)

STATUS INDICATORS

1. SYNC PRESENT (GREEN)
2. VIDEO PRESENT (GREEN)/OVERLOAD (RED)

STATUS INDICATORS (PORT 4)

1. (CH.1) DATA INPUT
2. (CH.1) DATA OUTPUT
3. (CH.2) DATA INPUT
4. (CH.2) DATA OUTPUT
5. (CH.3) DATA INPUT
6. (CH.3) DATA OUTPUT
7. (CH.4) DATA INPUT
8. (CH.4) DATA OUTPUT