


DT-4S-X

PINOUT DIAGRAM

- OPTICAL PORT
- STATUS INDICATORS
1. POWER (GREEN)
 2. NA
- STATUS INDICATORS
1. TX CARRIER (GREEN)/ERROR (RED)
- S-VIDEO INPUT (CH.1)
- STATUS INDICATORS
1. SYNC PRESENT (GREEN)
 2. VIDEO PRESENT (GREEN)/OVERLOAD (RED)
- S-VIDEO INPUT (CH.2)
- STATUS INDICATORS
1. SYNC PRESENT (GREEN)
 2. VIDEO PRESENT (GREEN)/OVERLOAD (RED)
- S-VIDEO INPUT (CH.3)
- STATUS INDICATORS
1. SYNC PRESENT (GREEN)
 2. VIDEO PRESENT (GREEN)/OVERLOAD (RED)
- S-VIDEO INPUT (CH.4)
- STATUS INDICATORS
1. SYNC PRESENT (GREEN)
 2. VIDEO PRESENT (GREEN)/OVERLOAD (RED)

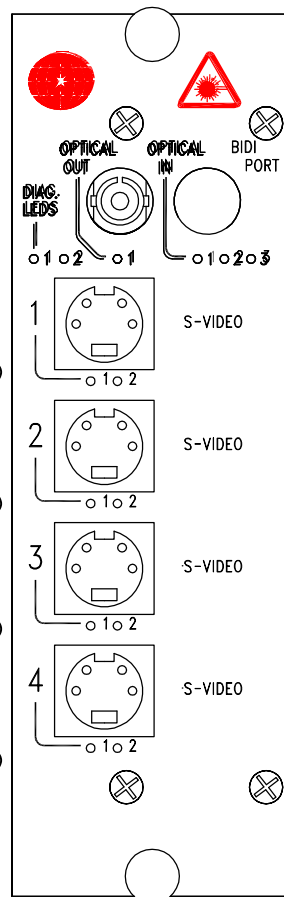

DR-4S-X

PINOUT DIAGRAM

STATUS INDICATORS

1. POWER (GREEN)
2. NA

STATUS INDICATORS

1. NA

S-VIDEO OUTPUT (CH.1)

STATUS INDICATORS

1. SYNC PRESENT (GREEN)
2. VIDEO PRESENT (GREEN)/OVERLOAD (RED)

S-VIDEO OUTPUT (CH.2)

STATUS INDICATORS

1. SYNC PRESENT (GREEN)
2. VIDEO PRESENT (GREEN)/OVERLOAD (RED)

S-VIDEO OUTPUT (CH.3)


STATUS INDICATORS

1. SYNC PRESENT (GREEN)
2. VIDEO PRESENT (GREEN)/OVERLOAD (RED)

S-VIDEO OUTPUT (CH.4)

STATUS INDICATORS

1. SYNC PRESENT (GREEN)
2. VIDEO PRESENT (GREEN)/OVERLOAD (RED)

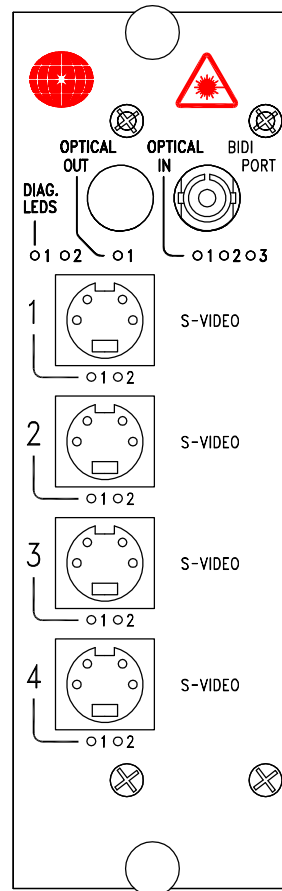

OPTICAL PORT

STATUS INDICATORS

1. RX OPTICAL SIGNAL (GREEN)/ABSENT (RED)
2. NA
3. RX CARRIER (GREEN)/ERROR (RED)