


DT-4V*/1F-X

PINOUT DIAGRAM

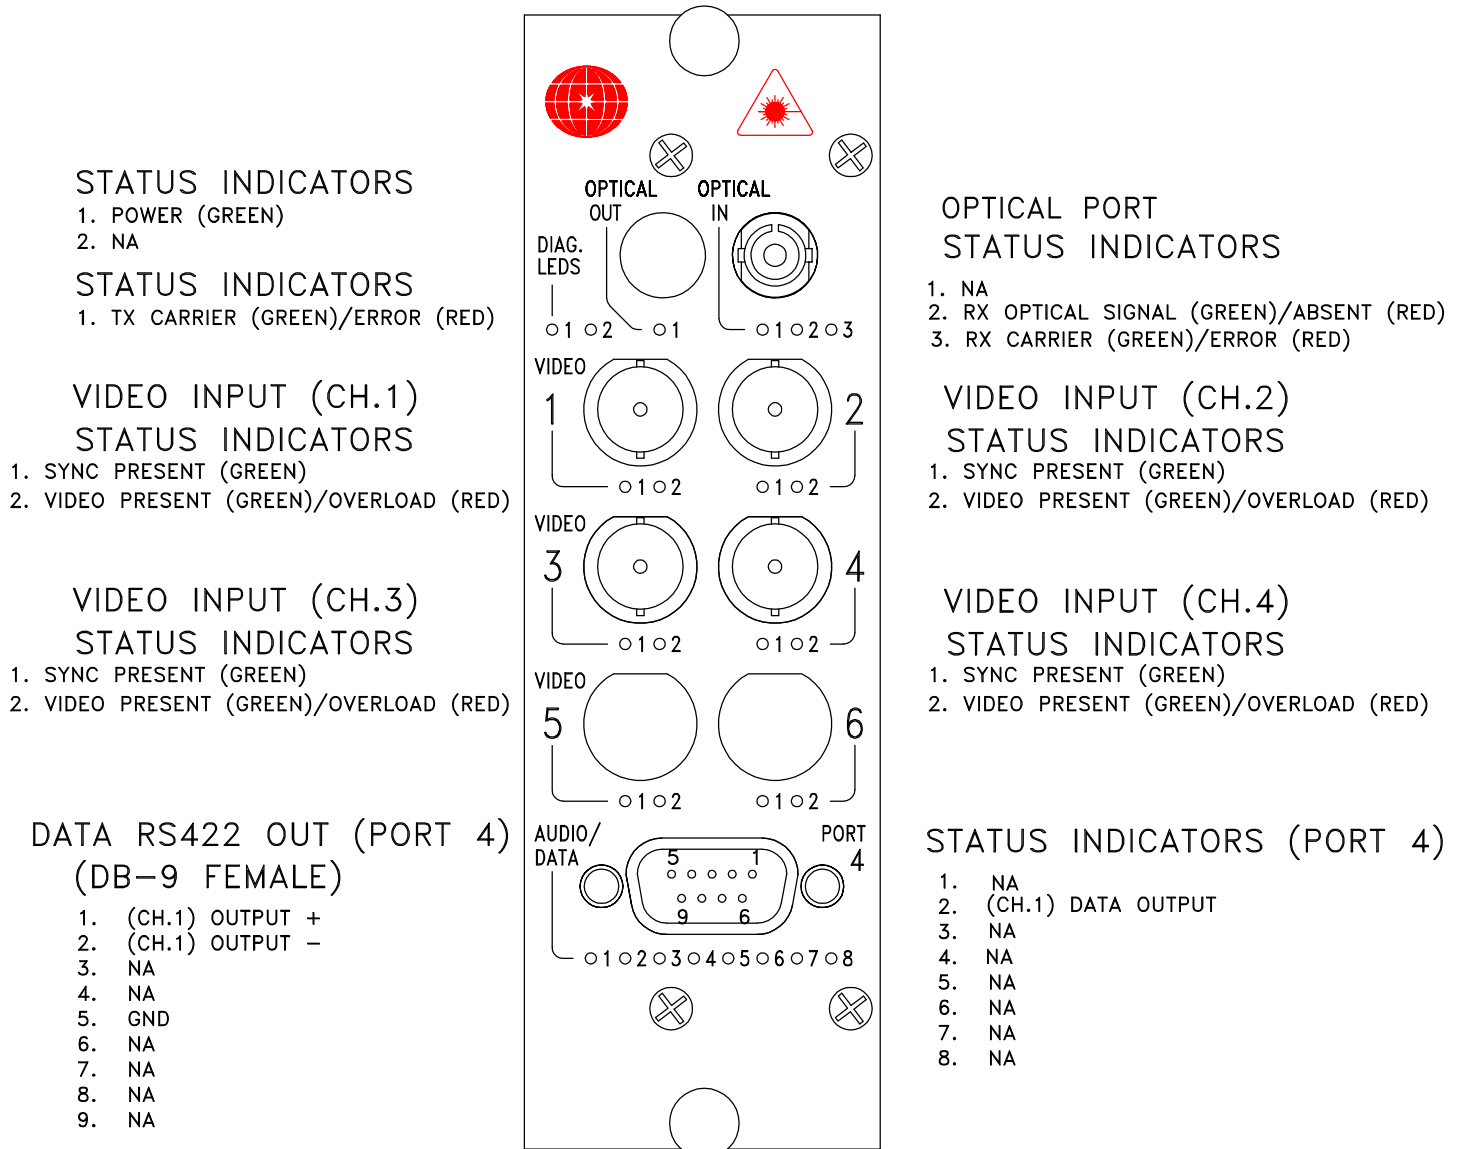

*U-10MHz, 10 BIT VIDEO
 *V-8 BIT VIDEO
 *W-10 BIT VIDEO

DR-4V*/1F-X

PINOUT DIAGRAM

STATUS INDICATORS

1. POWER (GREEN)
2. NA

STATUS INDICATORS

1. TX CARRIER (GREEN)/ERROR (RED)

VIDEO OUTPUT (CH.1)

STATUS INDICATORS

1. SYNC PRESENT (GREEN)
2. VIDEO PRESENT (GREEN)/OVERLOAD (RED)


VIDEO OUTPUT (CH.3)

STATUS INDICATORS

1. SYNC PRESENT (GREEN)
2. VIDEO PRESENT (GREEN)/OVERLOAD (RED)

DATA RS422 IN (PORT 4) (DB-9 FEMALE)

1. (CH.1) INPUT +
2. (CH.1) INPUT -
3. NA
4. NA
5. GND
6. NA
7. NA
8. NA
9. NA

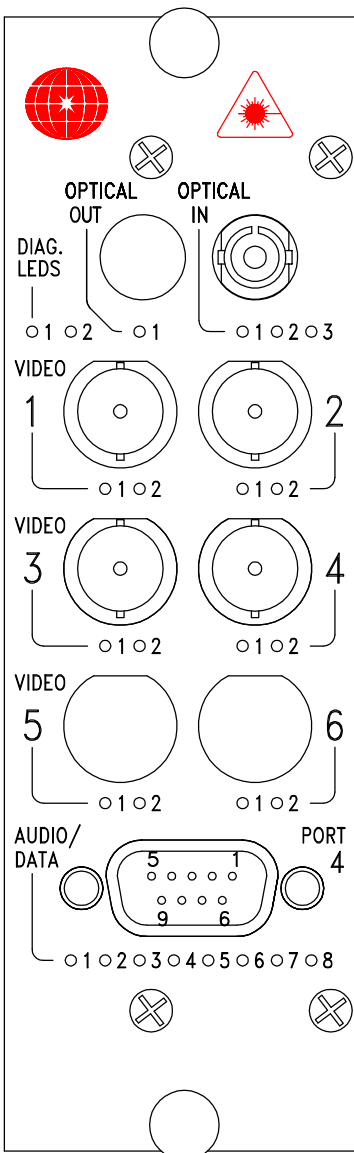

OPTICAL PORT

STATUS INDICATORS

1. NA
2. RX OPTICAL SIGNAL (GREEN)/ABSENT (RED)
3. RX CARRIER (GREEN)/ERROR (RED)

VIDEO OUTPUT (CH.2)

STATUS INDICATORS

1. SYNC PRESENT (GREEN)
2. VIDEO PRESENT (GREEN)/OVERLOAD (RED)

VIDEO OUTPUT (CH.4)

STATUS INDICATORS

1. SYNC PRESENT (GREEN)
2. VIDEO PRESENT (GREEN)/OVERLOAD (RED)

STATUS INDICATORS (PORT 4)

1. (CH.1) DATA INPUT
2. NA
3. NA
4. NA
5. NA
6. NA
7. NA
8. NA

*U-10MHz, 10 BIT VIDEO

*V-8 BIT VIDEO

*W-10 BIT VIDEO