

*V-8 BIT VIDEO
*W-10 BIT VIDEO

DT-4V4C1F/1C1F-X DT-4W4C1F/1C1F-X PINOUT DIAGRAM

STATUS INDICATORS

1. POWER (GREEN)
2. NA

STATUS INDICATORS

1. TX CARRIER (GREEN)/ERROR (RED)

VIDEO INPUT (CH.1)

STATUS INDICATORS

1. SYNC PRESENT (GREEN)
2. VIDEO PRESENT (GREEN)/OVERLOAD (RED)

VIDEO INPUT (CH.3)

STATUS INDICATORS


1. SYNC PRESENT (GREEN)
2. VIDEO PRESENT (GREEN)/OVERLOAD (RED)

CC IN/OUT (PORT 3) (DE-15 FEMALE)

1. (CH.1) INPUT
2. (CH.2) INPUT
3. (CH.3) INPUT
4. (CH.4) INPUT
5. GND
6. (CH.1) OUTPUT
7. (CH.1) OUTPUT
- 8.-15. NA

DATA RS422 IN/OUT (PORT 4) (DB-9 FEMALE)

1. (CH.1) INPUT +
2. (CH.1) INPUT -
3. NA
4. NA
5. GND
6. (CH.1) OUTPUT +
7. (CH.1) OUTPUT -
8. NA
9. NA

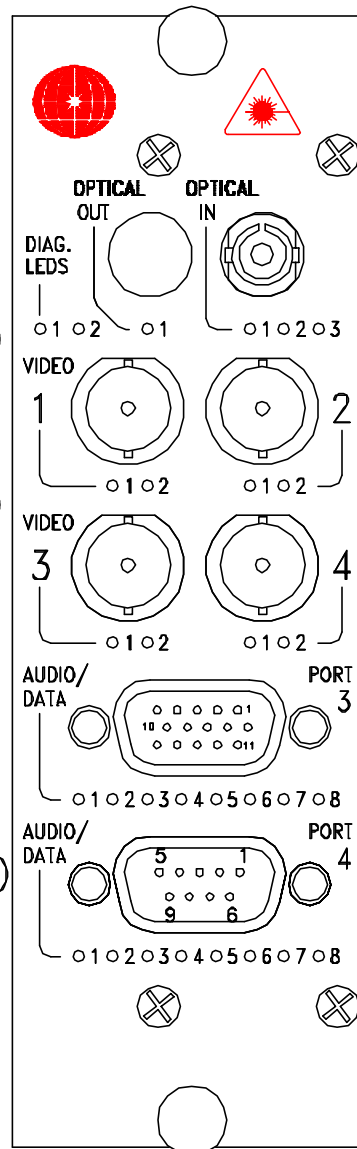

OPTICAL PORT

STATUS INDICATORS

1. NA
2. RX OPTICAL SIGNAL (GREEN)/ABSENT (RED)
3. RX CARRIER (GREEN)/ERROR (RED)

VIDEO INPUT (CH.2)

STATUS INDICATORS

1. SYNC PRESENT (GREEN)
2. VIDEO PRESENT (GREEN)/OVERLOAD (RED)

VIDEO INPUT (CH.4)

STATUS INDICATORS

1. SYNC PRESENT (GREEN)
2. VIDEO PRESENT (GREEN)/OVERLOAD (RED)

STATUS INDICATORS (PORT 3)

1. (CH.1) INPUT PRESENT
2. (CH.1) OUTPUT PRESENT
3. (CH.2) INPUT PRESENT
4. NA
5. (CH.3) INPUT PRESENT
6. NA
7. (CH.4) INPUT PRESENT
8. NA

STATUS INDICATORS (PORT 4)

1. (CH.1) DATA INPUT
2. NA
3. NA
4. NA
5. NA
6. (CH.1) DATA OUTPUT
7. NA
8. NA

*V-8 BIT VIDEO
*W-10 BIT VIDEO

DR-4V4C1F/1C1F-X DR-4W4C1F/1C1F-X PINOUT DIAGRAM

STATUS INDICATORS

1. POWER (GREEN)
2. NA

STATUS INDICATORS

1. TX CARRIER (GREEN)/ERROR (RED)

VIDEO OUTPUT (CH.1)

STATUS INDICATORS

1. SYNC PRESENT (GREEN)
2. VIDEO PRESENT (GREEN)/OVERLOAD (RED)

VIDEO OUTPUT (CH.3)

STATUS INDICATORS


1. SYNC PRESENT (GREEN)
2. VIDEO PRESENT (GREEN)/OVERLOAD (RED)

CC IN/OUT (PORT 3) (DE-15 FEMALE)

1. (CH.1) INPUT
2. NA
3. NA
4. NA
5. GND
6. (CH.1) OUTPUT
7. (CH.1) OUTPUT
8. (CH.2) OUTPUT
9. (CH.2) OUTPUT
10. (CH.3) OUTPUT
11. (CH.3) OUTPUT
12. (CH.4) OUTPUT
13. (CH.4) OUTPUT
14. N/A
15. N/A

DATA RS422 IN/OUT (PORT 4) (DB-9 FEMALE)

1. (CH.1) OUTPUT +
2. (CH.1) OUTPUT -
3. NA
4. NA
5. GND
6. (CH.1) INPUT +
7. (CH.1) INPUT -
8. NA
9. NA

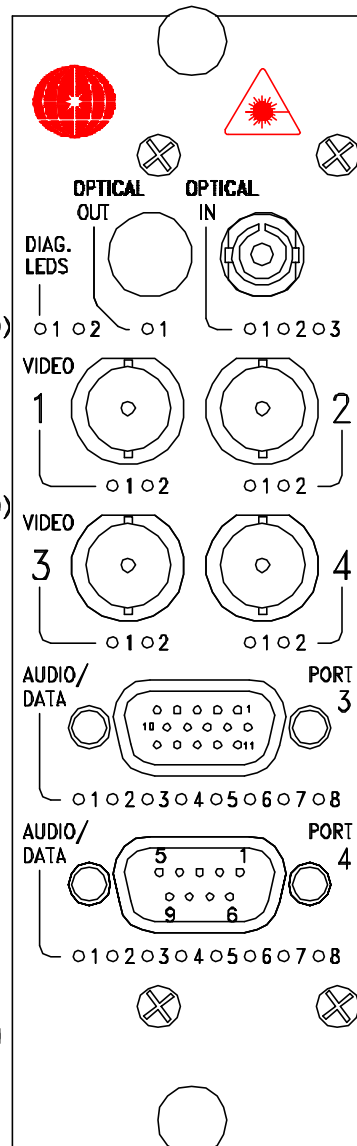

OPTICAL PORT

STATUS INDICATORS

1. NA
2. RX OPTICAL SIGNAL (GREEN)/ABSENT (RED)
3. RX CARRIER (GREEN)/ERROR (RED)

VIDEO OUTPUT (CH.2)

STATUS INDICATORS

1. SYNC PRESENT (GREEN)
2. VIDEO PRESENT (GREEN)/OVERLOAD (RED)

VIDEO OUTPUT (CH.4)

STATUS INDICATORS

1. SYNC PRESENT (GREEN)
2. VIDEO PRESENT (GREEN)/OVERLOAD (RED)

STATUS INDICATORS (PORT 3)

1. (CH.1) INPUT PRESENT
2. (CH.1) OUTPUT PRESENT
3. NA
4. (CH.2) OUTPUT PRESENT
5. NA
6. (CH.3) OUTPUT PRESENT
7. NA
8. (CH.4) OUTPUT PRESENT

STATUS INDICATORS (PORT 4)

1. NA
2. (CH.1) DATA OUTPUT
3. NA
4. NA
5. (CH.1) DATA INPUT
6. NA
7. NA
8. NA