

*V-8 BIT VIDEO
*W-10 BIT VIDEO

DT-4V4C1F/4C1F-X DT-4W4C1F/4C1F-X PINOUT DIAGRAM

STATUS INDICATORS

1. POWER (GREEN)
2. CARD DIAGNOSTIC (GREEN-OK / RED-ALLARM)

STATUS INDICATORS

1. TX CARRIER (GREEN)/ERROR (RED)

VIDEO INPUT (CH.1)

STATUS INDICATORS

1. SYNC PRESENT (GREEN)
2. VIDEO PRESENT (GREEN)/OVERLOAD (RED)

VIDEO INPUT (CH.3)

STATUS INDICATORS


1. SYNC PRESENT (GREEN)
2. VIDEO PRESENT (GREEN)/OVERLOAD (RED)

CC IN/OUT (PORT 3) (DE-15 FEMALE)

1. (CH.1) INPUT
2. (CH.2) INPUT
3. (CH.3) INPUT
4. (CH.4) INPUT
5. GND
6. (CH.1) OUTPUT
7. (CH.1) OUTPUT
8. (CH.2) OUTPUT
9. (CH.2) OUTPUT
10. (CH.3) OUTPUT
11. (CH.3) OUTPUT
12. (CH.4) OUTPUT
13. (CH.4) OUTPUT
14. N/A
15. N/A

DATA RS422 IN/OUT (PORT 4) (DB-9 FEMALE)

1. (CH.1) INPUT +
2. (CH.1) INPUT -
3. NA
4. NA
5. GND
6. (CH.1) OUTPUT +
7. (CH.1) OUTPUT -
8. NA
9. NA

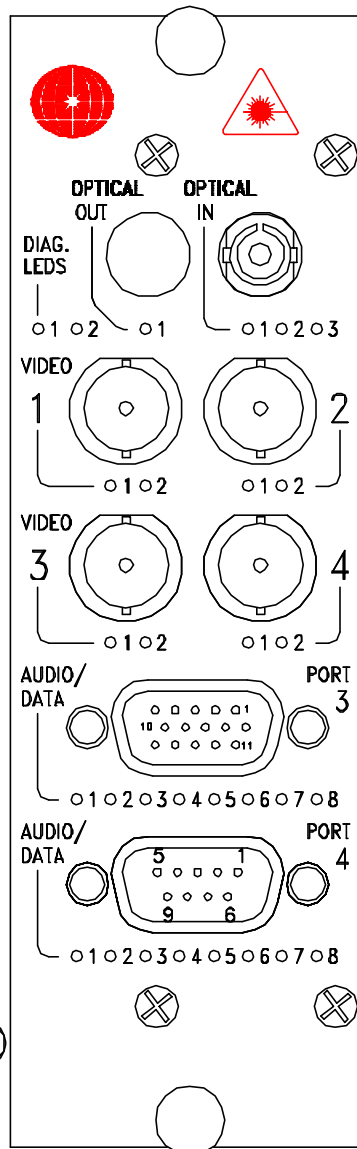

OPTICAL PORT

STATUS INDICATORS

1. NA
2. RX OPTICAL SIGNAL (GREEN)/ABSENT (RED)
3. RX CARRIER (GREEN)/ERROR (RED)

VIDEO INPUT (CH.2)

STATUS INDICATORS

1. SYNC PRESENT (GREEN)
2. VIDEO PRESENT (GREEN)/OVERLOAD (RED)

VIDEO INPUT (CH.4)

STATUS INDICATORS

1. SYNC PRESENT (GREEN)
2. VIDEO PRESENT (GREEN)/OVERLOAD (RED)

STATUS INDICATORS (PORT 3)

1. (CH.1) INPUT PRESENT
2. (CH.1) OUTPUT PRESENT
3. (CH.2) INPUT PRESENT
4. (CH.2) OUTPUT PRESENT
5. (CH.3) INPUT PRESENT
6. (CH.3) OUTPUT PRESENT
7. (CH.4) INPUT PRESENT
8. (CH.4) OUTPUT PRESENT

STATUS INDICATORS (PORT 4)

1. (CH.1) DATA INPUT
2. NA
3. (CH.2) DATA INPUT
4. NA
5. NA
6. (CH.1) DATA OUTPUT
7. NA
8. (CH.2) DATA OUTPUT