

DX-1V1G/1V1G-X

PINOUT DIAGRAM

OPTICAL PORT OUTPUT STATUS INDICATORS

1. POWER (GREEN)
2. NA

STATUS INDICATORS

1. TX CARRIER (GREEN)/ERROR (RED)


VIDEO INPUT (CH.1)

STATUS INDICATORS

1. SYNC PRESENT (GREEN)
2. VIDEO PRESENT (GREEN)
/ OVERLOAD (RED)

MULTI PROTOCOL DIGITAL (PORT 4) PINOUT DIAGRAM

PIN #	RS-232	RS-422	RS-485 2W	RS-485 4W
1		CH1 IN+	CH1 IN/OUT+	CH1 IN+
2	CH1 OUT (TD)			
3	CH1 IN (RD)			
4		CH1 IN-	CH1 IN/OUT-	CH1 IN-
5	GND	GND	GND	GND
6		CH1 OUT+		CH1 OUT+
7	CH2 IN (RTS)			
8	CH2 OUT(CTS)			
9		CH1 OUT-		CH1 OUT-

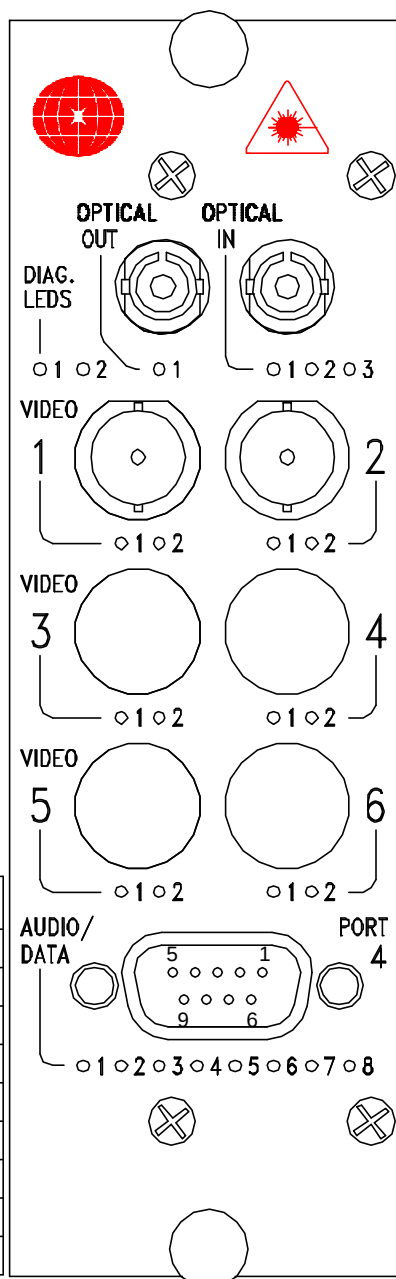

OPTICAL PORT INPUT STATUS INDICATORS

1. RX OPTICAL SIGNAL (GREEN)
/ ABSENT (RED)
2. NA
3. RX CARRIER (GREEN)/ERROR (RED)

VIDEO OUTPUT (CH.2) STATUS INDICATORS

1. SYNC PRESENT (GREEN)
2. VIDEO PRESENT (GREEN)
/ OVERLOAD (RED)

STATUS INDICATORS (PORT 4)

1. (CH.1) DATA INPUT
2. NA
3. (CH.1) DATA OUTPUT
4. NA
5. (CH.2) DATA INPUT
6. NA
7. (CH.2) DATA OUTPUT
8. NA

INTERNAL JUMPER SETTINGS

1 *	2	3	4
RS-232	RS-422	RS-485 2W	RS-485 4W

*FACTORY SETTINGS