

DX-2V4J/2V4J-X

(2 FIBER)

PINOUT DIAGRAM

OPTICAL PORT OUTPUT

STATUS INDICATORS

1. POWER (GREEN)
2. NA

STATUS INDICATORS

1. TX CARRIER (GREEN)/ERROR (RED)

VIDEO INPUT (CH.1)

STATUS INDICATORS

1. SYNC PRESENT (GREEN)
2. VIDEO PRESENT (GREEN)/OVERLOAD (RED)


VIDEO OUTPUT (CH.3)

STATUS INDICATORS

1. SYNC PRESENT (GREEN)
2. VIDEO PRESENT (GREEN)/OVERLOAD (RED)

DATA RS485 IN/OUT (PORT 4) (DB-9 FEMALE)

1. (CH.1) INPUT/OUTPUT +
2. (CH.1) INPUT/OUTPUT -
3. (CH.2) INPUT/OUTPUT +
4. (CH.2) INPUT/OUTPUT -
5. GND
6. (CH.3) INPUT/OUTPUT +
7. (CH.3) INPUT/OUTPUT -
8. (CH.4) INPUT/OUTPUT +
9. (CH.4) INPUT/OUTPUT -

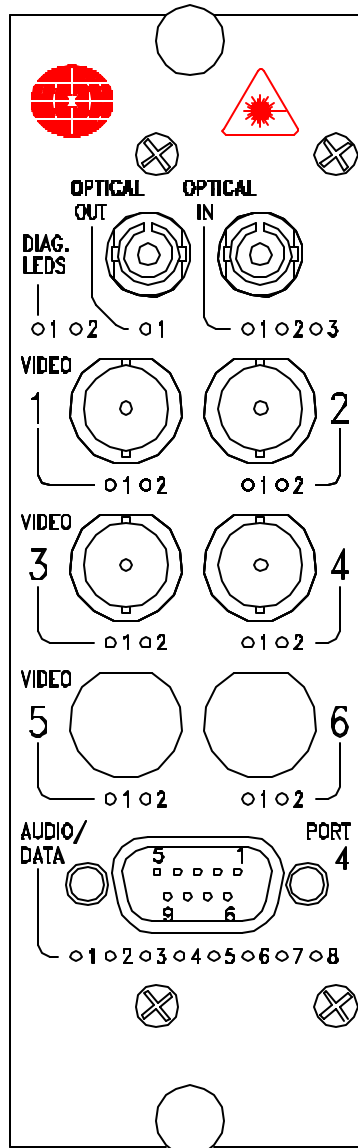

OPTICAL PORT INPUT

STATUS INDICATORS

1. RX OPTICAL SIGNAL (GREEN)
2. NA
3. RX CARRIER (GREEN)/ERROR (RED)

VIDEO INPUT (CH.2)

STATUS INDICATORS

1. SYNC PRESENT (GREEN)
2. VIDEO PRESENT (GREEN)/OVERLOAD (RED)

VIDEO OUTPUT (CH.4)

STATUS INDICATORS

1. SYNC PRESENT (GREEN)
2. VIDEO PRESENT (GREEN)/OVERLOAD (RED)

STATUS INDICATORS (PORT 4)

1. (CH.1) DATA INPUT
2. (CH.1) DATA OUTPUT
3. (CH.2) DATA INPUT
4. (CH.2) DATA OUTPUT
5. (CH.3) DATA INPUT
6. (CH.3) DATA OUTPUT
7. (CH.4) DATA INPUT
8. (CH.4) DATA OUTPUT