

DXA/DXB-2A/2A-X


PINOUT DIAGRAM

STATUS INDICATORS

1. POWER (GREEN)
2. NA

STATUS INDICATORS

1. TX CARRIER (GREEN)/ERROR (RED)

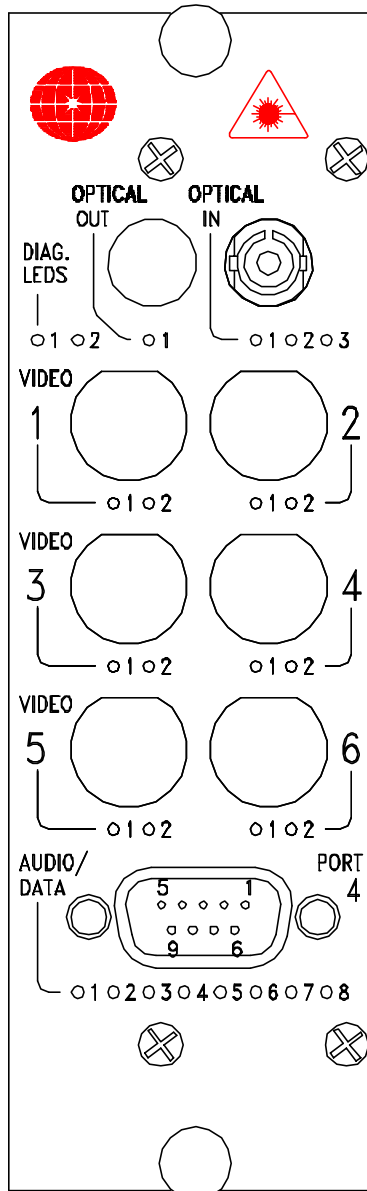

OPTICAL PORT

STATUS INDICATORS

1. NA
2. RX OPTICAL SIGNAL (GREEN)/ABSENT (RED)
3. RX CARRIER (GREEN)/ERROR (RED)

AUDIO INPUT/OUTPUT (PORT 4) (DB-9 FEMALE)

1. (CH.1) OUTPUT -
2. (CH.1) OUTPUT +
3. (CH.2) OUTPUT -
4. (CH.2) OUTPUT +
5. GND
6. (CH.1) INPUT -
7. (CH.1) INPUT +
8. (CH.2) INPUT -
9. (CH.2) INPUT +

STATUS INDICATORS (PORT 4)

1. (CH.1) AUDIO INPUT PRESENT
2. (CH.1) AUDIO INPUT OVERLOAD
3. (CH.2) AUDIO INPUT PRESENT
4. (CH.2) AUDIO INPUT OVERLOAD
5. (CH.1) AUDIO OUTPUT PRESENT
6. (CH.1) AUDIO OUTPUT OVERLOAD
7. (CH.2) AUDIO OUTPUT PRESENT
8. (CH.2) AUDIO OUTPUT OVERLOAD