

DXA-4F/4F-X

PINOUT DIAGRAM

STATUS INDICATORS

1. POWER (GREEN)
2. NA

STATUS INDICATORS


1. TX CARRIER (GREEN)/ERROR (RED)

ATA RS422 IN/OUT (PORT 3) (DB-9 FEMALE)

1. (CH.1) INPUT +
2. (CH.1) INPUT -
3. (CH.2) INPUT +
4. (CH.2) INPUT -
5. GND
6. (CH.1) OUTPUT +
7. (CH.1) OUTPUT -
8. (CH.2) OUTPUT +
9. (CH.2) OUTPUT -

ATA RS422 IN/OUT (PORT 4) (DB-9 FEMALE)

1. (CH.1) INPUT +
2. (CH.1) INPUT -
3. (CH.2) INPUT +
4. (CH.2) INPUT -
5. GND
6. (CH.1) OUTPUT +
7. (CH.1) OUTPUT -
8. (CH.2) OUTPUT +
9. (CH.2) OUTPUT -

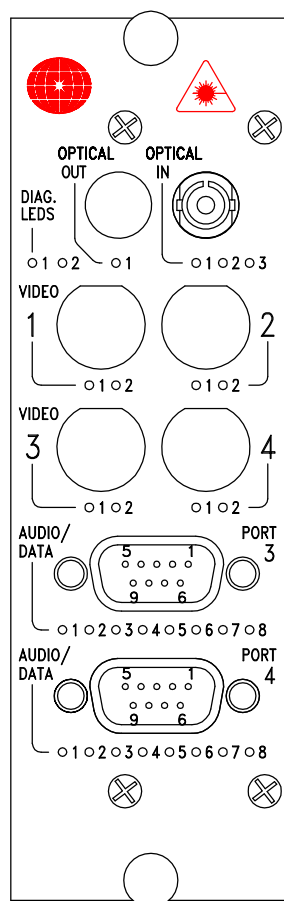

OPTICAL PORT

STATUS INDICATORS

1. NA
2. RX OPTICAL SIGNAL (GREEN)/ABSENT (RED)
3. RX CARRIER (GREEN)/ERROR (RED)

STATUS INDICATORS (PORT 3)

1. (CH.1) DATA INPUT
2. NA
3. (CH.2) DATA INPUT
4. NA
5. NA
6. (CH.1) DATA OUTPUT
7. NA
8. (CH.2) DATA OUTPUT

STATUS INDICATORS (PORT 4)

1. (CH.1) DATA INPUT
2. NA
3. (CH.2) DATA INPUT
4. NA
5. NA
6. (CH.1) DATA OUTPUT
7. NA
8. (CH.2) DATA OUTPUT

DXB-4F/4F-X

PINOUT DIAGRAM

STATUS INDICATORS

1. POWER (GREEN)
2. NA

STATUS INDICATORS


1. TX CARRIER (GREEN)/ERROR (RED)

DATA RS422 IN/OUT (PORT 3) (DB-9 FEMALE)

1. (CH.1) OUTPUT +
2. (CH.1) OUTPUT -
3. (CH.2) OUTPUT +
4. (CH.2) OUTPUT -
5. GND
6. (CH.1) INPUT +
7. (CH.1) INPUT -
8. (CH.2) INPUT +
9. (CH.2) INPUT -

DATA RS422 IN/OUT (PORT 4) (DB-9 FEMALE)

1. (CH.1) OUTPUT +
2. (CH.1) OUTPUT -
3. (CH.2) OUTPUT +
4. (CH.2) OUTPUT -
5. GND
6. (CH.1) INPUT +
7. (CH.1) INPUT -
8. (CH.2) INPUT +
9. (CH.2) INPUT -

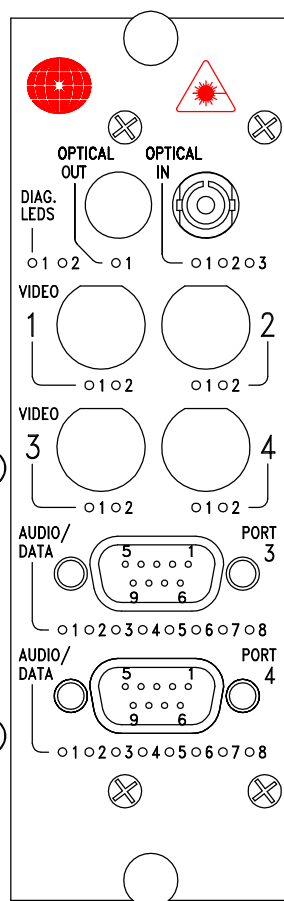

OPTICAL PORT

STATUS INDICATORS

1. NA
2. RX OPTICAL SIGNAL (GREEN)/ABSENT (RED)
3. RX CARRIER (GREEN)/ERROR (RED)

STATUS INDICATORS (PORT 3)

1. NA
2. (CH.1) DATA OUTPUT
3. NA
4. (CH.2) DATA OUTPUT
5. (CH.1) DATA INPUT
6. NA
7. (CH.2) DATA INPUT
8. NA

STATUS INDICATORS (PORT 4)

1. NA
2. (CH.1) DATA OUTPUT
3. NA
4. (CH.2) DATA OUTPUT
5. (CH.1) DATA INPUT
6. NA
7. (CH.2) DATA INPUT
8. NA