

DXA/DXB-4J/4J-X

PINOUT DIAGRAM

STATUS INDICATORS

1. POWER (GREEN)
2. NA

STATUS INDICATORS

1. TX CARRIER (GREEN)/ERROR (RED)


OPTICAL PORT

STATUS INDICATORS

1. NA
2. RX OPTICAL SIGNAL (GREEN)/ABSENT (RED)
3. RX CARRIER (GREEN)/ERROR (RED)

DATA RS485 IN/OUT (PORT 4) (DB-9 FEMALE)

1. (CH.1) INPUT/OUTPUT +
2. (CH.1) INPUT/OUTPUT -
3. (CH.2) INPUT/OUTPUT +
4. (CH.2) INPUT/OUTPUT -
5. GND
6. (CH.3) INPUT/OUTPUT +
7. (CH.3) INPUT/OUTPUT -
8. (CH.4) INPUT/OUTPUT +
9. (CH.4) INPUT/OUTPUT -

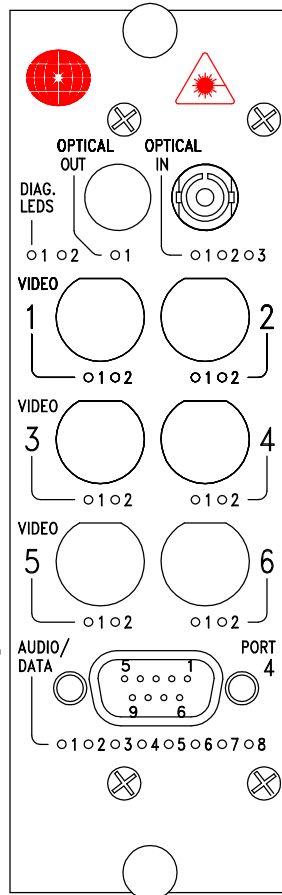

STATUS INDICATORS (PORT 4)

1. (CH.1) DATA INPUT
2. (CH.1) DATA OUTPUT
3. (CH.2) DATA INPUT
4. (CH.2) DATA OUTPUT
5. (CH.3) DATA INPUT
6. (CH.3) DATA OUTPUT
7. (CH.4) DATA INPUT
8. (CH.4) DATA OUTPUT