

DXA/DXB-8L/8L-X

PINOUT DIAGRAM

STATUS INDICATORS

1. POWER (GREEN)
2. NA

STATUS INDICATORS


1. TX CARRIER (GREEN)/ERROR (RED)

DATA TTL IN/OUT (PORT 3) (DB-15 FEMALE)

1. (CH.1) INPUT
2. (CH.2) INPUT
3. (CH.3) INPUT
4. (CH.4) INPUT
5. GND
6. NA
7. (CH.1) OUTPUT
8. NA
9. (CH.2) OUTPUT
10. NA
11. (CH.3) OUTPUT
12. NA
13. (CH.4) OUTPUT
14. NA
15. NA

DATA TTL IN/OUT (PORT 4) (DB-15HD FEMALE)

1. (CH.5) INPUT
2. (CH.6) INPUT
3. (CH.7) INPUT
4. (CH.8) INPUT
5. GND
6. NA
7. (CH.5) OUTPUT
8. NA
9. (CH.6) OUTPUT
10. NA
11. (CH.7) OUTPUT
12. NA
13. (CH.8) OUTPUT
14. NA
15. NA

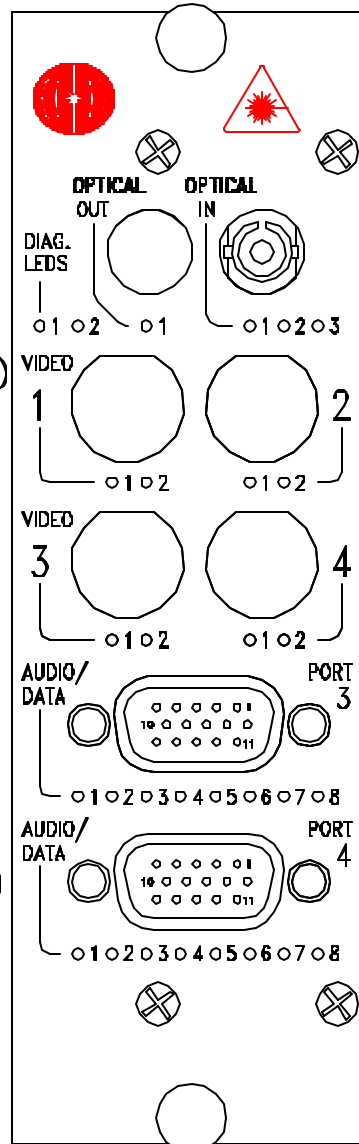

OPTICAL PORT STATUS INDICATORS

1. NA
2. RX OPTICAL SIGNAL (GREEN)/ABSENT (RED)
3. RX CARRIER (GREEN)/ERROR (RED)

STATUS INDICATORS (PORT 3)

1. (CH.1) INPUT PRESENT
2. (CH.1) OUTPUT PRESENT
3. (CH.2) INPUT PRESENT
4. (CH.2) OUTPUT PRESENT
5. (CH.3) INPUT PRESENT
6. (CH.3) OUTPUT PRESENT
7. (CH.4) INPUT PRESENT
8. (CH.4) OUTPUT PRESENT

STATUS INDICATORS (PORT 4)

1. (CH.5) INPUT PRESENT
2. (CH.5) OUTPUT PRESENT
3. (CH.6) INPUT PRESENT
4. (CH.6) OUTPUT PRESENT
5. (CH.3) INPUT PRESENT
6. (CH.3) OUTPUT PRESENT
7. (CH.4) INPUT PRESENT
8. (CH.4) OUTPUT PRESENT