


FXA/FXB-2C2J/2C2J-X

PINOUT DIAGRAM

STATUS INDICATORS

PWR - POWER (GREEN)
 DIAG - CARD DIAGNOSTIC*
 (GREEN-OK, RED-ALARM)
 TX C/L - TX CARRIER (GREEN)
 /OVERLOAD (RED)
 RX C/E - RX CARRIER (GREEN)
 /ERROR (RED)
 SYN - NA
 VID - NA

DR1 - NA
 DR2 - NA
 AR1 - NA
 AR2 - NA
 CR1 - (CH.1) C/C INPUT
 CR2 - (CH.2) C/C INPUT
 DT1 - (CH.1) C/C OUTPUT
 DT2 - (CH.2) C/C OUTPUT
 AT1 - (CH.1) DATA INPUT
 AT2 - (CH.2) DATA INPUT
 CT1 - (CH.1) DATA OUTPUT
 CT2 - (CH.2) DATA OUTPUT

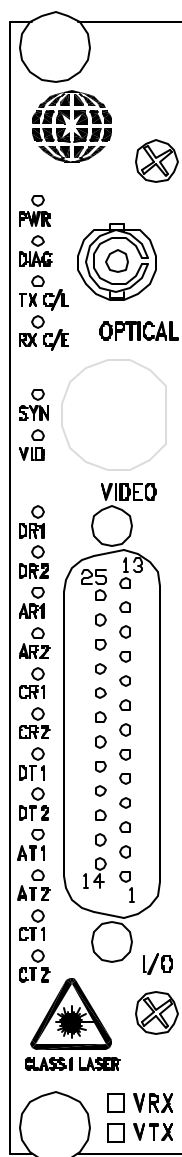

OPTICAL PORT (ST, FC)

DATA INPUT/OUTPUT
 (DB-25 FEMALE)

6. (CH.1) CC INPUT
 20. (CH.1) CC OUTPUT-
 8. (CH.1) CC OUTPUT+
 18. (CH.2) CC INPUT
 21. (CH.2) CC OUTPUT-
 9. (CH.2) CC OUTPUT+
 4. (CH.1) RS485 (2W) INPUT/OUTPUT-
 16. (CH.1) RS485 (2W) INPUT/OUTPUT+
 2. (CH.2) RS485 (2W) INPUT/OUTPUT-
 14. (CH.2) RS485 (2W) INPUT/OUTPUT+
 1. GND
 7. GND

MERIDIAN TECHNOLOGIES INC.
 700 ELMONT ROAD, ELMONT, N.Y. 11003
 Support: 516-285-1000,
 919-847-6638
 WWW.MERIDIAN-TECH.COM

* CARD DIAGNOSTIC IF APPLICABLE
 FILE NAME: FTFR-JU2A2C2G-IM2A2C2G.DWG
 03/29/2013 V.0