

FXA/FXB-2J/2J-X


PINOUT DIAGRAM

STATUS INDICATORS

PWR - POWER (GREEN)
 DIAG - CARD DIAGNOSTIC*
 (GREEN-OK, RED-ALARM)
 TX C/L - TX CARRIER (GREEN)
 /OVERLOAD (RED)
 RX C/E - RX CARRIER (GREEN)
 /ERROR (RED)
 SYN - NA
 VID - NA

STATUS INDICATORS

1 - NA
 2 - NA
 3 - NA
 4 - NA
 5 - NA
 6 - NA
 7 - NA
 8 - NA
 9 - (CH.1) DATA INPUT
 10 - (CH.2) DATA INPUT
 11 - (CH.1) DATA OUTPUT
 12 - (CH.2) DATA OUTPUT

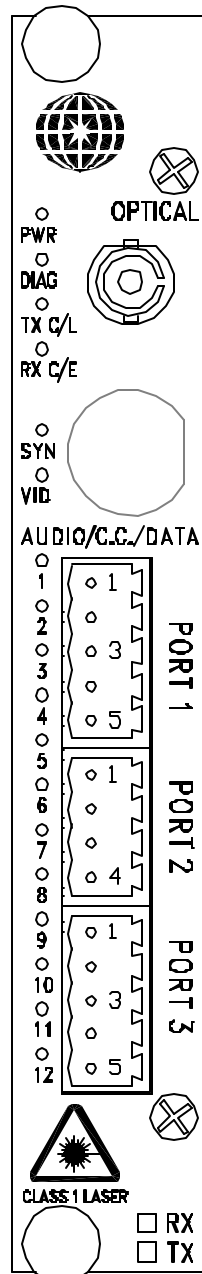

OPTICAL PORT (ST, FC)

DATA INPUT/OUTPUT

CHANNEL 2 (PORT1)

1. DATA INPUT/OUTPUT +
2. DATA INPUT/OUTPUT -
3. NA
4. NA
5. GND

CHANNEL 1 (PORT3)

1. DATA INPUT/OUTPUT +
2. DATA INPUT/OUTPUT -
3. NA
4. NA
5. GND

* CARD DIAGNOSTIC IF APPLICABLE

MERIDIAN TECHNOLOGIES INC.
 700 ELMONT ROAD, ELMONT, N.Y. 11003
 Support: 516-285-1000,
 919-847-6638
 WWW.MERIDIAN-TECH.COM