


MXA/MXB-1R-X

PINOUT DIAGRAM

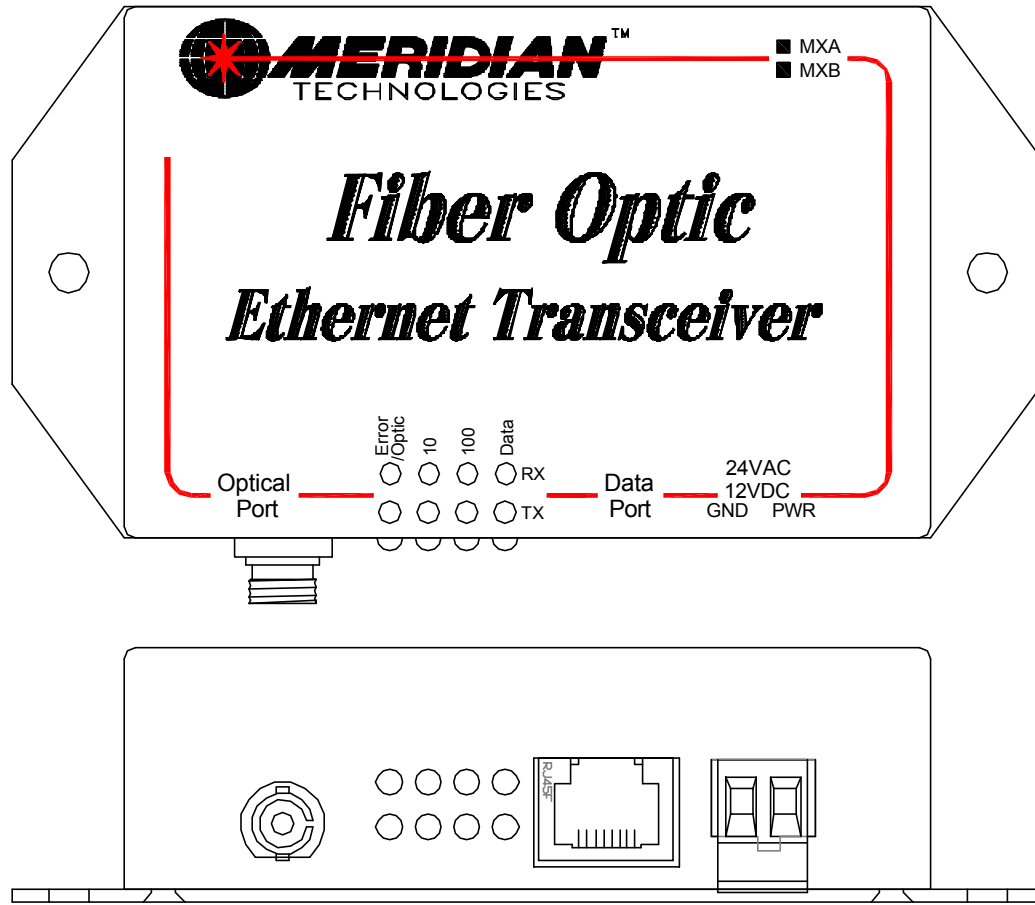

OPTICAL PORT IN/OUT (ST, FC)

STATUS INDICATORS

TX ERROR - NORMAL OFF/LASER DRIVER ERROR (GREEN)
 RX OPTIC - NORMAL OFF/OPTICAL SIGNAL ABSENT (GREEN)
 TX 10 - 10 BASE-T DATA INPUT (GREEN)
 RX 10 - 10 BASE-T DATA OUTPUT (GREEN)
 TX 100 - 100 BASE-T DATA INPUT (GREEN)
 RX 100 - 100 BASE-T DATA OUTPUT (GREEN)
 TX DATA - DATA ACTIVITY INPUT (GREEN)
 RX DATA - DATA ACTIVITY OUTPUT (GREEN)

10/100 ETHERNET INPUT/OUTPUT
 (RJ-45 FEMALE)

12 - 24 VAC / DC