

MXA/MXB-4HD1R/4HD1R-24

PIN-OUT DIAGRAM

STATUS INDICATORS

COMMON INDICATORS

PWR —POWER (GREEN)
 DIAG —NA
 TX C/L —NA
 RX C/E —NA

Video TX card (CH.1-4)


SYN — SIGNAL PRESENT (GREEN)
 VIDEO — LASER ON (GREEN)

Video RX card (CH.1-4)

SYN — LEVEL 0/–10dBm (GREEN)
 VIDEO — LEVEL –10/–20dBm (GREEN)

ETHERNET TX/RX card (CH.1)

T10 —10 BASE-T DATA INPUT (GREEN)
 T100 —100 BASE-T DATA INPUT (GREEN)
 R10 —10 BASE-T DATA OUTPUT (GREEN)
 R100 —100 BASE-T DATA OUTPUT (GREEN)
 TXD — DATA ACTIVITY INPUT (GREEN)
 RXD — DATA ACTIVITY OUTPUT (GREEN)

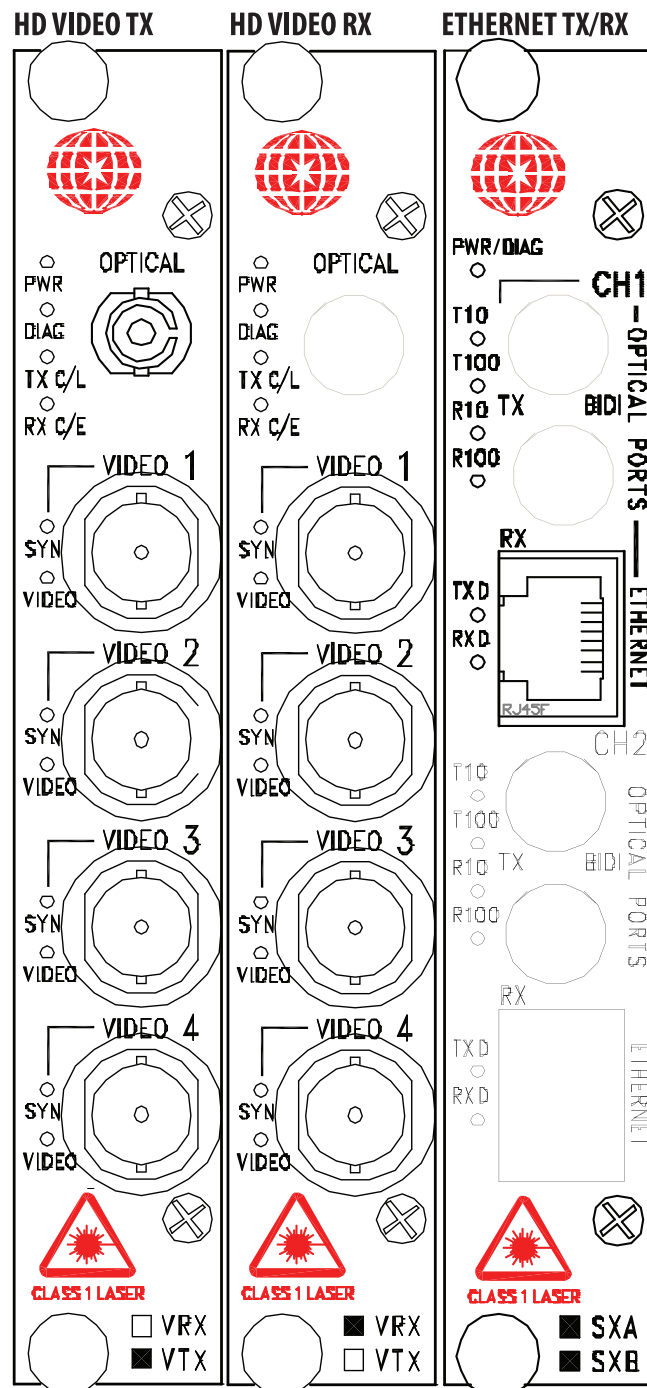

PORTS

COMMON PORTS

OPTICAL PORT
 (FC, ST)

Video TX card (CH.1-4)

VIDEO INPUT (BNC CONNECTOR)

Video RX card (CH.1-4)

VIDEO OUTPUT (BNC CONNECTOR)

ETHERNET TX/RX card (CH.1)

**10/100 ETHERNET
 INPUT/OUTPUT**
 (RJ-45 FEMALE CONNECTOR)