


ST-1B1C/1B-X

PINOUT DIAGRAM

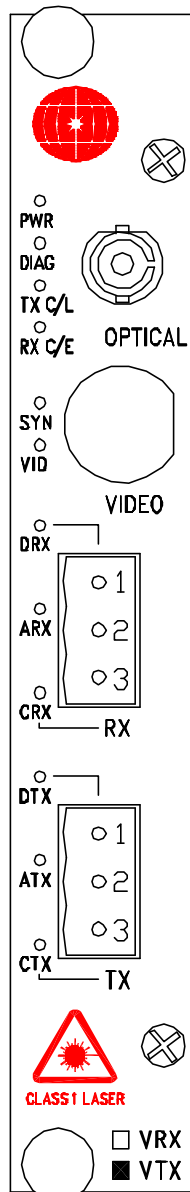

OPTICAL PORT (ST, FC)

STATUS INDICATORS

PWR - POWER (GREEN)

DIAG - NA

TX C/L - TX CARRIER (GREEN) / OVERLOAD (RED)

RX C/E - RX CARRIER (GREEN) / ERROR (RED)

SYN - NA

VID - NA

AUDIO INPUT/OUTPUT

1. AUDIO IN/OUT
2. GND
3. NA

STATUS INDICATORS

DRX - NA

ARX - AUDIO OUTPUT

CRX - NA

DATA INPUT

1. CC INPUT
2. GND
3. NA

STATUS INDICATORS


DTX - CC INPUT

ATX - AUDIO INPUT

CTX - NA

SR-1B1C/1B-X

PINOUT DIAGRAM

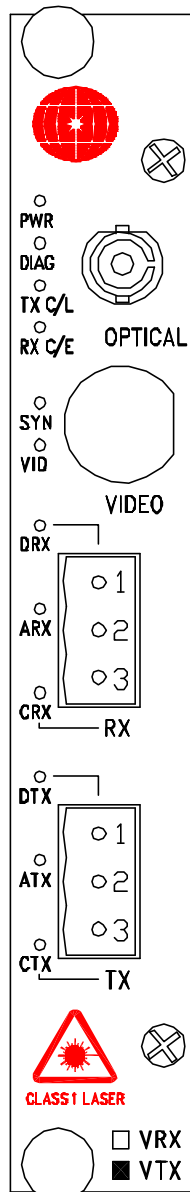

OPTICAL PORT (ST, FC)

STATUS INDICATORS

PWR - POWER (GREEN)

DIAG - NA

TX C/L - TX CARRIER (GREEN) / OVERLOAD (RED)

RX C/E - RX CARRIER (GREEN) / ERROR (RED)

SYN - NA

VID - NA

AUDIO IN/OUT

1. AUDIO IN/OUT

2. GND

3. NA

STATUS INDICATORS

DRX - AUDIO OUTPUT

ARX - NA

CRX - CC OUTPUT

CC OUTPUT

1. CC OUTPUT

2. GND

3. CC OUTPUT

STATUS INDICATORS

DTX - NA

ATX - AUDIO INPUT

CTX - NA