ST-1W1B1C/1B1C-XS

PINOUT DIAGRAM

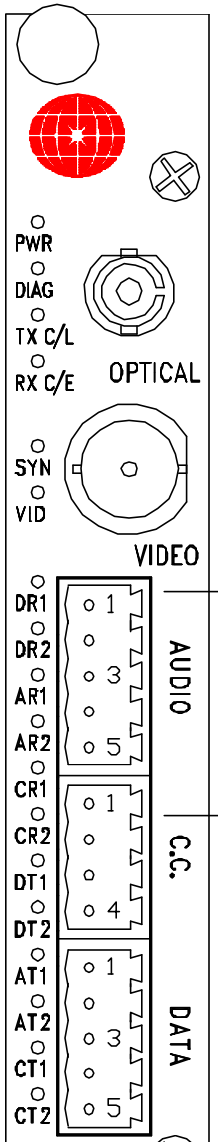

OPTICAL PORT (ST, FC)

STATUS INDICATORS

PWR - POWER (GREEN)
DIAG - NA
TX C/L - TX CARRIER (GREEN) / OVERLOAD (RED)
RX C/E - RX CARRIER (GREEN) / ERROR (RED)

VIDEO INPUT

STATUS INDICATORS

SYN - SYNC PRESENT (GREEN)
VID - VIDEO PRESENT (GREEN) / OVERLOAD (RED)

AUDIO INPUT/OUTPUT

1. (CH.1) AUDIO INPUT / OUTPUT
2. NA
3. NA
4. NA
5. GND

CC INPUT/OUTPUT (CH.1)

1. (CH.1) CC OUTPUT-
2. (CH.1) CC OUTPUT+
3. (CH.1) CC INPUT
4. (CH.1) GND

STATUS INDICATORS

DR1 - NA
DR2 - NA
AR1 - (CH.1) AUDIO OUTPUT
AR2 - NA
CR1 - (CH.1) C/C OUTPUT
CR2 - NA
DT1 - NA
DT2 - NA
AT1 - (CH.1) AUDIO INPUT
AT2 - NA
CT1 - (CH.1) C/C INPUT
CT2 - NA