

ST-1W1F/1F-xP

PINOUT DIAGRAM

3-PIN CONNECTOR VERSION

STATUS INDICATORS


PWR - POWER (GREEN)
DIAG - N//A

TX C/L - TX CARRIER (GREEN) / OVERLOAD (RED)
RX C/E - RX CARRIER (GREEN) / ERROR (RED)

SYN - SYNC PRESENT (GREEN)
VID - VIDEO PRESENT (GREEN) / OVERLOAD (RED)

1. DATA OUTPUT

7. DATA INPUT

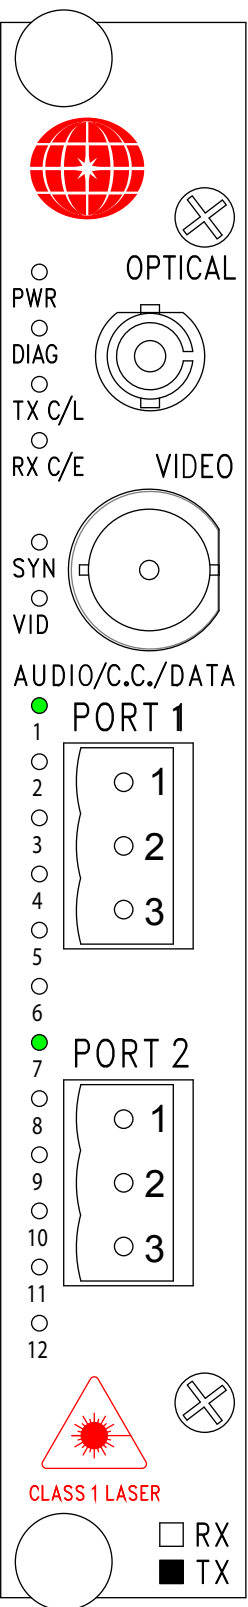

OPTICAL PORT (ST, FC)

VIDEO IN

DATA OUT

1. (CH.1) OUTPUT -
2. GND
3. (CH.1) OUTPUT +

DATA IN

1. (CH.1) INPUT -
2. GND
3. (CH.1) INPUT +

SR-1W1F/1F-xP

PINOUT DIAGRAM

3-PIN CONNECTOR VERSION


STATUS INDICATORS

PWR - POWER (GREEN)
DIAG - N/A
TX C/L - TX CARRIER (GREEN) / OVERLOAD (RED)
RX C/E - RX CARRIER (GREEN) / ERROR (RED)

SYN - SYNC PRESENT (GREEN)
VID - VIDEO PRESENT (GREEN) / OVERLOAD (RED)

1. DATA OUTPUT

7. DATA INPUT

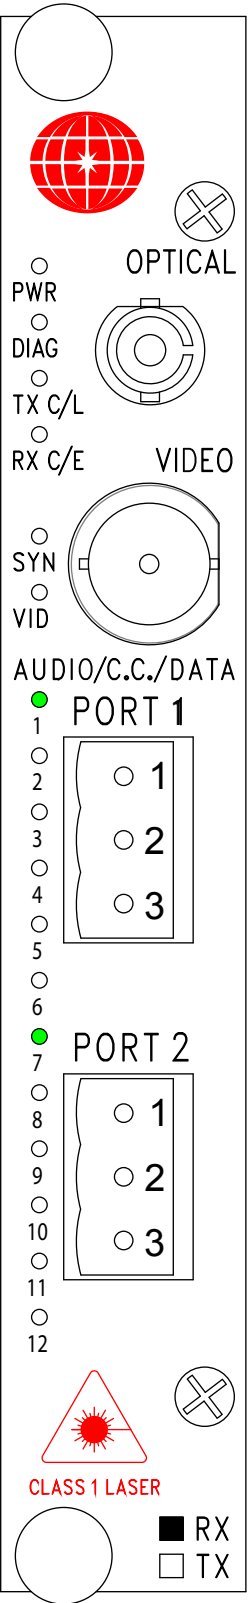

OPTICAL PORT (ST, FC)

VIDEO OUT

DATA OUT

1. (CH.1) OUTPUT -
2. GND
3. (CH.1) OUTPUT +

DATA IN

1. (CH.1) INPUT -
2. GND
3. (CH.1) INPUT +