


ST-1U1G/1G-X ST-1W1G/1G-X

PINOUT DIAGRAM

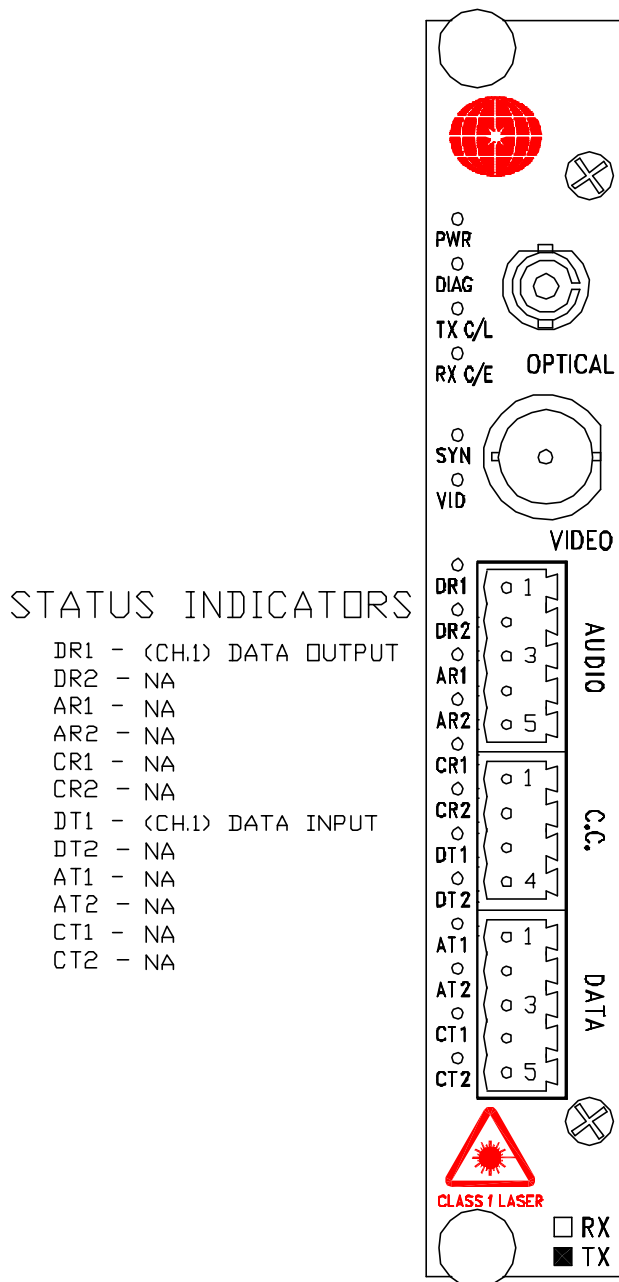

OPTICAL PORT (ST, FC)

STATUS INDICATORS

PWR - POWER (GREEN)

DIAG - NA

TX C/L - TX CARRIER (GREEN) / OVERLOAD (RED)

RX C/E - RX CARRIER (GREEN) / ERROR (RED)

VIDEO INPUT

STATUS INDICATORS

SYN - SYNC PRESENT (GREEN)

VID - VIDEO PRESENT (GREEN) / OVERLOAD (RED)

DATA MULTI PROTOCOL DIGITAL PINOUT DIAGRAM


PIN #	RS-232	RS-422	RS-485 2W	RS-485 4W
1	CH1 IN (RD)	CH1 IN-	CH1 IN/OUT-	CH1 IN-
2		CH1 IN+	CH1 IN/OUT+	CH1 IN+
3	CH1 OUT (TD)	CH1 OUT-		CH1 OUT-
4		CH1 OUT+		CH1 OUT+
5	GND	GND	GND	GND

*U-10MHz, 10 BIT VIDEO

*W-10 BIT VIDEO

SR-1U1G/1G-X SR-1W1G/1G-X

PINOUT DIAGRAM

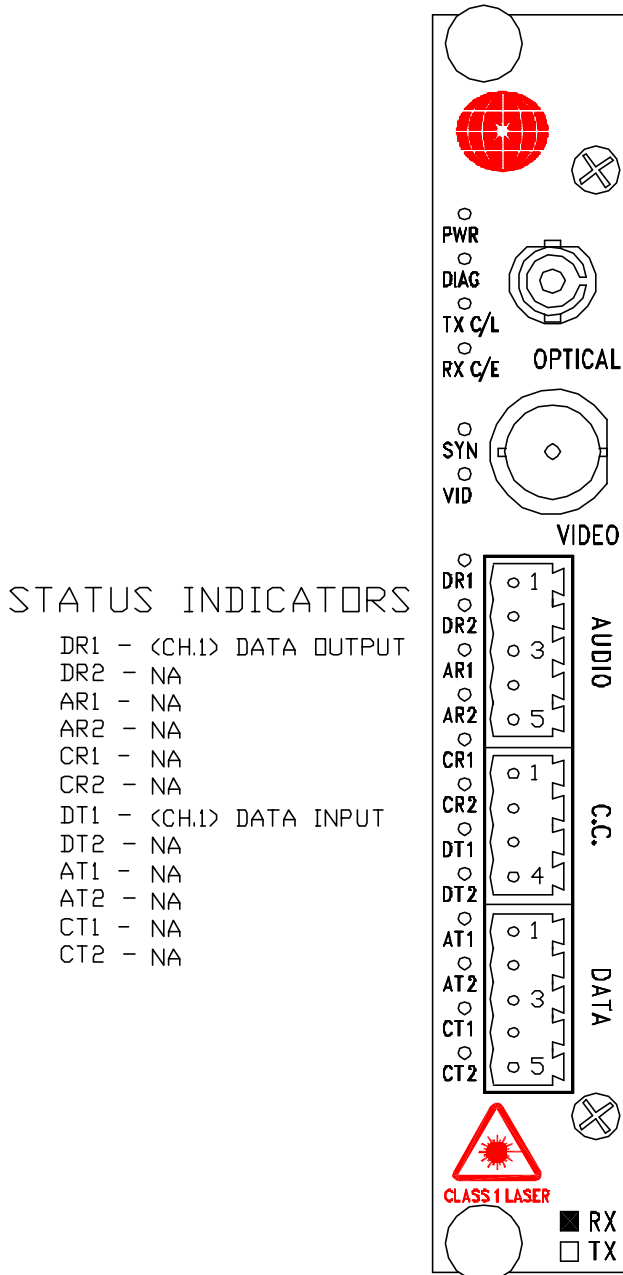

OPTICAL PORT (ST, FC)

STATUS INDICATORS

PWR - POWER (GREEN)

DIAG - NA

TX C/L - TX CARRIER (GREEN) / OVERLOAD (RED)

RX C/E - RX CARRIER (GREEN) / ERROR (RED)

VIDEO OUTPUT

STATUS INDICATORS

SYN - SYNC PRESENT (GREEN)

VID - VIDEO PRESENT (GREEN) / OVERLOAD (RED)

DATA MULTI PROTOCOL DIGITAL PINOUT DIAGRAM

PIN #	RS-232	RS-422	RS-485 2W	RS-485 4W
1	CH1 IN (RD)	CH1 IN-	CH1 IN/OUT-	CH1 IN-
2		CH1 IN+	CH1 IN/OUT+	CH1 IN+
3	CH1 OUT (TD)	CH1 OUT-		CH1 OUT-
4		CH1 OUT+		CH1 OUT+
5	GND	GND	GND	GND

*U-10MHz, 10 BIT VIDEO

*W-10 BIT VIDEO