


ST-1W1K/1K-X

PINOUT DIAGRAM

(RS-485 4-WIRE)

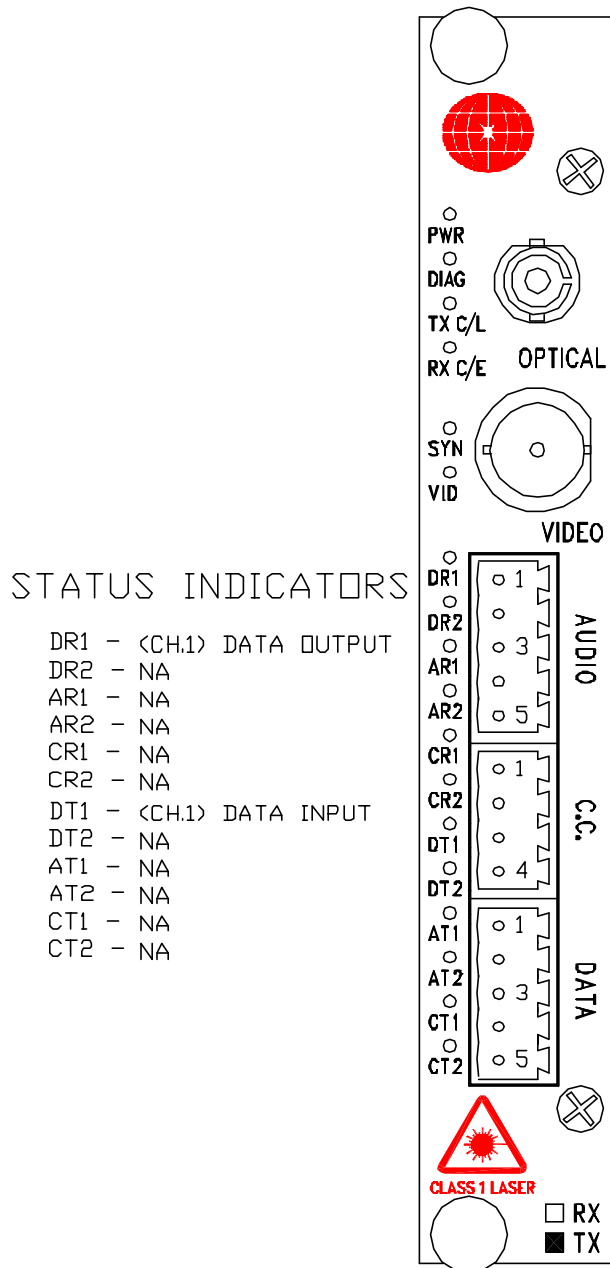

OPTICAL PORT (ST, FC)

STATUS INDICATORS

PWR - POWER (GREEN)

DIAG - CARD DIAGNOSTIC (GREEN-OK, RED-ALARM)

TX C/L - TX CARRIER (GREEN) / OVERLOAD (RED)

RX C/E - RX CARRIER (GREEN) / ERROR (RED)

VIDEO INPUT

STATUS INDICATORS

SYN - SYNC PRESENT (GREEN)

VID - VIDEO PRESENT (GREEN) / OVERLOAD (RED)

AUDIO N/A

CC N/A

DATA INPUT/OUTPUT

1. (CH.1) RS485 INPUT-
2. (CH.1) RS485 INPUT+
3. (CH.1) RS485 OUTPUT-
4. (CH.1) RS485 OUTPUT+
5. GND


SR-1W1K/1K-X

PINOUT DIAGRAM

(RS-485 4-WIRE)

STATUS INDICATORS

DR1 - (CH.1) DATA OUTPUT
 DR2 - NA
 AR1 - NA
 AR2 - NA
 CR1 - NA
 CR2 - NA
 DT1 - (CH.1) DATA INPUT
 DT2 - NA
 AT1 - NA
 AT2 - NA
 CT1 - NA
 CT2 - NA

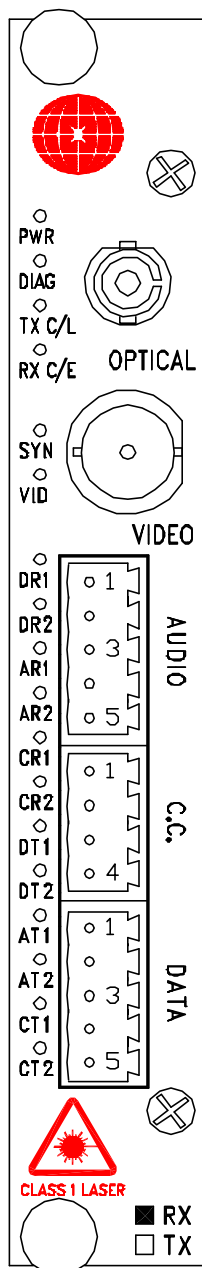

OPTICAL PORT (ST, FC)

STATUS INDICATORS

PWR - POWER (GREEN)
 DIAG - CARD DIAGNOSTIC (GREEN-OK, RED-ALARM)
 TX C/L - TX CARRIER (GREEN) / OVERLOAD (RED)
 RX C/E - RX CARRIER (GREEN) / ERROR (RED)

VIDEO OUTPUT

STATUS INDICATORS

SYN - SYNC PRESENT (GREEN)
 VID - VIDEO PRESENT (GREEN) / OVERLOAD (RED)

AUDIO N/A

CC N/A

DATA INPUT/OUTPUT

1. (CH.1) RS485 INPUT-
2. (CH.1) RS485 INPUT+
3. (CH.1) RS485 OUTPUT-
4. (CH.1) RS485 OUTPUT+
5. GND