


ST-1W2A2C2G-X

PINOUT DIAGRAM

STATUS INDICATORS

DR1 - NA
 DR2 - NA
 AR1 - NA
 AR2 - NA
 CR1 - NA
 CR2 - NA
 DT1 - (CH.1) DATA INPUT
 DT2 - (CH.2) DATA INPUT
 AT1 - (CH.1) AUDIO INPUT
 AT2 - (CH.2) AUDIO INPUT
 CT1 - (CH.1) C/C INPUT
 CT2 - (CH.2) C/C INPUT

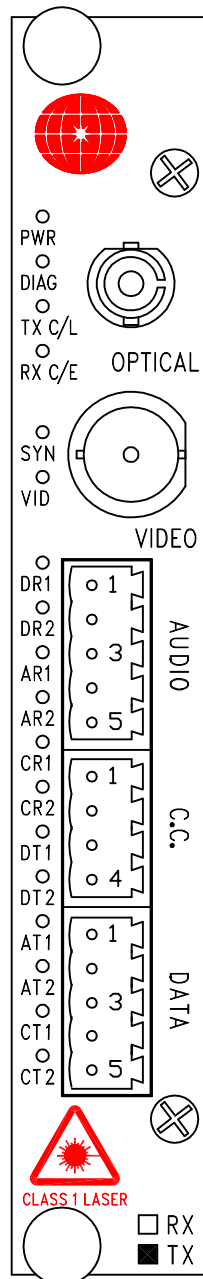

OPTICAL PORT (ST, FC)

STATUS INDICATORS

PWR - POWER (GREEN)
 DIAG - NA
 TX C/L - TX CARRIER (GREEN) / OVERLOAD (RED)
 RX C/E - RX CARRIER (GREEN) / ERROR (RED)

VIDEO INPUT

STATUS INDICATORS

SYN - SYNC PRESENT (GREEN)
 VID - VIDEO PRESENT (GREEN) / OVERLOAD (RED)

AUDIO INPUT

1. (CH.1) AUDIO INPUT-
2. (CH.1) AUDIO INPUT+
3. (CH.2) AUDIO INPUT-
4. (CH.2) AUDIO INPUT+
5. GND

CC INPUT

1. (CH.1) CC INPUT
2. (CH.1) GND
3. (CH.2) CC INPUT
4. (CH.2) GND

DATA INPUT

1. (CH.1) RS232 INPUT / RS422 INPUT- / RS485 (4W) INPUT- / RS485 (2W) INPUT/OUTPUT-
2. (CH.1) RS422 INPUT+ / RS485 (4W) INPUT+ / RS485 (2W) INPUT/OUTPUT+
3. (CH.2) RS232 INPUT / RS422 INPUT-
4. (CH.2) RS422 INPUT+
5. GND

SR-1W2A2C2G-X

PINOUT DIAGRAM

