

ST-AiphoneLEF-XS

PINOUT DIAGRAM


STATUS INDICATORS

PWR - POWER (GREEN)
 DIAG - CARD DIAGNOSTIC*
 (GREEN-OK, RED-ALARM)
 TX C/L - TX CARRIER (GREEN)
 / OVERLOAD (RED)
 RX C/E - RX CARRIER (GREEN)
 / ERROR (RED)

 SYN - SYNC PRESENT (GREEN)
 VID - VIDEO PRESENT (GREEN)
 / OVERLOAD (RED)

STATUS INDICATORS

- 1 - NA
- 2 - NA
- 3 - (CH.1) AUDIO OUTPUT
- 4 - NA
- 5 - (CH.1) C/C OUTPUT
- 6 - NA
- 7 - NA
- 8 - NA
- 9 - (CH.1) AUDIO INPUT
- 10 - NA
- 11 - (CH.1) C/C INPUT
- 12 - NA

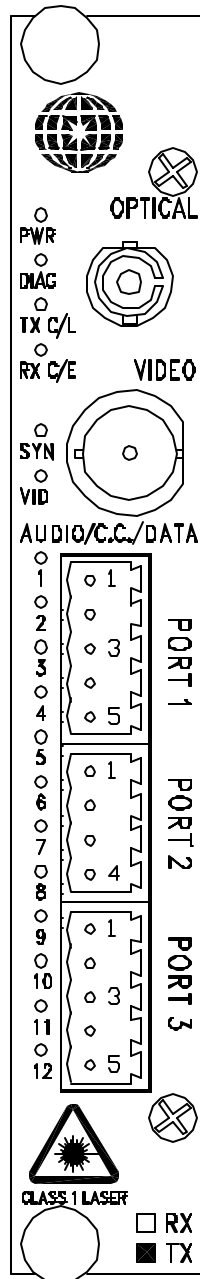

OPTICAL PORT (ST, FC)

VIDEO INPUT

PORT 1 AUDIO INPUT/OUTPUT

- 1. (CH.1) AUDIO INPUT / OUTPUT
- 2. NA
- 3. NA
- 4. NA
- 5. GND

PORT 2 CC INPUT/OUTPUT

- 1. (CH.1) CC OUTPUT-
- 2. (CH.1) CC OUTPUT+
- 3. (CH.1) CC INPUT
- 4. (CH.1) GND

PORT 3 N/A

MERIDIAN TECHNOLOGIES INC.
 700 ELMONT ROAD, ELMONT, N.Y. 11003
 Support: 516-285-1000, 919-847-6638

* CARD DIAGNOSTIC IF APPLICABLE

WWW.MERIDIAN-TECH.COM

FILE NAME: STSR-1W1B1C-1B1C-XS.DWG
 07/26/2013 V.1

SR-AiphoneLEF-XS

PINOUT DIAGRAM


STATUS INDICATORS

PWR - POWER (GREEN)
 DIAG - CARD DIAGNOSTIC*
 (GREEN-OK, RED-ALARM)
 TX C/L - TX CARRIER (GREEN)
 / OVERLOAD (RED)
 RX C/E - RX CARRIER (GREEN)
 / ERROR (RED)

 SYN - SYNC PRESENT (GREEN)
 VID - VIDEO PRESENT (GREEN)
 / OVERLOAD (RED)

STATUS INDICATORS

- 1 - NA
- 2 - NA
- 3 - (CH.1) AUDIO OUTPUT
- 4 - NA
- 5 - (CH.1) C/C OUTPUT
- 6 - NA
- 7 - NA
- 8 - NA
- 9 - (CH.1) AUDIO INPUT
- 10 - NA
- 11 - (CH.1) C/C INPUT
- 12 - NA

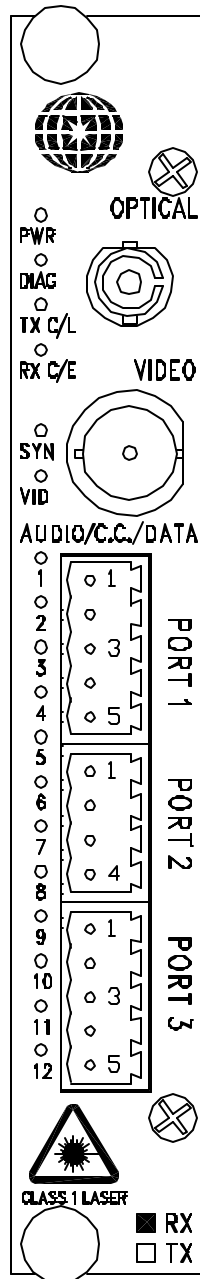

OPTICAL PORT (ST, FC)

VIDEO OUTPUT

PORT 1 AUDIO INPUT/OUTPUT

- 1. (CH.1) AUDIO INPUT / OUTPUT
- 2. NA
- 3. NA
- 4. NA
- 5. GND

PORT 2 CC INPUT/OUTPUT

- 1. (CH.1) CC OUTPUT-
- 2. (CH.1) CC OUTPUT+
- 3. (CH.1) CC INPUT
- 4. (CH.1) GND

PORT 3 N/A