


SX-1A1C1D-XS

(TWO FIBER)

PINOUT DIAGRAM

STATUS INDICATORS

PWR - POWER (GREEN)
 DIAG - NA
 TX C/L - TX CARRIER (GREEN)
 / OVERLOAD (RED)
 RX C/E - RX CARRIER (GREEN)
 / ERROR (RED)

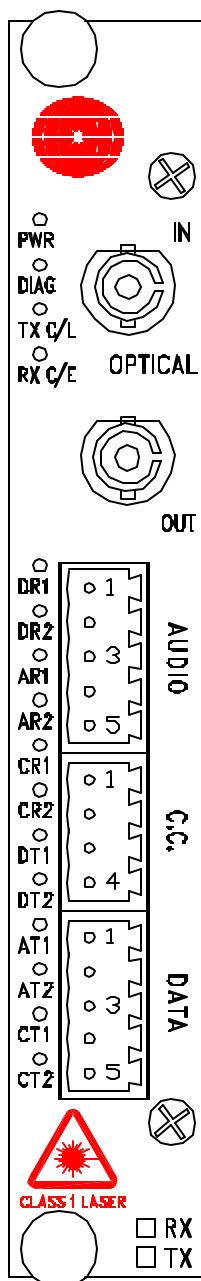

OPTICAL PORT INPUT (ST, FC)

OPTICAL PORT OUTPUT (ST, FC)

AUDIO INPUT/OUTPUT

1. (CH.1) AUDIO INPUT-
2. (CH.1) AUDIO INPUT+
3. (CH.2) AUDIO OUTPUT-
4. (CH.2) AUDIO OUTPUT+
5. GND

CC INPUT/OUTPUT

1. (CH.1) CC OUTPUT-
2. (CH.1) CC OUTPUT+
3. (CH.1) CC INPUT
4. (CH.1) GROUND

DATA INPUT/OUTPUT

1. (CH.1) RS232 INPUT (RD)
2. NA
3. (CH.1) RS232 OUTPUT (TD)
4. NA
5. GND

STATUS INDICATORS

DR1 - (CH.1) DATA OUTPUT
 DR2 - NA
 AR1 - (CH.1) AUDIO OUTPUT
 AR2 - NA
 CR1 - (CH.1) C/C OUTPUT
 CR2 - NA
 DT1 - (CH.1) DATA INPUT
 DT2 - NA
 AT1 - (CH.1) AUDIO INPUT
 AT2 - NA
 CT1 - (CH.1) C/C INPUT
 CT2 - NA

MERIDIAN TECHNOLOGIES INC.
 700 ELMONT ROAD, ELMONT, N.Y. 11003
 Support: 516-285-1000,
 919-847-6638, 858-605-1070

WWW.MERIDIAN-TECH.COM

FILE NAME: SXASXB-1A1C1D/1A1C1D-XS.DWG
 02/01/2010 V.0

CONNECTION DIAGRAM

(TWO FIBER)

SX-1A1C1D-XS

SX-1A1C1D-XS

