

SX-1D-X


PINOUT DIAGRAM

STATUS INDICATORS

PWR - POWER (GREEN)
 DIAG - NA
 TX C/L - TX CARRIER (GREEN)
 /OVERLOAD (RED)
 RX C/E - RX CARRIER (GREEN)
 /ERROR (RED)

SYN - NA
 VID - NA

DR1 - (CH.1) DATA OUTPUT
 DR2 - NA
 AR1 - NA
 AR2 - NA
 CR1 - NA
 CR2 - NA
 DT1 - (CH.1) DATA INPUT
 DT2 - NA
 AT1 - NA
 AT2 - NA
 CT1 - NA
 CT2 - NA

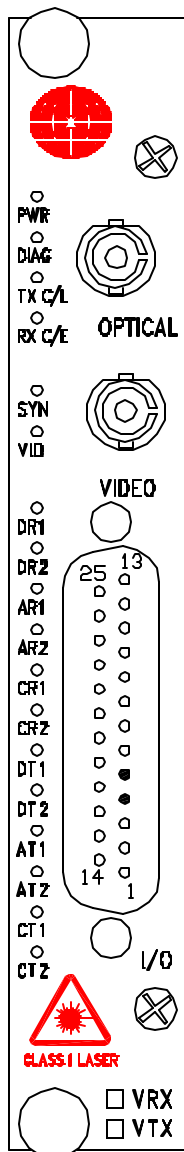

OPTICAL PORT IN (ST, FC)

OPTICAL PORT OUT (ST, FC)

DATA INPUT/OUTPUT
 (DB-25 FEMALE)

1. GND
4. (CH.1) RS232 INPUT
5. (CH.1) RS232 OUTPUT
7. GND

MERIDIAN TECHNOLOGIES INC.
 700 ELMONT ROAD, ELMONT, N.Y. 11003
 Support: 516-285-1000,
 919-847-6638, 858-605-1070
WWW.MERIDIAN-TECH.COM

FILE NAME: SX-2A2C2G-2A2C2G.DWG

12/27/2011 V.0