

SX-2C2F/2C2F-X


PINOUT DIAGRAM

STATUS INDICATORS

PWR - POWER (GREEN)
 DIAG NA
 TX C/L - TX CARRIER (GREEN)
 /OVERLOAD (RED)
 RX C/E - RX CARRIER (GREEN)
 /ERROR (RED)

SYN - NA
 VID - NA

DR1 - (CH.1) DATA OUTPUT
 DR2 - (CH.2) DATA OUTPUT
 AR1 - NA
 AR2 - NA
 CR1 - (CH.1) C/C OUTPUT
 CR2 - (CH.2) C/C OUTPUT
 DT1 - (CH.1) DATA INPUT
 DT2 - (CH.2) DATA INPUT
 AT1 - NA
 AT2 - NA
 CT1 - (CH.1) C/C INPUT
 CT2 - (CH.2) C/C INPUT

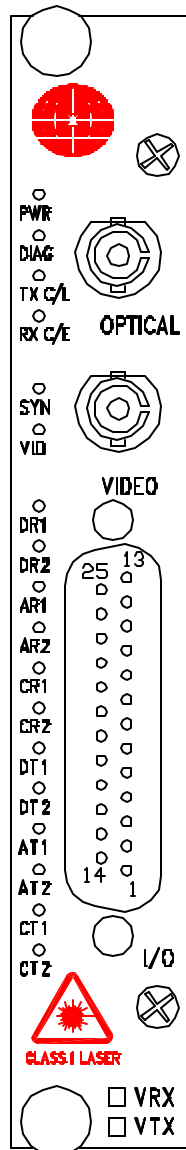

OPTICAL PORT IN (ST, FC)

OPTICAL PORT OUT (ST, FC)

DATA INPUT/OUTPUT
 (DB-25 FEMALE)

- 6. (CH.1) CC INPUT
- 20. (CH.1) CC OUTPUT-
- 8. (CH.1) CC OUTPUT+
- 18. (CH.2) CC INPUT
- 21. (CH.2) CC OUTPUT-
- 9. (CH.2) CC OUTPUT+
- 4. (CH.1) RS422 INPUT-
- 16. (CH.1) RS422 INPUT+
- 5. (CH.1) RS422 OUTPUT-
- 17. (CH.1) RS422 OUTPUT+
- 2. (CH.2) RS422 INPUT-
- 14. (CH.2) RS422 INPUT+
- 3. (CH.2) RS422 OUTPUT-
- 15. (CH.2) RS422 OUTPUT+
- 19. +5V
- 1. GND
- 7. GND

MERIDIAN TECHNOLOGIES INC.
 700 ELMONT ROAD, ELMONT, N.Y. 11003
 Support: 516-285-1000,
 919-847-6638

WWW.MERIDIAN-TECH.COM

FILE NAME: SX-2C2F-2C2F.DWG

09/25/2012 V.0