

SX-2RE-SFP

PINOUT DIAGRAM

STATUS INDICATORS

PWR - POWER (GREEN)
 DIAG - CARD DIAGNOSTIC
 (GREEN-OK, RED-ALARM)

STATUS INDICATORS CH.1


- 1 - COPPER PORT ACTIVITY FLASHING (GREEN)
- 2 - COPPER CONNECTION ESTABLISHED (GREEN)

TX - TX CARRIER (GREEN)
 RX - RX CARRIER (GREEN)

STATUS INDICATORS CH.2

- 1 - COPPER PORT ACTIVITY FLASHING (GREEN)
- 2 - COPPER CONNECTION ESTABLISHED (GREEN)

TX - TX CARRIER (GREEN)
 RX - RX CARRIER (GREEN)

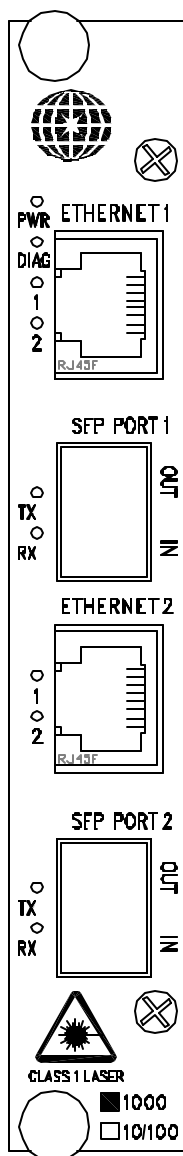

1000 ETHERNET INPUT/OUTPUT CH.1
 (RJ-45 FEMALE)

SFP OPTICAL PORT IN/OUT CH.1

1000 ETHERNET INPUT/OUTPUT CH.2
 (RJ-45 FEMALE)

SFP OPTICAL PORT IN/OUT CH.2

MERIDIAN TECHNOLOGIES INC.
 700 ELMONT ROAD, ELMONT, N.Y. 11003
 Support: 516-285-1000,
 support@meridian-tech.com
WWW.MERIDIAN-TECH.COM

* CARD DIAGNOSTIC IF APPLICABLE

FILE NAME: SX-2RE-SFP.DWG
 07/22/2014 V.1