


SXA/SXB-1A1C1D/1A1C1D-XS

PINOUT DIAGRAM

STATUS INDICATORS

DR1 - <CH.1> DATA OUTPUT
 DR2 - NA
 AR1 - <CH.1> AUDIO OUTPUT
 AR2 - NA
 CR1 - <CH.1> C/C OUTPUT
 CR2 - NA
 DT1 - <CH.1> DATA INPUT
 DT2 - NA
 AT1 - <CH.1> AUDIO INPUT
 AT2 - NA
 CT1 - <CH.1> C/C INPUT
 CT2 - NA

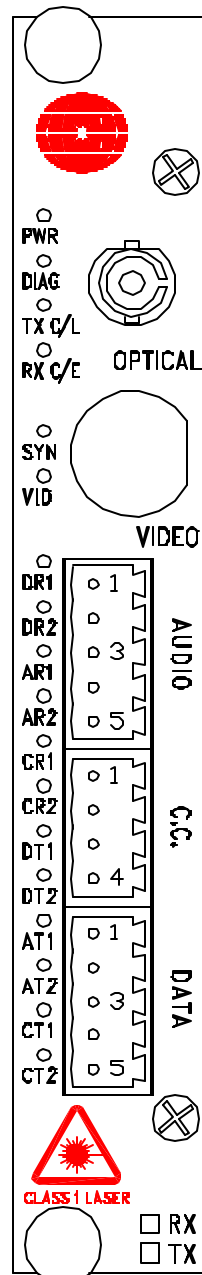

OPTICAL PORT (ST, FC)

STATUS INDICATORS

PWR - POWER (GREEN)

DIAG - NA

TX C/L - TX CARRIER (GREEN) / OVERLOAD (RED)

RX C/E - RX CARRIER (GREEN) / ERROR (RED)

SYN - NA

VID - NA

AUDIO INPUT/OUTPUT

1. <CH.1> AUDIO INPUT-
2. <CH.1> AUDIO INPUT+
3. <CH.2> AUDIO OUTPUT-
4. <CH.2> AUDIO OUTPUT+
5. GND

CC INPUT/OUTPUT

1. <CH.1> CC OUTPUT-
2. <CH.1> CC OUTPUT+
3. <CH.1> CC INPUT
4. <CH.1> GROUND

DATA INPUT/OUTPUT

1. <CH.1> RS232 INPUT (RD)
2. NA
3. <CH.1> RS232 OUTPUT (TD)
4. NA
5. GND

MERIDIAN TECHNOLOGIES INC.
700 ELMONT ROAD, ELMONT, N.Y. 11003

Support: 516-285-1000,

919-847-6638, 858-605-1070

WWW.MERIDIAN-TECH.COM

FILE NAME: SXASXB-1A1C1D/1A1C1D-XS.DWG
02/01/2010 V.0