SXA/SXB-1A2D/1A2D-XS

PINOUT DIAGRAM

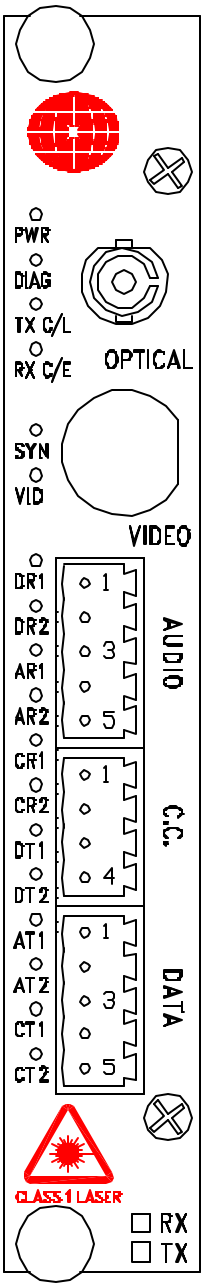

OPTICAL PORT (ST, FC)

STATUS INDICATORS

PWR - POWER (GREEN)
DIAG - NA
TX C/L - TX CARRIER (GREEN) / OVERLOAD (RED)
RX C/E - RX CARRIER (GREEN) / ERROR (RED)

AUDIO INPUT/OUTPUT

1. (CH.1) AUDIO INPUT-
2. (CH.1) AUDIO INPUT+
3. (CH.1) AUDIO OUTPUT-
4. (CH.1) AUDIO OUTPUT+
5. GND

C.C. NA

DATA INPUT/OUTPUT

1. (CH.1) RS-232 INPUT (RD)
2. (CH.1) RS-232 OUTPUT (TD)
3. (CH.2) RS-232 INPUT (DTR)
4. (CH.2) RS232 OUTPUT (DSR)
5. GND

STATUS INDICATORS

DR1 - (CH.1) DATA OUTPUT
DR2 - (CH.2) DATA OUTPUT
AR1 - (CH.1) AUDIO OUTPUT
AR2 - NA
CR1 - NA
CR2 - NA
DT1 - (CH.1) DATA INPUT
DT2 - (CH.2) DATA INPUT
AT1 - (CH.1) AUDIO INPUT
AT2 - NA
CT1 - NA
CT2 - NA

MERIDIAN TECHNOLOGEIS INC.
FILE NAME: SXASXB-1A2D-1A2D-XS.DWG
08/23/10 V.0