


SXA/SXB-1K/1K-X

PINOUT DIAGRAM

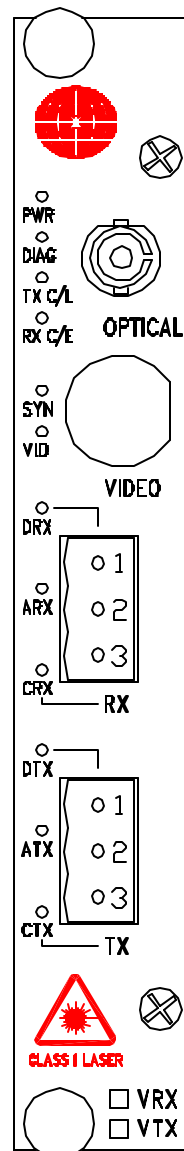

OPTICAL PORT (ST, FC)

STATUS INDICATORS

PWR - POWER (GREEN)

DIAG - NA

TX C/L - TX CARRIER (GREEN) / OVERLOAD (RED)

RX C/E - RX CARRIER (GREEN) / ERROR (RED)

SYN - NA

VID - NA

DATA OUTPUT

1. <CH.1> OUTPUT-
2. GND
3. <CH.1> OUTPUT+

STATUS INDICATORS

DRX - DATA OUTPUT

ARX - NA

CRX - NA

DATA INPUT

1. <CH.1> INPUT-
2. GND
3. <CH.1> INPUT+

STATUS INDICATORS

DTX - DATA INPUT

ATX - NA

CTX - NA