


SXA-2A/2A-X

PINOUT DIAGRAM

STATUS INDICATORS

PWR - POWER (GREEN)
 DIAG - NA
 TX C/L - TX CARRIER (GREEN)
 /OVERLOAD (RED)
 RX C/E - RX CARRIER
 (GREEN)/ERROR (RED)
 SYN - NA
 VID - NA

DR1 - NA
 DR2 - NA
 AR1 - (CH.1) AUDIO OUTPUT
 AR2 - (CH.2) AUDIO OUTPUT
 CR1 - NA
 CR2 - NA
 DT1 - NA
 DT2 - NA
 AT1 - (CH.1) AUDIO INPUT
 AT2 - (CH.2) AUDIO INPUT
 CT1 - NA
 CT2 - NA

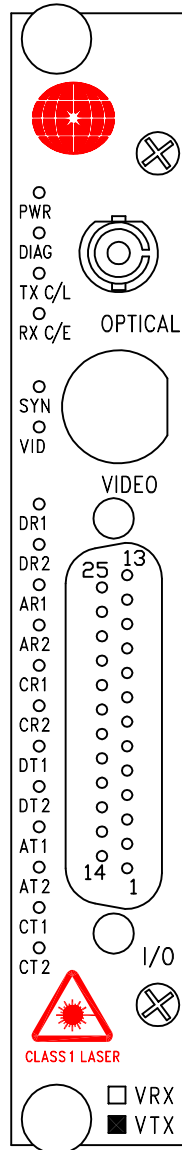

OPTICAL PORT (ST, FC)

AUDIO INPUT/OUTPUT (DB-25 FEMALE)

22. (CH.1) AUDIO INPUT-
 10. (CH.1) AUDIO INPUT+
 12. (CH.1) AUDIO OUTPUT-
 24. (CH.1) AUDIO OUTPUT+
 23. (CH.2) AUDIO INPUT-
 11. (CH.2) AUDIO INPUT+
 13. (CH.2) AUDIO OUTPUT-
 25. (CH.2) AUDIO OUTPUT+
 1. GND
 7. GND


SXB-2A/2A-X

PINOUT DIAGRAM

STATUS INDICATORS

PWR - POWER (GREEN)
 DIAG - NA
 TX C/L - TX CARRIER (GREEN)
 /OVERLOAD (RED)
 RX C/E - RX CARRIER
 (GREEN)/ERROR (RED)
 SYN - NA
 VID - NA

DR1 - NA
 DR2 - NA
 AR1 - (CH.1) AUDIO OUTPUT
 AR2 - (CH.2) AUDIO OUTPUT
 CR1 - NA
 CR2 - NA
 DT1 - NA
 DT2 - NA
 AT1 - (CH.1) AUDIO INPUT
 AT2 - (CH.2) AUDIO INPUT
 CT1 - NA
 CT2 - NA

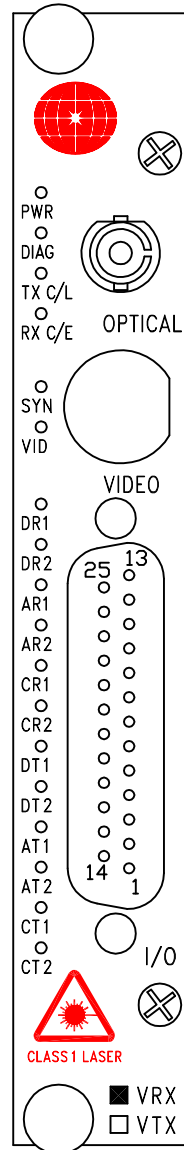

OPTICAL PORT (ST, FC)

AUDIO INPUT/OUTPUT (DB-25 FEMALE)

22. (CH.1) AUDIO INPUT-
 10. (CH.1) AUDIO INPUT+
 12. (CH.1) AUDIO OUTPUT-
 24. (CH.1) AUDIO OUTPUT+
 23. (CH.2) AUDIO INPUT-
 11. (CH.2) AUDIO INPUT+
 13. (CH.2) AUDIO OUTPUT-
 25. (CH.2) AUDIO OUTPUT+
 1. GND
 7. GND